
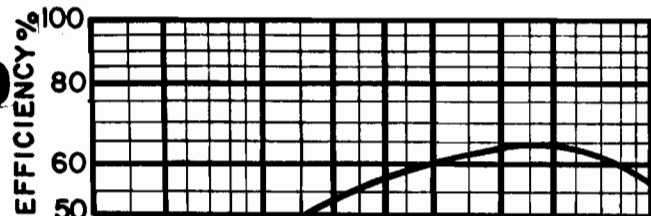
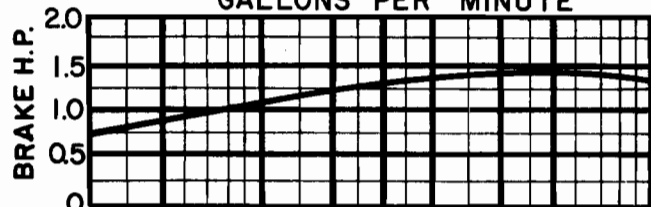


PIONEER

PA 75 SELECTION CURVES

PAGE: 300-009
DATE: 6-27-79
SUPERSEDES: 4-17-78

60 HERTZ

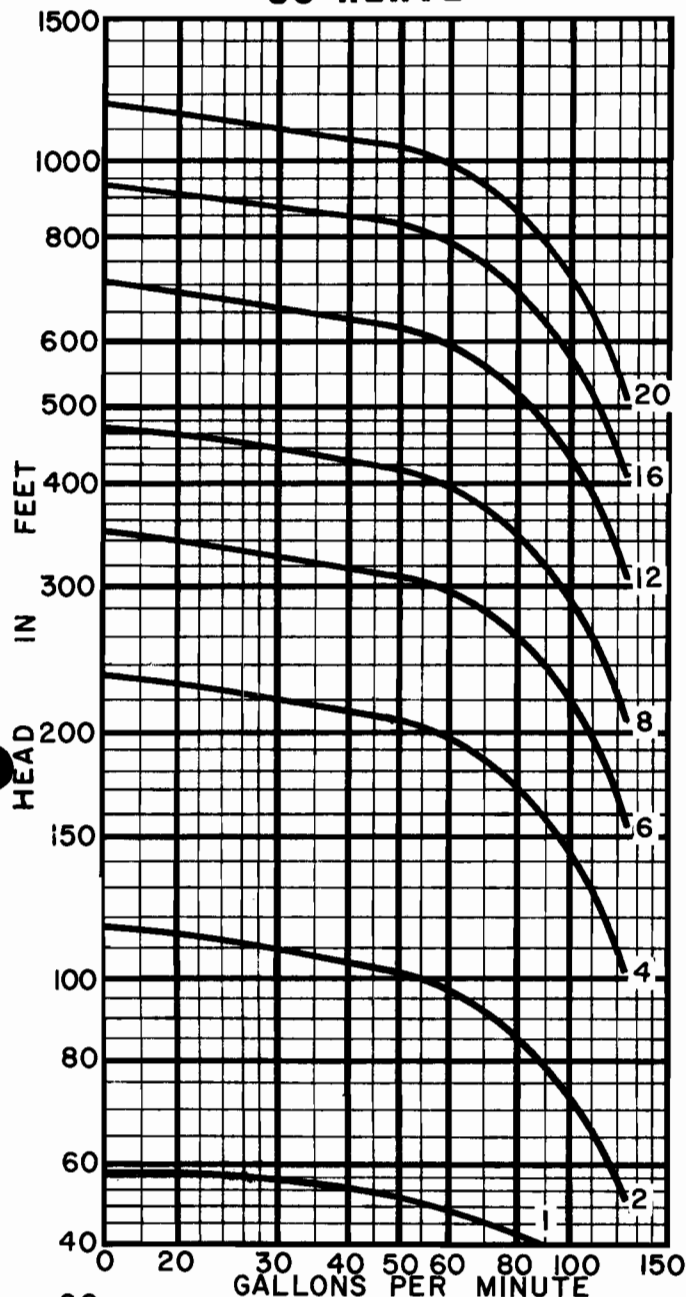


50 TO 125 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PA7512F	1½	230	11.5
	PA7532F		230	6.3
	PA7534F		460	3.1
2	PA7512H	3	230	16.5
	PA7532H		230	11.4
	PA7534H		460	5.7
4	PA7512J	5	230	27.5
	PA7532J		230	17.4
	PA7534J		460	8.7
6	PA7512K	7½	230	40.0
	PA7532K		230	26.8
	PA7534K		460	13.4
8	PA7512L	10	230	52.0
	PA7532L		230	32.0
	PA7534L		460	16.0
12	PA7532M	15	230	46.6
	PA7534M		460	23.3
16	PA7532N	20	230	61.0
	PA7534N		460	30.5
20	PA7532P	25	230	75.0
	PA7534P		460	37.5

Service Factor 1.15

WELL
SIZE
6"

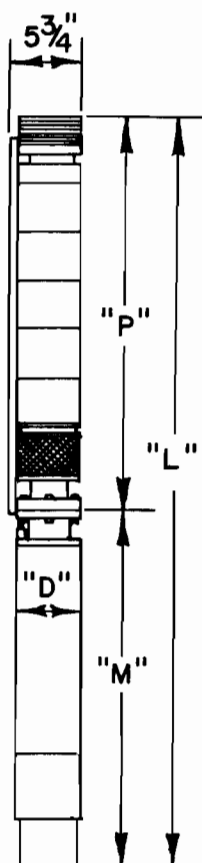

OPEN IMPELLER

23055	3.7
IMP. DRG.	K
23000	3450
BOWL DRG.	R.P.M.
5 3/8	4.1
BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	1½	3.75	19.9	17.3	37.2
2	3		23.0	21.0	44.0
4	5		28.5	28.6	57.1
6	7½	5.37	30.7	39.8	70.5
8	10		34.4	43.6	78.0
12	15		34.4	58.6	93.0
16	20	5.37	38.4	73.6	112
20	25		42.4	88.7	131.1

Dimensions in Inches