

PIONEER

PE 125

SELECTION CURVES




PAGE: 300-020

DATE: 6-15-79

SUPERSEDES:


60 HERTZ

70 TO 160 G.P.M.

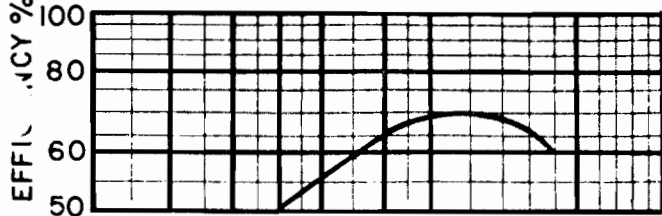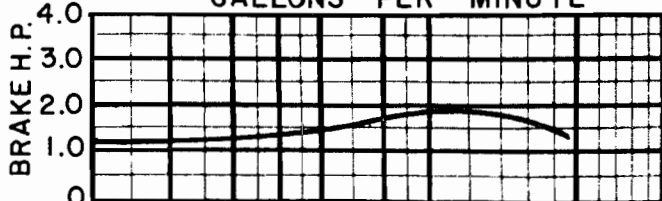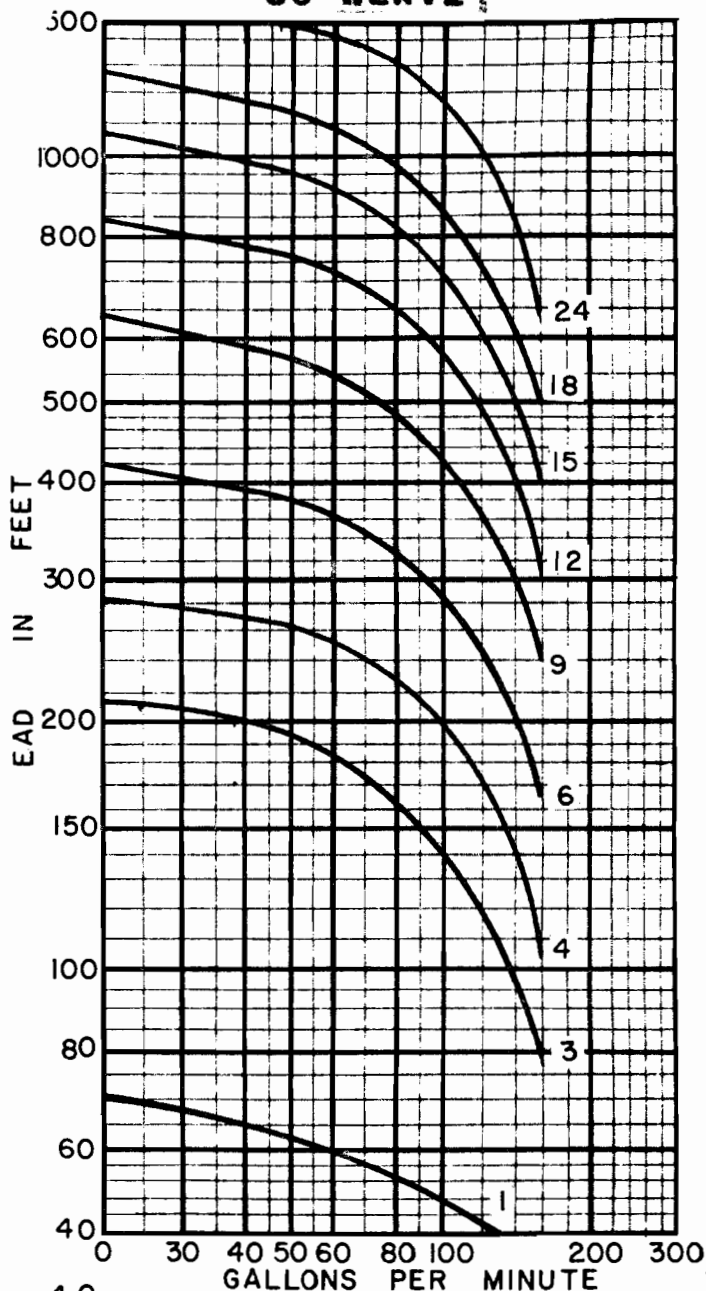

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PE12512H	3	230	16.5
	PE12532H		230	11.4
	PE12534H		460	5.7
3	PE12512J	5	230	27.5
	PE12532J		230	17.4
	PE12534J		460	8.7
4	PE12512K	7½	230	40.0
	PE12532K		230	26.8
	PE12534K		460	13.4
6	PE12512L	10	230	52.0
	PE12532L		230	32.0
	PE12534L		460	16.0
9	PE12532M	15	230	46.6
	PE12534M		460	23.3
12	PE12532N	20	230	61.0
	PE12534N		460	30.5
15	PE12532P	25	230	75.0
	PE12534P		460	37.5
18	PE12532R	30	230	92.0
	PE12534R		460	46.0
24	PE12534S	40	460	60.0

Service Factor 1.15

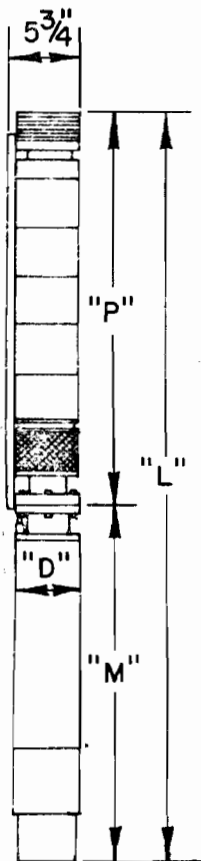

ENCLOSED IMPELLER

23221	2.0
IMP. DRG.	K
23000	3450
BOWL DRG.	R.P.M.
5 3/8	5.89
BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS	HP	D	M	P	L
1	3	3.75	23.0	17.3	40.3
3	5		28.5	24.8	53.3
4	7½		30.7	28.6	59.3
6	10	5.37	34.4	39.8	74.2
9	15		34.4	47.4	81.8
12	20		38.4	58.6	97
15	25	5.37	42.4	69.9	112.3
18	30		42.4	81.2	123.6
24	40		68.8	103.6	172

Dimensions in Inches

WELL
SIZE
6"