
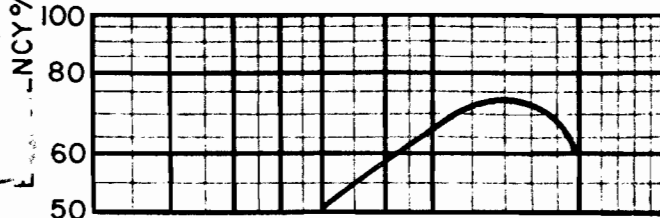
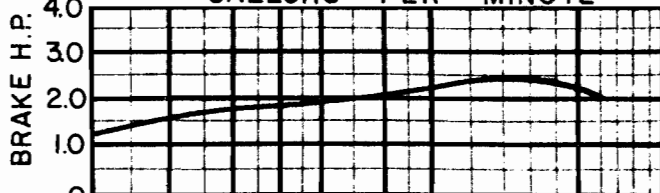


PIONEER

PE 150 SELECTION CURVES

PAGE: 300-021
DATE: 6-14-79
SUPERSEDES:

60 HERTZ

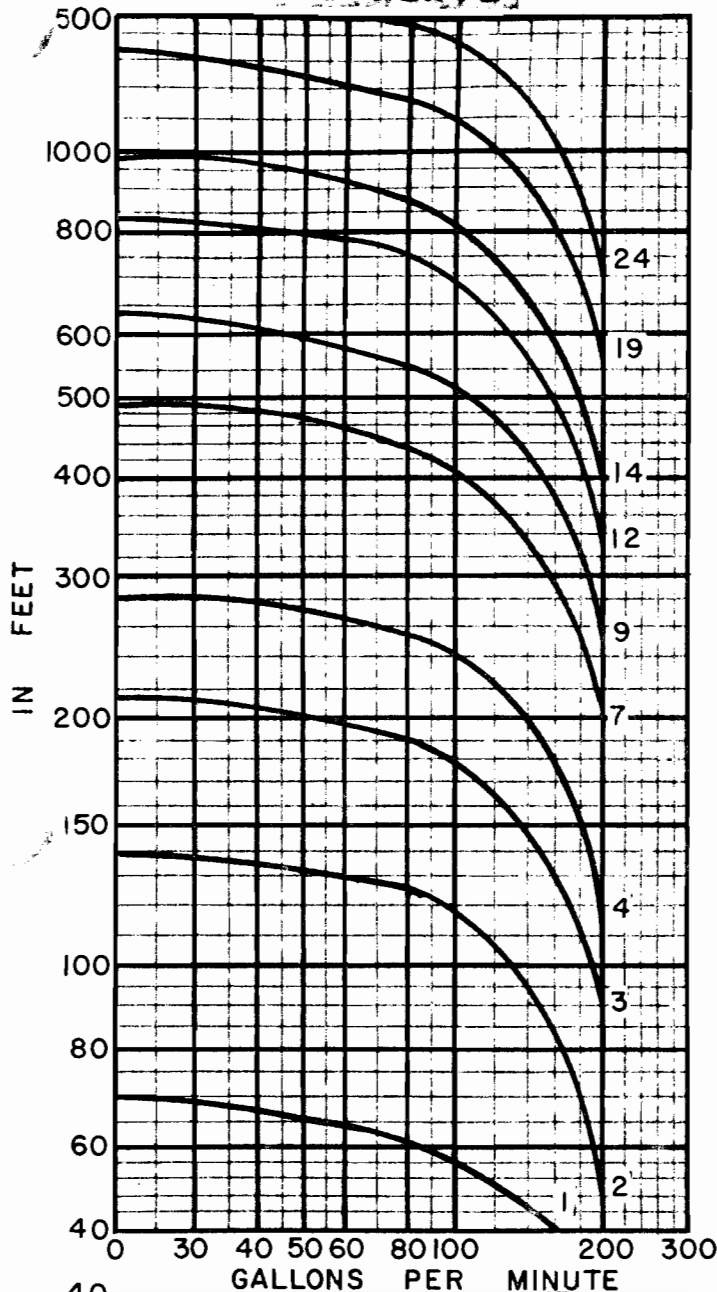

60 TO 200 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PE15012H	3	230	16.5
	PE15032H		230	11.4
	PE15034H		460	5.7
2	PE15012J	5	230	27.5
	PE15032J		230	17.4
	PE15034J		460	8.7
3	PE15012K	7½	230	40.0
	PE15032K		230	26.8
	PE15034K		460	13.4
4	PE15012L	10	230	52.0
	PE15032L		230	32.0
	PE15034L		460	16.0
7	PE15032M	15	230	46.6
	PE15034M		460	23.3
9	PE15032N	20	230	61.0
	PE15034N		460	30.5
12	PE15032P	25	230	75.0
	PE15034P		460	37.5
14	PE15032R	30	230	92.0
	PE15034R		460	46.0
19	PE15034S	40	460	60.0
24	PE15034T	50	460	75.0

Service Factor 1.15

ENCLOSED IMPELLER


23222	2.0
IMP. DRG.	K
23000	3450
BOWL DRG.	R.P.M.
5 3/8	5.70
BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	3	3.75	23.0	17.3	40.3
2	5		28.5	21.0	49.5
3	7½	5.37	30.7	24.8	55.5
4	10		34.4	28.6	63.0
7	15		34.4	39.8	74.2
9	20	5.37	38.4	47.4	85.8
12	25		42.4	58.6	101
14	30		42.4	66.1	108.5
19	40	5.37	68.8	84.9	153.7
24	50		76.8	103.6	180.4

Dimensions in Inches

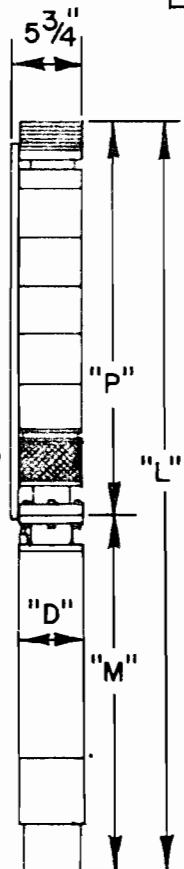

WELL
SIZE

6"