
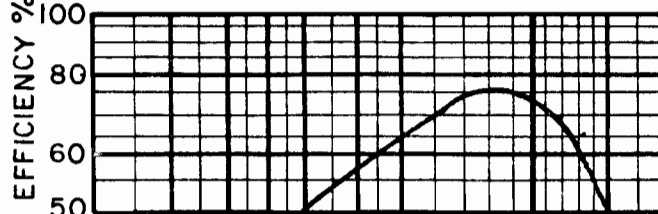
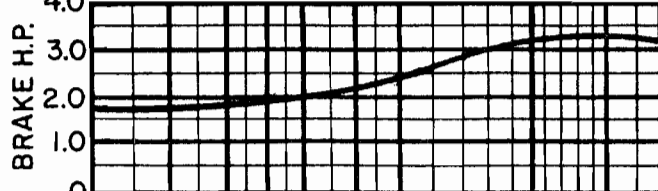


PIONEER

PE 175 SELECTION CURVES

PAGE: 300-022
DATE: 6-13-79
SUPERSEDES:

60 HERTZ

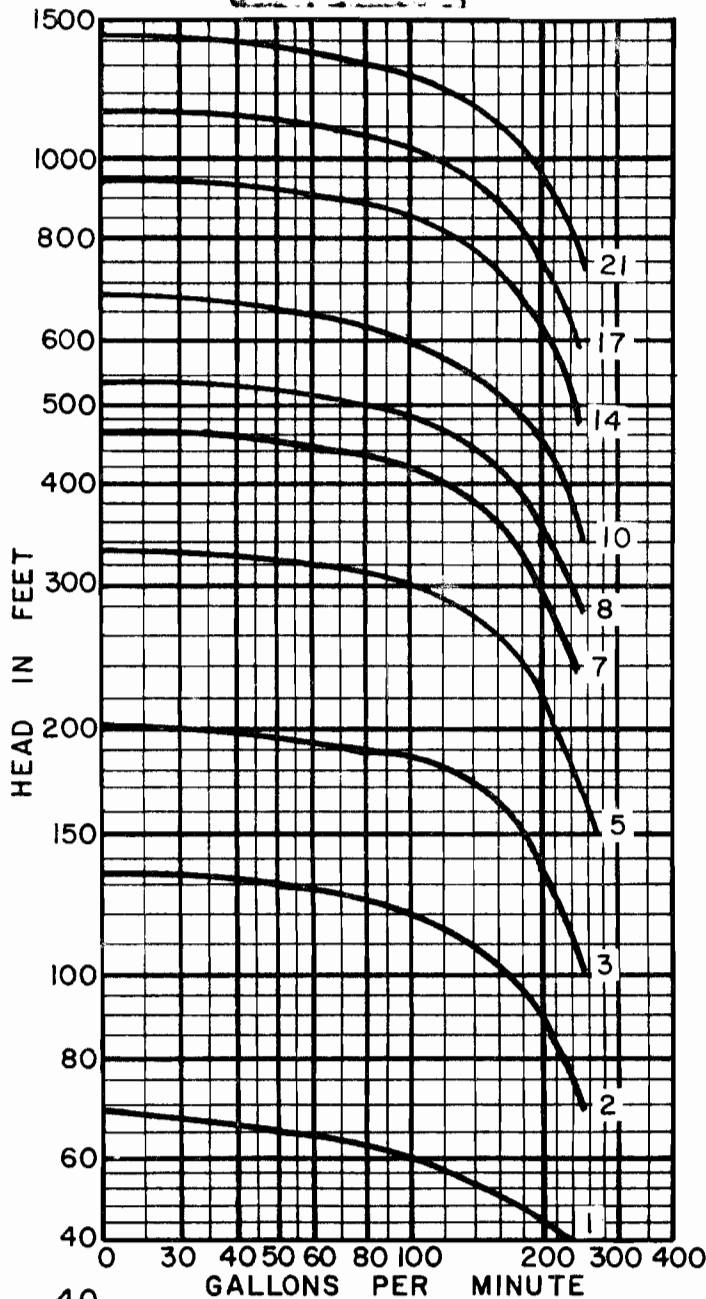

100 TO 250 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PE17512H	3	230	16.5
	PE17532H		230	11.4
	PE17534H		460	5.7
2	PE17512K	7½	230	40.0
	PE17532K		230	26.8
	PE17534K		460	13.4
3	PE17512L	10	230	52.0
	PE17532L		230	32.0
	PE17534L		460	16.0
5	PE17532M	15	230	46.6
	PE17534M		460	23.3
7	PE17532N	20	230	61.0
	PE17534N		460	30.5
8	PE17532P	25	230	75.0
	PE17534P		460	37.5
10	PE17532R	30	230	92.0
	PE17534R		460	46.0
14	PE17534S	40	460	60.0
17	PE17534T	50	460	75.0
21	PE17534U	60	460	89.0


Service Factor 1.15

ENCLOSED IMPELLER

23 223 IMP. DRG.	2.0 K
23 000 BOWL DRG.	3450 R.P.M.
5⅜ BOWL DIA.	5.35 EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

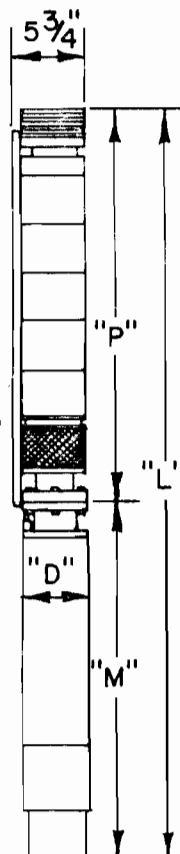

NO. STGS.	HP	D	M	P	L
1	3	3.75	28.0	17.3	45.5
2	7½		30.7	21.0	51.7
3	10	5.37	34.4	24.8	59.2
5	15		34.4	32.3	66.7
7	20		38.4	39.8	78.2
8	25	5.37	42.4	43.6	86.
10	30		42.4	51.1	93.5
14	40		68.8	66.1	134.
17	50	5.37	76.8	77.4	154.
21	60		111	92.35	203.5

Dimensions in Inches

WELL
SIZE

6"