


PIONEER

PE 225 SELECTION CURVES

PAGE: 300-023
DATE: 4-29-81
SUPERSEDES: 6-12-75

60 HERTZ

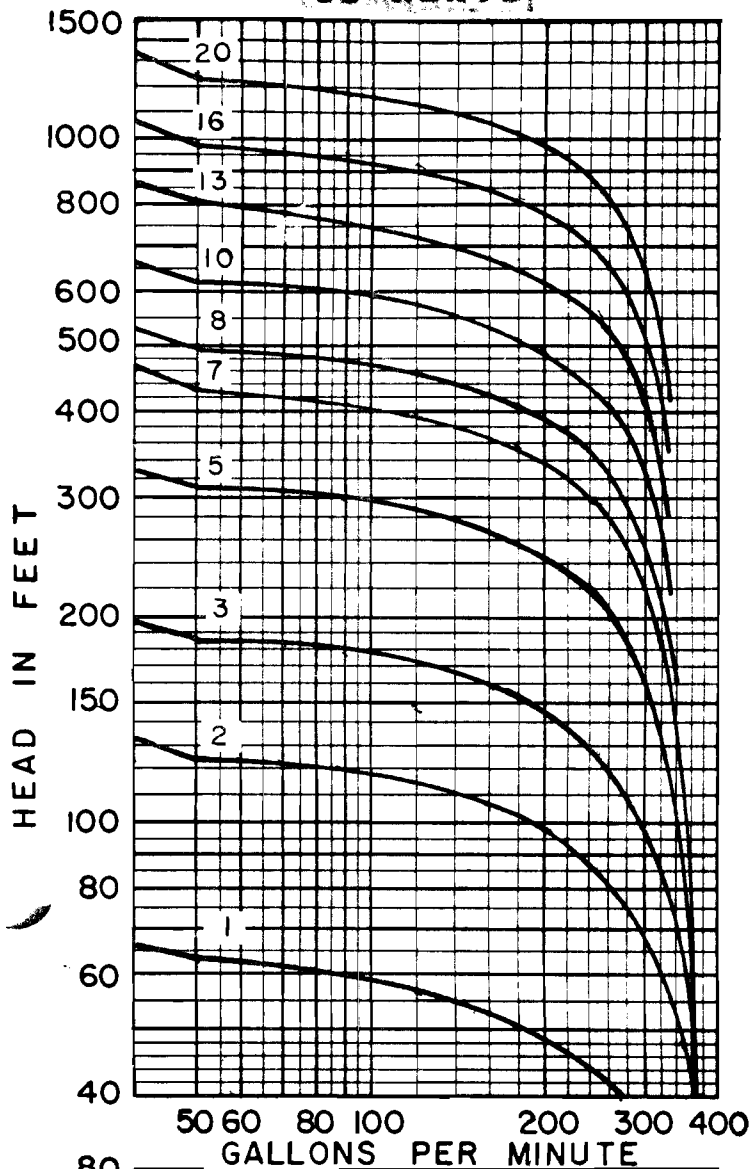

150 TO 300 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PE22512H	3	230	16.5
	PE22532H		230	11.4
	PE22534H		460	5.7
2	PE22512K	7½	230	40.0
	PE22532K		230	26.8
	PE22534K		460	13.4
3	PE22512L	10	230	52.0
	PE22532L		230	32.0
	PE22534L		460	16.0
5	PE22532M	15	230	46.6
	PE22534M		460	23.3
7	PE22532N	20	230	61.0
	PE22534N		460	30.5
8	PE22532P	25	230	75.0
	PE22534P		460	37.5
10	PE22532R	30	230	92.0
	PE22534R		460	46.0
13	PE22534S	40	460	60.0
16	PE22534T	50	460	75.0
20	PE22534U	60	460	89.0

Service Factor 1.15

**WELL
SIZE**

6"

ENCLOSED IMPELLER

23223 IMP DRG.	2.0 K
23024 BOWL DRG.	3450 R.P.M.
5 3/8 BOWL DIA.	5.35 EYE AREA

Dimension in Inches

NO. STGS.	HP	D	M	P	L
1	3	3 3/4	22 1/2	17	39 1/2
2	7½		28	22 3/4	50 3/4
3	10	5 3/8	30 3/4	27 1/2	58 1/4
5	15		34 1/2	37	71 1/2
7	20		38 1/2	46 1/2	81
8	25	5 3/8	42 1/2	51 1/4	93 3/4
10	30		42 1/2	60 3/4	103 1/4
13	40*		68 3/4	75	143 3/4
16	50*	5 3/8	76 3/4	89 1/4	166
20	60*		83	108 1/4	191 1/4

*Note: 8" Motors Also Available
7 1/2" O.D.

