

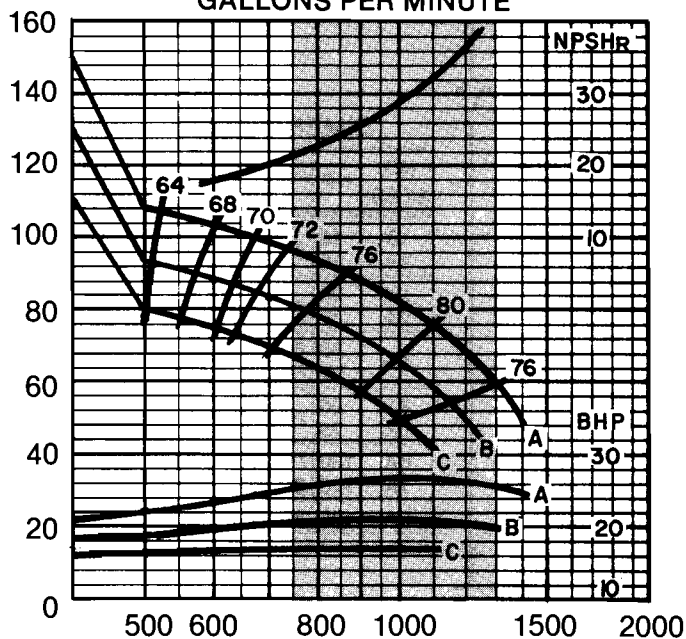


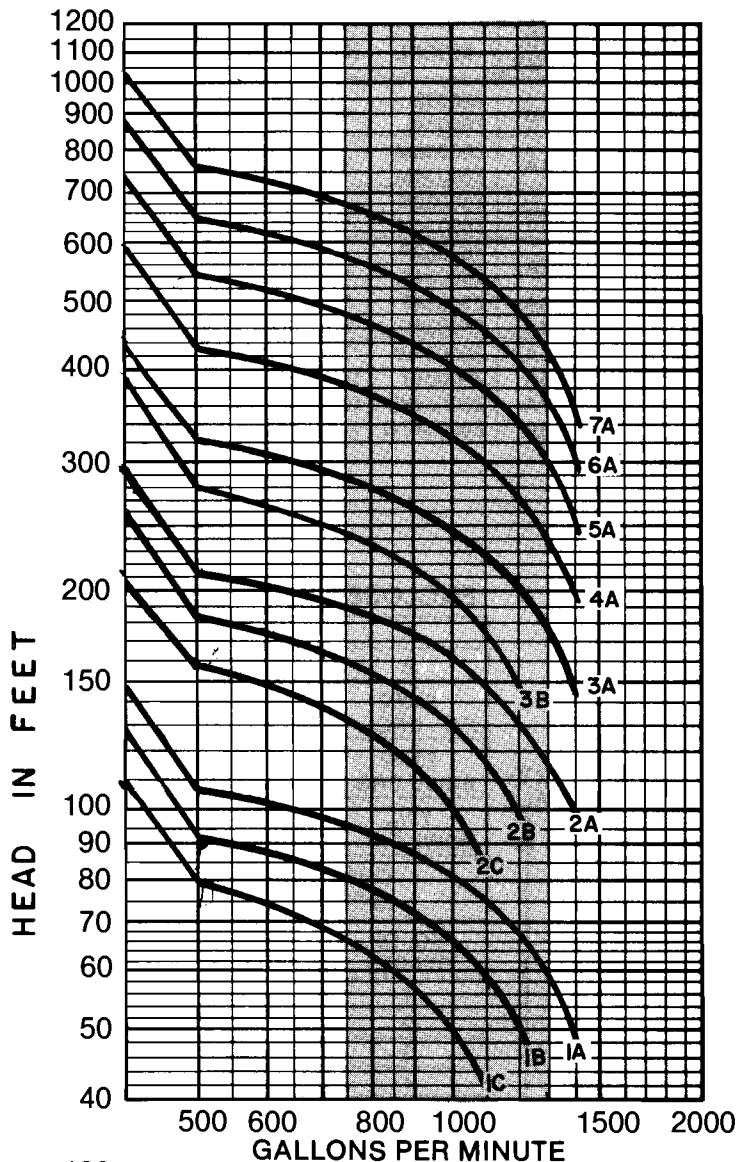

NO. OF STAGES	MODEL	HP	VOLTS	F.L.A.
1C	Z100032M	15	230	46.6
	Z100034M		460	23.3
1B	Z100032N	20	230	61.0
	Z100034N		460	30.5
1A	Z100032P	25	230	75.0
	Z100034P		460	37.5
2C	Z100032R	30	230	92.0
	Z100034R		460	46.0
2B	Z100034S	40	460	60.0
2A	Z100034T	50	460	75.0
3B	Z100034U	60	460	85.4
3A	Z100034W	75	460	115.0
4A	Z100034Y	100	460	155.0
5A	Z100034YP	125	460	170.0
6A	Z100034YT	150	460	206.5
7A	Z100034YW	175	460	252.0

ENCLOSED IMPELLER

A	6.5 DIA.
B	6.142 DIA.
C	5.840 DIA.
23076 IMP. DRG.	4.53 K
23077 BOWL DRG.	3450 R.P.M.
7 $\frac{1}{4}$ BOWL DIA.	11.7 EYE AREA
CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	- 4
2	- 3
3	- 2
4	- 1

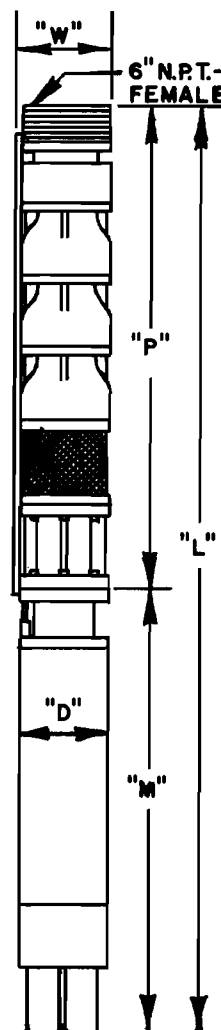

DIMENSIONS IN INCHES

NO. STGS.	HP	"D"	"M"	"P"	"L"	"W"
1C	15		34 ³ / ₈		57 ³ / ₈	
1B	20	5 ³ / ₈	38 ³ / ₈	23	61 ³ / ₈	7 ⁵ / ₈
1A	25		42 ³ / ₈		65 ³ / ₈	
2C	30		42 ³ / ₈		72 ⁷ / ₈	
2B	40	5 ³ / ₈	68 ¹¹ / ₁₆	30 ¹ / ₂	99 ³ / ₁₆	7 ⁵ / ₈
2A	50		76 ¹¹ / ₁₆		107 ³ / ₁₆	
2B	40		41 ¹ / ₈		71 ⁵ / ₈	
2A	50	7 ⁹ / ₁₆	44 ¹ / ₈	30 ¹ / ₂	74 ⁵ / ₈	8 ⁹ / ₃₂
3B	60		47 ¹ / ₈	38	85 ¹ / ₈	
3A	75	7 ⁹ / ₁₆	52 ¹ / ₈	43 ¹ / ₂	95 ⁵ / ₈	8 ⁹ / ₃₂
4A	100	7 ⁹ / ₁₆	60 ¹ / ₈	51	111 ³ / ₈	8 ⁹ / ₃₂
5A	125	8 ⁵ / ₈	68 ⁷ / ₈	58 ¹ / ₂	127 ³ / ₈	8 ³ / ₈
6A	150		74 ³ / ₈	66	140 ³ / ₈	
7A	175	8 ⁵ / ₈	78 ³ / ₈	73 ¹ / ₂	152 ¹ / ₄	8 ³ / ₈