

PIONEER




Z 325

SELECTION CURVES

PAGE: 400-019
DATE: 8-22-79
SUPERSEDES: 5-7-79


60 HERTZ

200 TO 450 G.P.M.

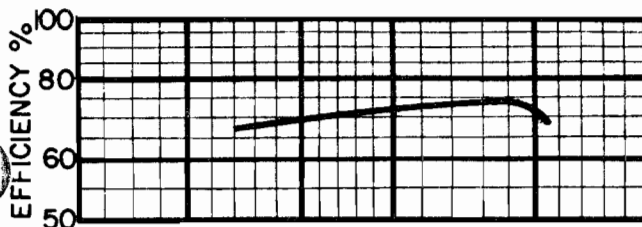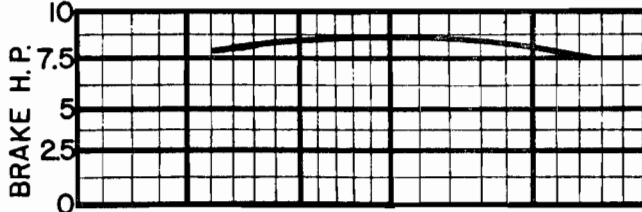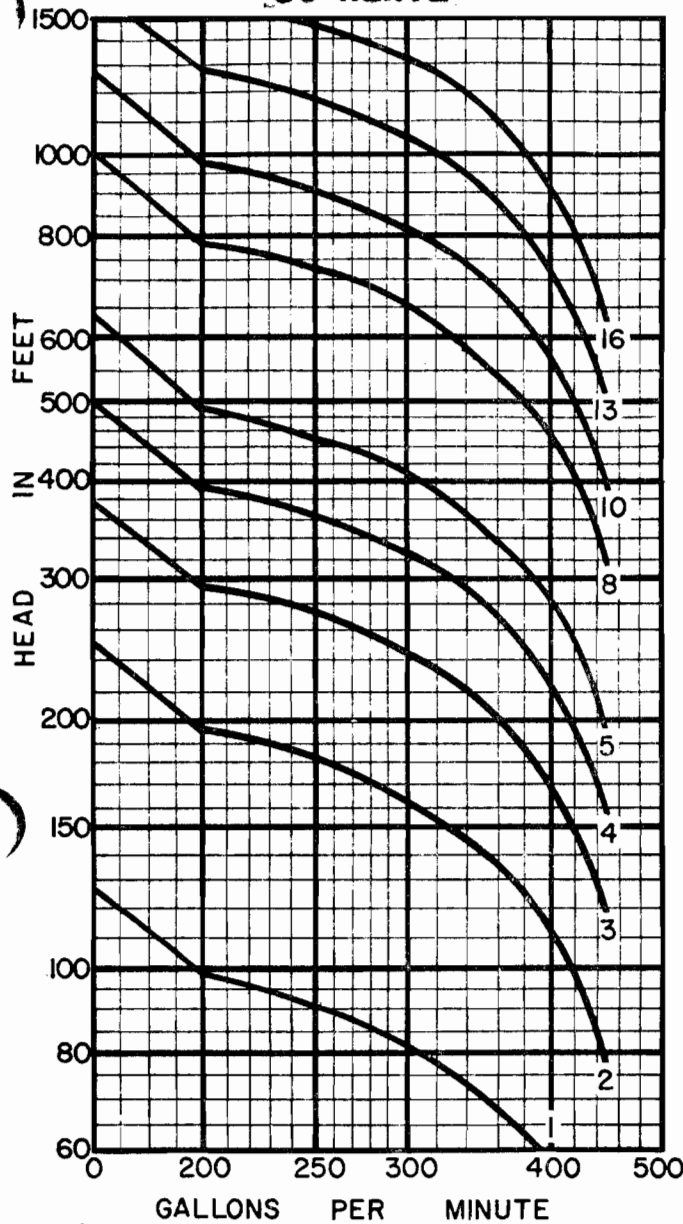

NO. STGS.	MODEL	HP	VOLT	F.L.A.
1	Z32512K	7½	230	40.0
	Z32532K		230	26.8
	Z32534K		460	13.4
2	Z32532M	15	230	46.6
	Z32534M		460	23.3
3	Z32532P	25	230	75.0
	Z32534P		460	37.5
4	Z32532R	30	230	92
	Z32534R		460	46
5	Z32534S	40	460	60
8	Z32534U	60	460	85.4
10	Z32534W	75	460	110
13	Z32534Y	100	460	148
16	Z32534YP	125	460	153

Service Factor 1.15

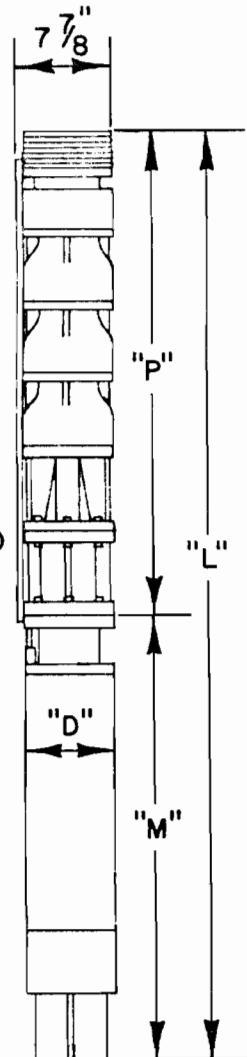

ENCLOSED IMPELLER

23263	2.6
IMP. DRG.	K
23273	3450
BOWL DRG.	R.P.M.
7 ¼	4.96
BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 6" N.P.T.

NO. STGS.	HP	D	M	P	L
1	7½	5.37	30.7	21.3	52
2	15		34.4	27	61.4
3	25		42.4	32.8	75.2
4	30	5.37	42.4	38.5	80.9
5	40		68.8	44.3	113.1
8	60		111	61.5	172.5
10	75	7.5	62.6*	73	135.6
13	100		50.1*	90.3	140.4
16	125		59	107.4	166.4

Dimensions in Inches
*8" Motors

WELL
SIZE

8"