


PIONEER

Z 600 SELECTION CURVES


PAGE: 400-021
DATE: 12-4-80
SUPERSEDES: 6-11-79

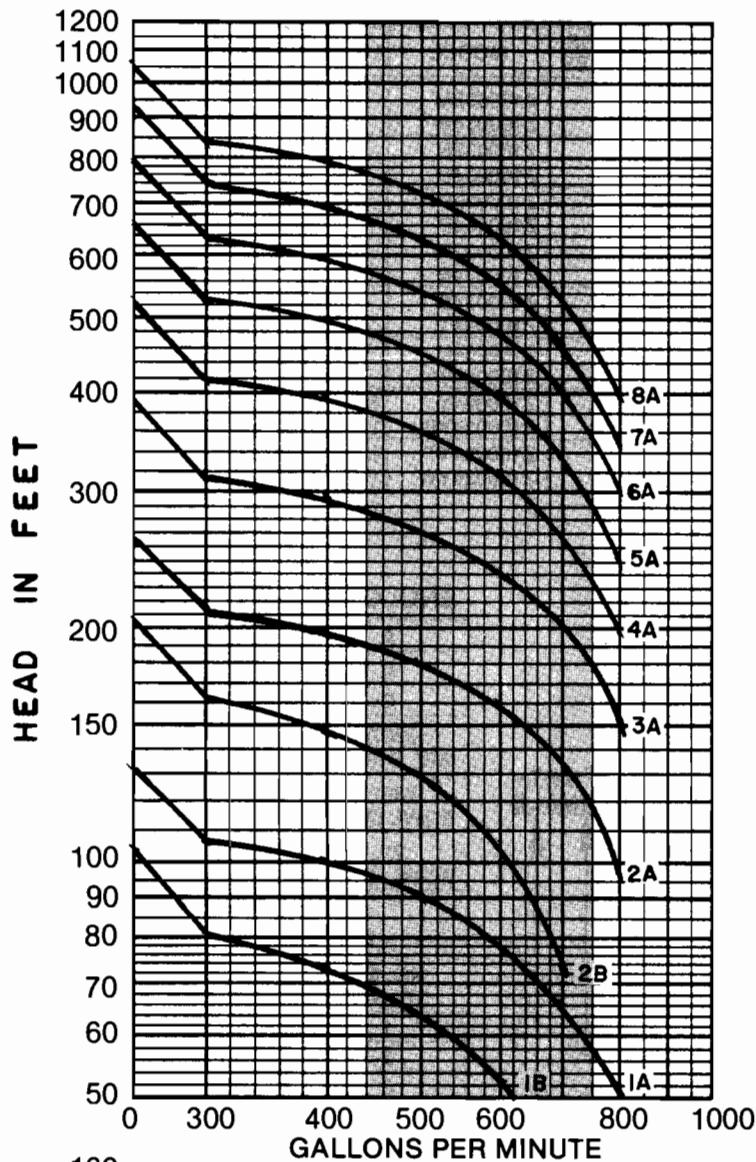

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1B	Z60032L	10	230	32.0
	Z60034L		460	16.0
1A	Z60032M	15	230	46.6
	Z60034M		460	23.3
2B	Z60032N	20	230	61.0
	Z60034N		460	30.5
2A	Z60032R	30	230	92.0
	Z60034R		460	46.0
3A	Z60034T	50	460	75.0
4A	Z60034U	60	460	85.4
5A	Z60034W	75	460	115.0
6A	Z60034Y	100	460	155.0
7A	Z60034YP	125	460	170.0
8A	Z60034YQ	125	460	170.0

ENCLOSED IMPELLER

A	6.3750
B	5.6875
23062 IMP. DRG.	3.9
23062 BOWL DRG.	3450 R.P.M.
7 ¹¹ / ₁₆ BOWL DIA.	9.4 EYE AREA
CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	- 4
2	- 3
3	- 2
4	- 1

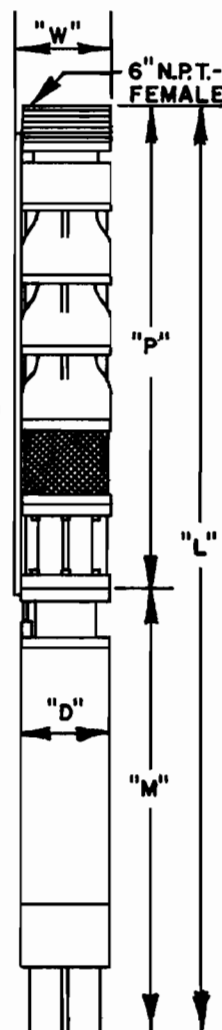

DIMENSIONS IN INCHES

NO. STGS.	HP	"D"	"M"	"P"	"L"	"W"
1B	10	5 ³ / ₈	30 ³ / ₄	21 ³ / ₈	52 ³ / ₈	8 ¹ / ₁₆
1A	15	5 ³ / ₈	34 ³ / ₈	21 ³ / ₈	56	8 ¹ / ₁₆
2B	20	5 ³ / ₈	38 ³ / ₈	27 ³ / ₄	66 ¹ / ₈	8 ¹ / ₁₆
2A	30	5 ³ / ₈	42 ³ / ₈	27 ³ / ₄	70 ¹ / ₈	8 ¹ / ₁₆
3A	50	5 ³ / ₈	76 ³ / ₄	33 ³ / ₈	110 ³ / ₈	8 ¹ / ₁₆
	50	7 ¹ / ₁₆	44 ¹ / ₈		78	8 ¹ / ₁₆
4A	60	7 ¹ / ₁₆	47 ¹ / ₈	40	87 ¹ / ₈	8 ¹ / ₁₆
5A	75	7 ¹ / ₁₆	52 ¹ / ₈	46 ¹ / ₈	98 ¹ / ₄	8 ¹ / ₁₆
6A	100	7 ¹ / ₁₆	60 ¹ / ₈	52 ¹ / ₄	112 ³ / ₈	8 ¹ / ₁₆
7A	125	8 ¹ / ₈	70	58 ³ / ₈	128 ³ / ₈	8 ¹ / ₁₆
8A	125	8 ¹ / ₈	70	64 ¹ / ₂	134 ¹ / ₂	8 ¹ / ₁₆

