


SUPERSEDES
136-63,63C

NOVEMBER 1984

136-25

MODEL 4RB PUMP
SPEED - 1800 RPM
CLOSED IMPELLER
60 HERTZ

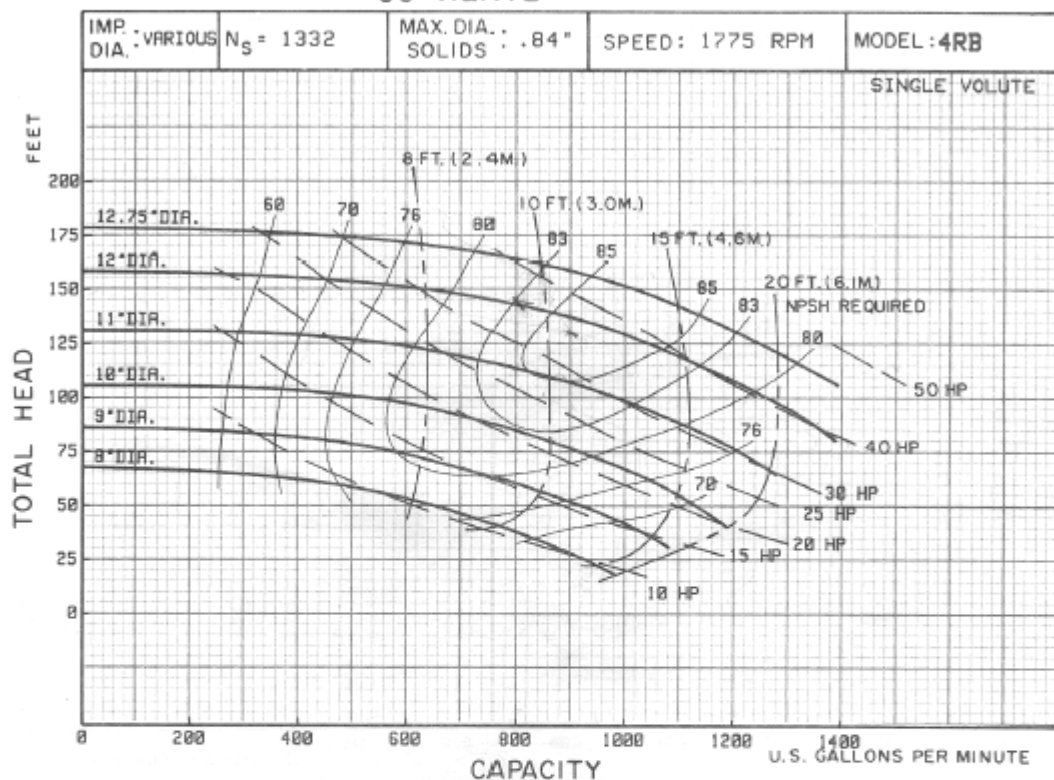

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER	
	FOR FULL MOTOR LOAD	FOR FULL MOTOR LOAD + 15% S.F.
50	A (12.75")	
40	B (12.00")	B+ (12.62")
30	C (11.00")	C+ (11.50")
25	D (10.50")	D+ (10.75")
20	E (9.75")	E+ (10.25")
15	F (8.94")	F+ (9.38")
10	G (8.00")	G+ (8.38")

Performances shown are for close-coupled electric configuration with packing.
Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON