

**SST — Submersible Turbine
NOMINAL MULTI-STAGE PER STAGE DATA**


MODEL 6B 120 (O)

3500 RPM

60 HZ

Minimum Well Size (inches) 6

TOTAL DYNAMIC HEAD — FEET

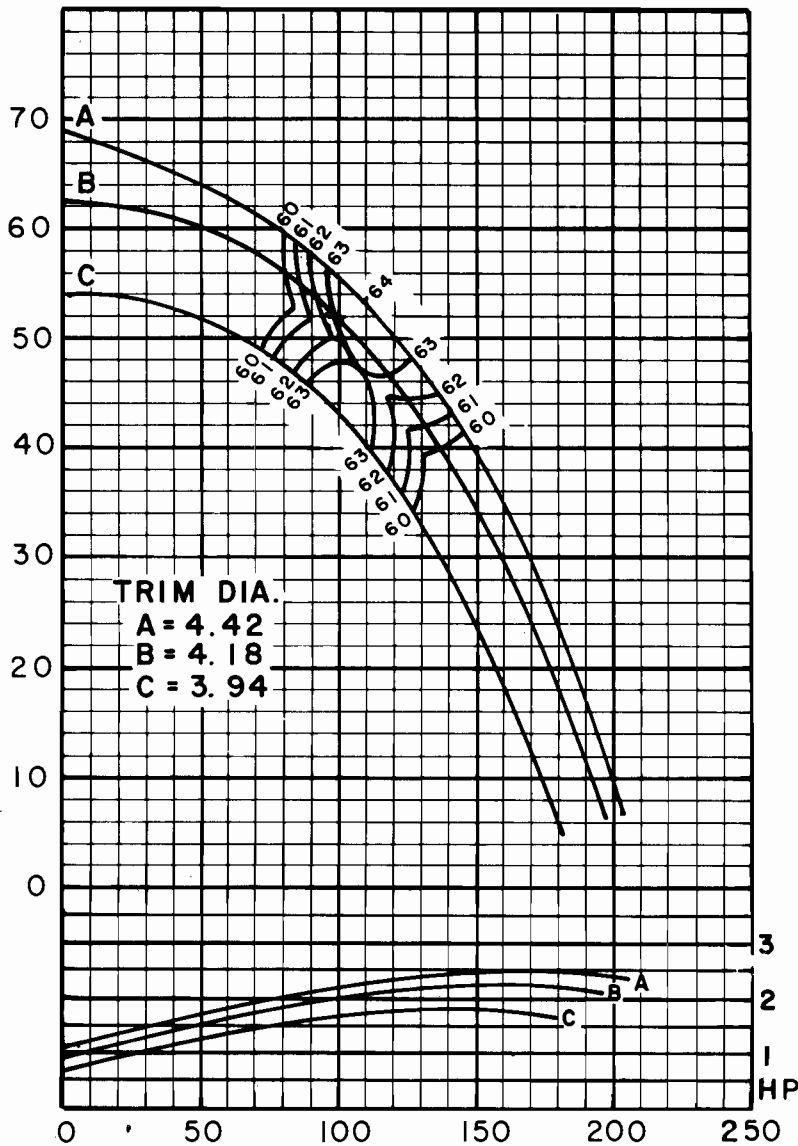


CAPACITY G.P.M.

No. Of Stages	Change Eff. %
1	(a)
3	-3
4	0
6	+1
8	+2
10	+3

(a) Consult Factory for Single Stage Data

Trim	Min. Reqd. H.P.
A	2.5
B	2.3
C	1.8

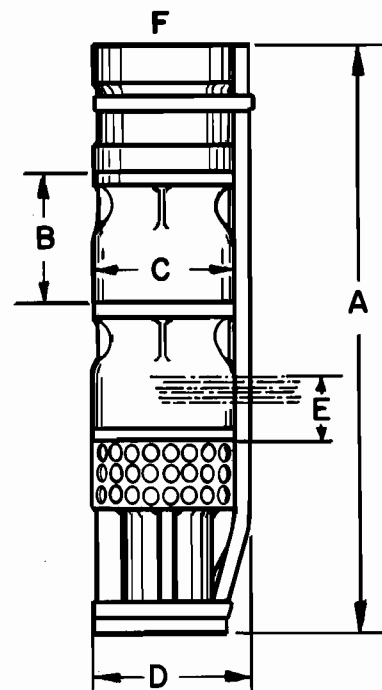

Note: Efficiencies Reflect Cast Iron Bowls
 Bowl Type: Threaded
 Impeller Type: Enclosed
 K Factor = 3.0

	4" Motor Mount	6" Motor Mount
A — One Stage Pump Length (in.)	18-13/16	17-9/16
B — Additional Stage Length (in.)	4-1/4	4-1/4
C — Max. Bowl Diameter (in.)	5-1/2	5-1/2
D — Max. Pump Diameter (in.)	6	6
E — Min. Submergence (in.)	18	18
F — Discharge Tap (in.) NPT	4	4
Shipping Weight (lbs.) Single Stage	57	52
Additional Weight Per Stage	17-1/2	17-1/2



**RED JACKET®
PUMPS**

A Marley Pump Company

P.O. Box 3888 Davenport Iowa 52808