


SST — Submersible Turbine NOMINAL MULTI-STAGE PER STAGE DATA

MODEL 6B 270(S)

3500 RPM

60 HZ


Minimum Well Size (inches) 6
(8" Motor Mount available — CONSULT FACTORY)

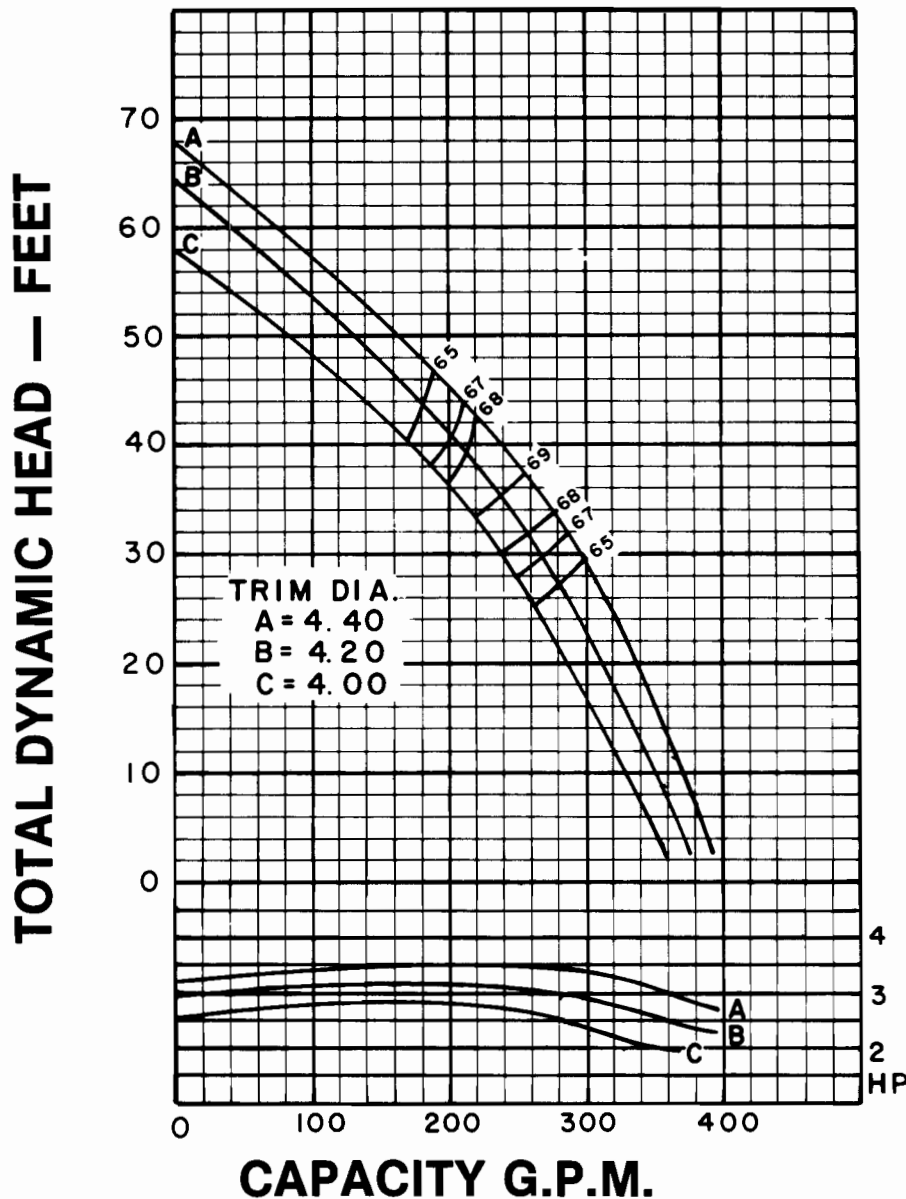

No. Of Stages	Change Eff. %
1	(a)
3	-3
5	-2
7	-1
9	0

(a) Consult Factory for Single Stage Data

Trim	Min. Req'd. H.P.
A	3.5
B	3.1
C	2.8

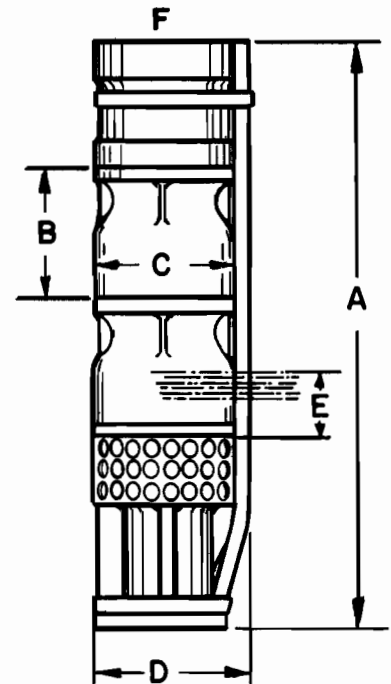

Note: Efficiencies Reflect Cast Iron Bowls Bowl Type: Threaded Impeller Type: Enclosed K Factor = 3.2		
A — One Stage Pump Length (in.)	4" Motor Mount 19-13/16	6" Motor Mount 18-9/16
B — Additional Stage Length (in.)	5-1/4	5-1/4
C — Max. Bowl Diameter (in.)	5-1/2	5-1/2
D — Max. Pump Diameter (in.)	6	6
E — Min. Submergence (in.)	18	18
F — Discharge Tap (in.) NPT	4	4
Shipping Weight (lbs.) Single Stage	54	49
Additional Weight Per Stage	14	14

**RED JACKET®
PUMPS**

A Marley Pump Company

P.O. Box 3888 Davenport Iowa 52808