

**SST — Submersible Turbine
NOMINAL MULTI-STAGE PER STAGE DATA**


MODEL 6B 330 (T)

3500 RPM

60 HZ

Minimum Well Size (inches) 6
(8" Motor Mount available — **CONSULT FACTORY**)


TOTAL DYNAMIC HEAD — FEET

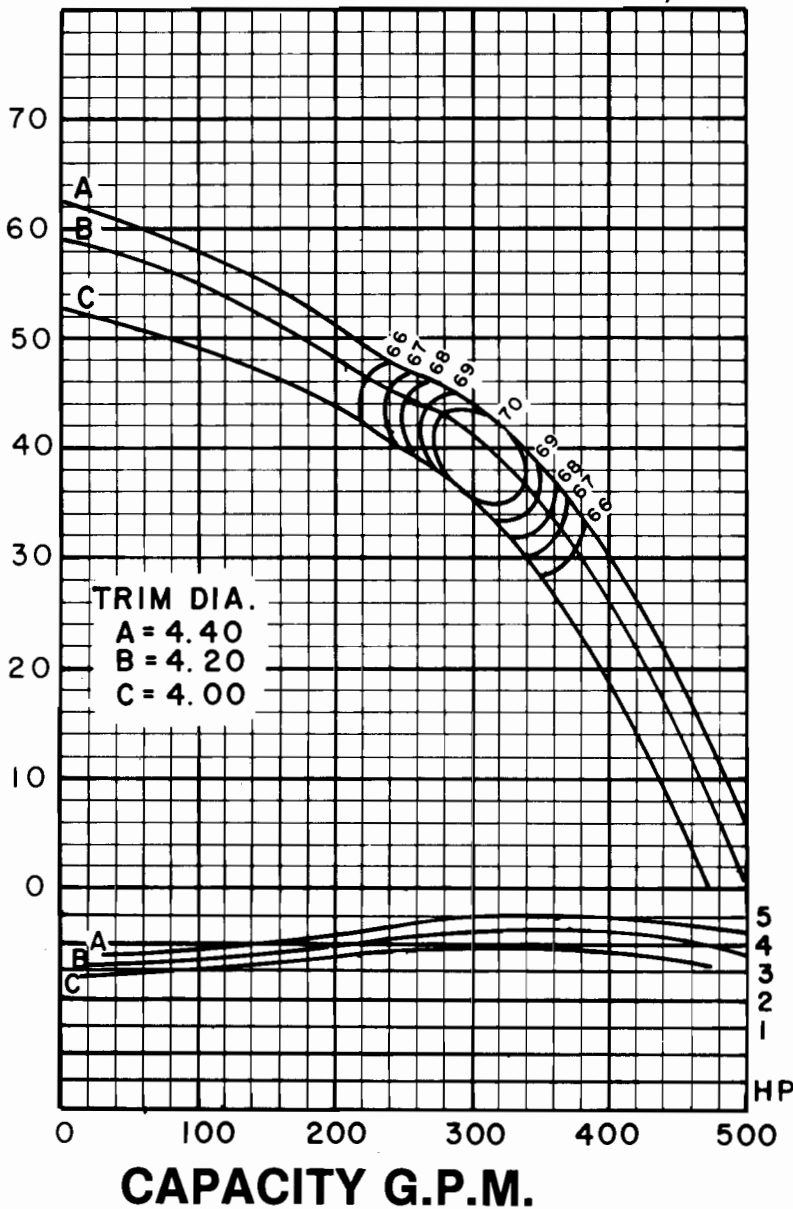

No. Of Stages	Change Eff. %
1	(a)
3	-3
5	-2
7	-1
9	0


(a) Consult Factory for Single Stage Data

Trim	Min. Req'd. H.P.
A	4.9
B	4.4
C	3.8

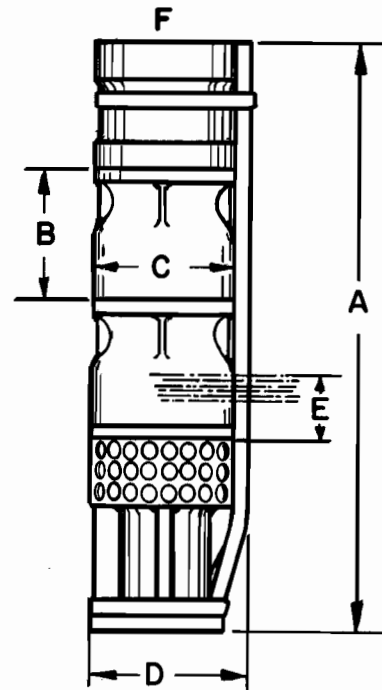

Note: Efficiencies Reflect Cast Iron Bowls
Bowl Type: Threaded
Impeller Type: Enclosed
K Factor = 3.2

	4" Motor Mount	6" Motor Mount
A — One Stage Pump Length (in.)	19-13/16	18-9/16
B — Additional Stage Length (in.)	5-1/4	5-1/4
C — Max. Bowl Diameter (in.)	5-1/2	5-1/2
D — Max. Pump Diameter (in.)	6	6
E — Min. Submergence (in.)	18	18
F — Discharge Tap (in.) NPT	4	4
Shipping Weight (lbs.) Single Stage	54	49
Additional Weight Per Stage	14	14



**RED JACKET®
PUMPS**

A Marley Pump Company

P O Box 3888 Davenport Iowa 52808