


**SST — Submersible Turbine
NOMINAL MULTI-STAGE PER STAGE DATA**

MODEL 7B 520 (V)

3500 RPM

60 HZ


**Minimum Well Size (inches) 8" with NEMA Motors
(For Non-NEMA Motors — CONSULT FACTORY)**

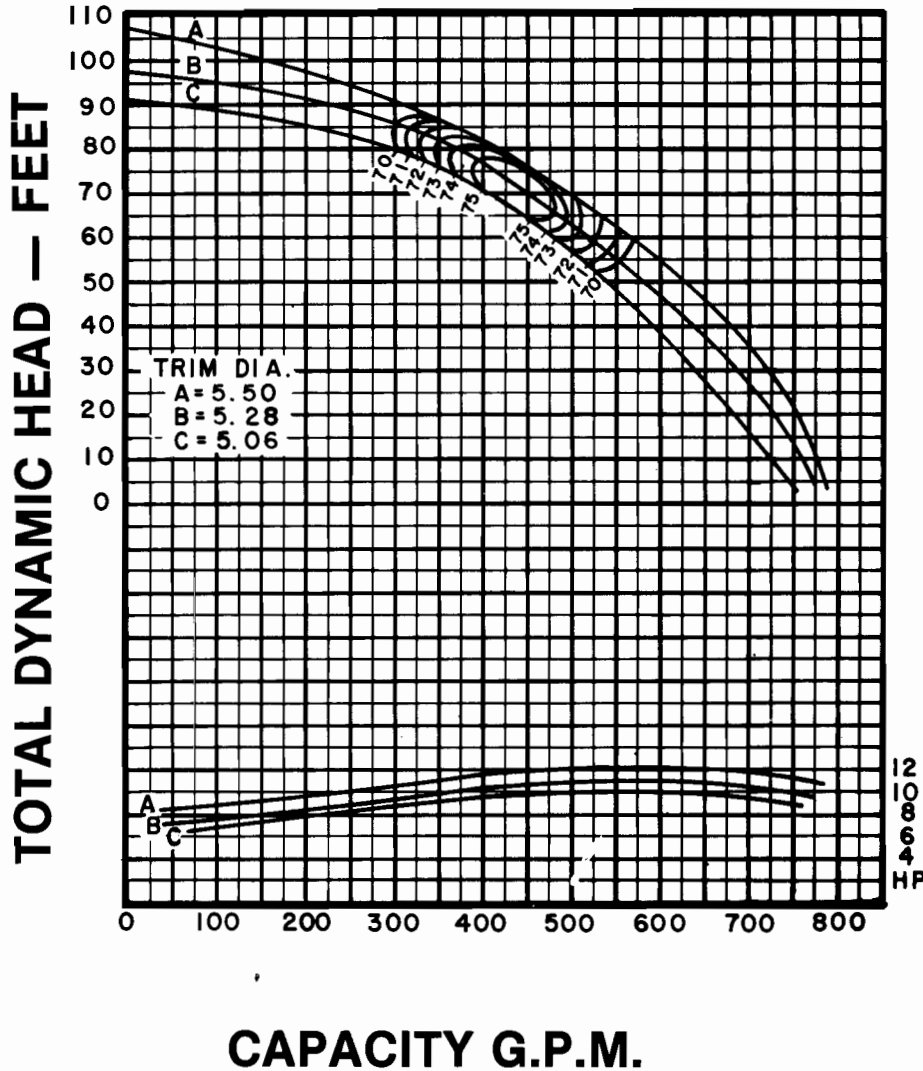


No. Of Stages	Change Eff. %
1	(a)
2	0
3	+ 2
4	+ 2.5
5	+ 3
6	+ 4

(a) Consult Factory for Single Stage Data

Trim	Min. Req'd. H.P.
A	12.2
B	10.8
C	10.0

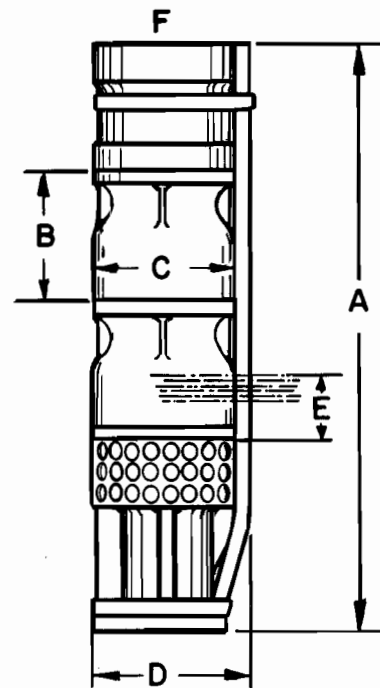

Note: Efficiencies Reflect Cast Iron Bowls Bowl Type: Threaded Impeller Type: Enclosed K Factor = 4.5		
	6" Motor Mount	8" Motor Mount
A — One Stage Pump Length (in.)	26-11/16	28-1/16
B — Additional Stage Length (in.)	6-1/4	6-1/4
C — Max. Bowl Diameter (in.)	7	7
D — Max. Pump Diameter (in.)	7-7/8	7-7/8
E — Min. Submergence (in.)	18	18
F — Discharge Tap (in.) NPT	6	6
Shipping Weight (lbs.) Single Stage	94	99
Additional Weight Per Stage	21	21


RED JACKET®
PUMPS

A Marley Pump Company

P.O. Box 3888 Davenport Iowa 52808