


SST — Submersible Turbine NOMINAL MULTI-STAGE PER STAGE DATA

MODEL 7B 620 (W)

3500 RPM

60 HZ


Minimum Well Size (inches) 8" with NEMA Motors
(For Non-NEMA Motors — CONSULT FACTORY)

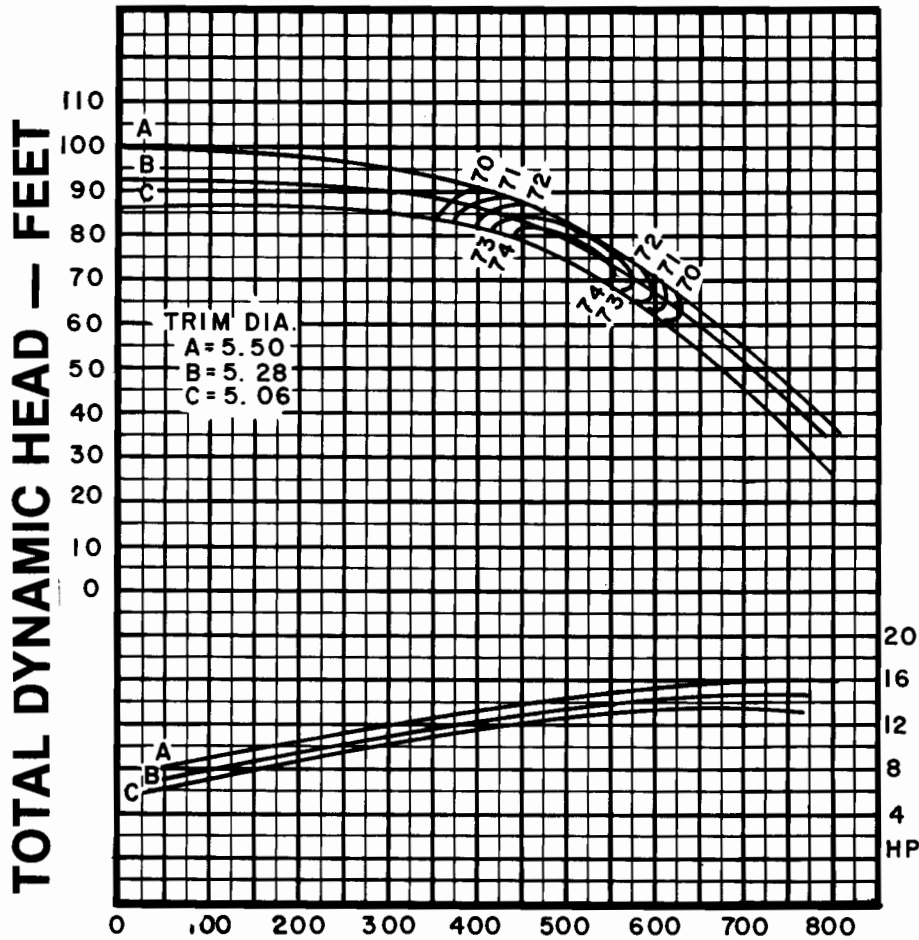

No. Of Stages	Change Eff. %
1	(a)
2	0
3	+1.5
4	+3
5	+4
6	+5


(a) Consult Factory for Single Stage Data

Trim	Min. Req'd. H.P.
A	16.0
B	14.8
C	13.6

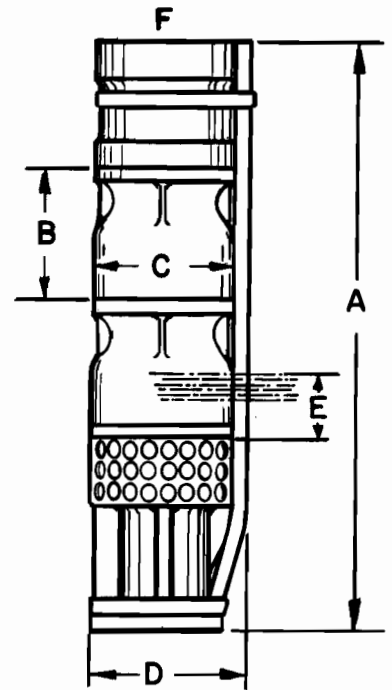

CAPACITY G.P.M.

Note: Efficiencies Reflect Cast Iron Bowls Bowl Type: Threaded Impeller Type: Enclosed K Factor = 4.5		
A — One Stage Pump Length (in.)	6" Motor Mount	8" Motor Mount
B — Additional Stage Length (in.)	26-11/16	28-1/16
C — Max. Bowl Diameter (in.)	6-1/4	6-1/4
D — Max. Pump Diameter (in.)	7	7
E — Min. Submergence (in.)	7-7/8	7-7/8
F — Discharge Tap (in.) NPT	18	18
Shipping Weight (lbs.) Single Stage	6	6
Additional Weight Per Stage	94	99
	21	21



**RED JACKET®
PUMPS**

A Marley Pump Company

P.O. Box 3888 Davenport Iowa 52808