




1160 RPM
SINGLE STAGE PERFORMANCE

☐ STAGES REQUIRED

STANDARD CONSTRUCTION

See reverse side for detailed information.

**MODEL 12HCCM
ENCLOSED IMPELLER
STANDARD CONSTRUCTION**

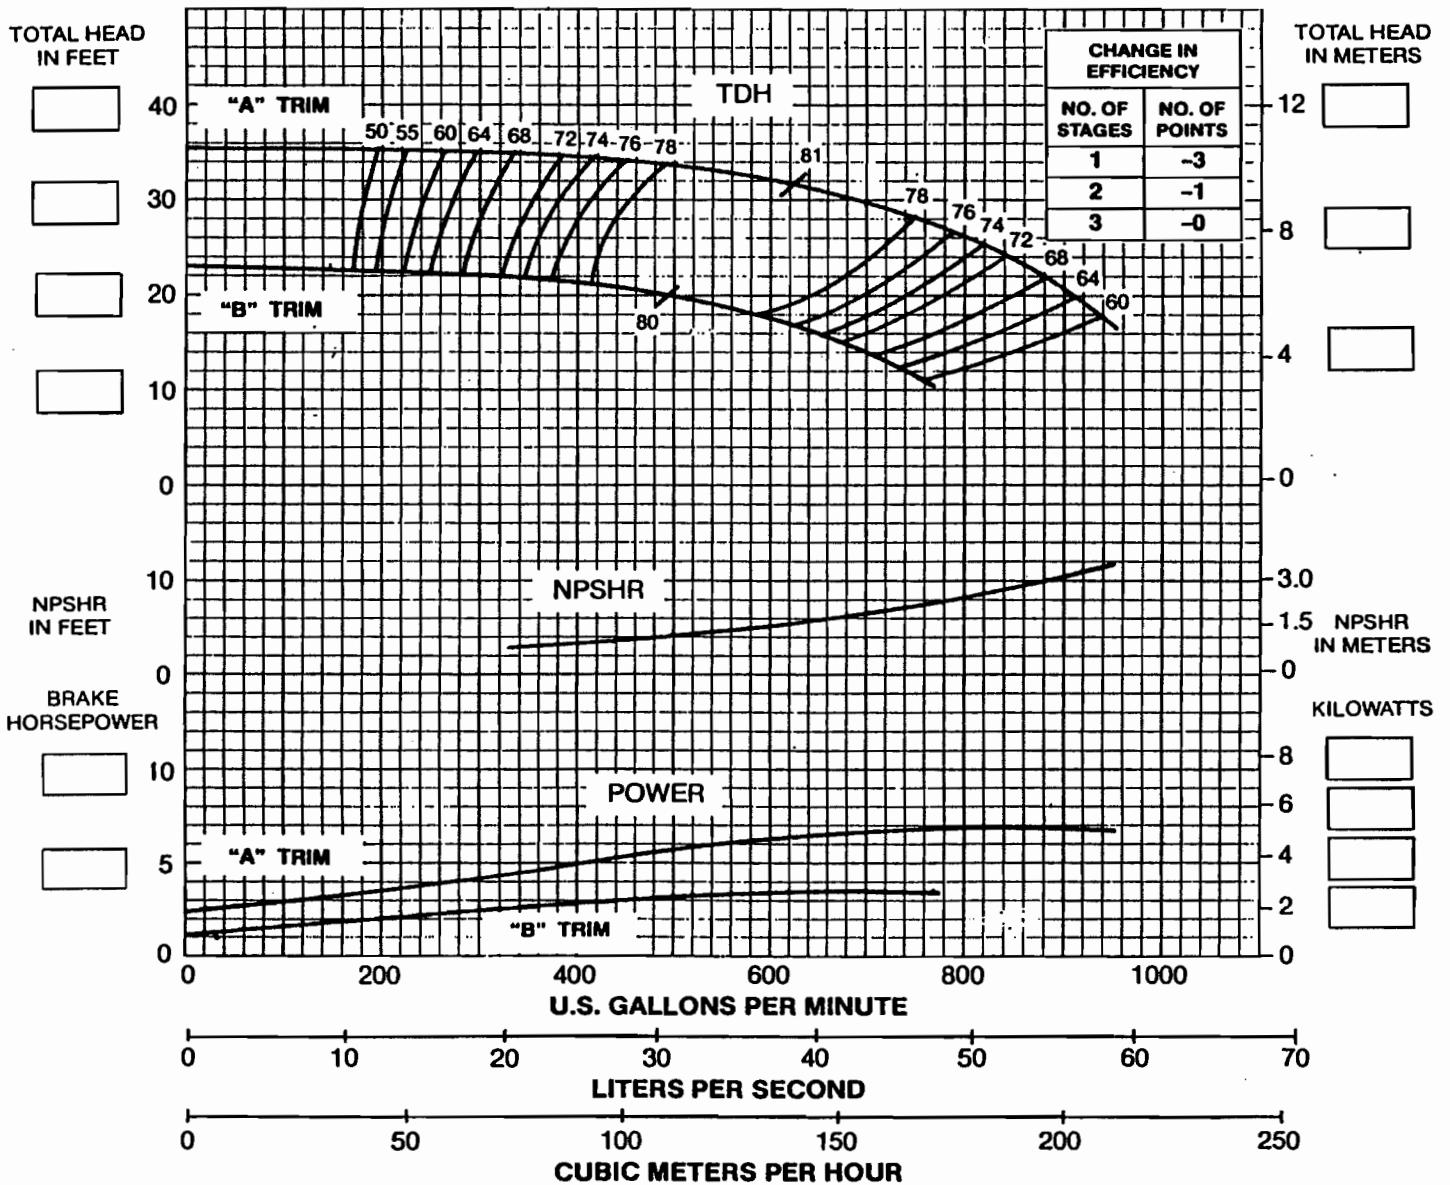

Pump hydraulic performance is based on handling cold clear, fresh nonaerated water, free of foreign materials.

Customer: _____
Item No.: _____
Capacity: _____ TDH _____ Bowl HP _____ Bowl Efficiency _____

12 HCCM
1160

PERIPHERAL VELOCITY 6.38 ft. / sec. / inch, .077 m / sec. / mm of impeller dia. Ns 2162

WEIGHT: SINGLE STAGE 322 lbs., 146.18 Kgs. ADDITIONAL STAGE 118 lbs., 53.6 Kgs.