




**3500 RPM
SINGLE STAGE PERFORMANCE**

MODEL 6CCH

STANDARD CONSTRUCTION

See reverse side for detailed information.

☐ STAGES REQUIRED

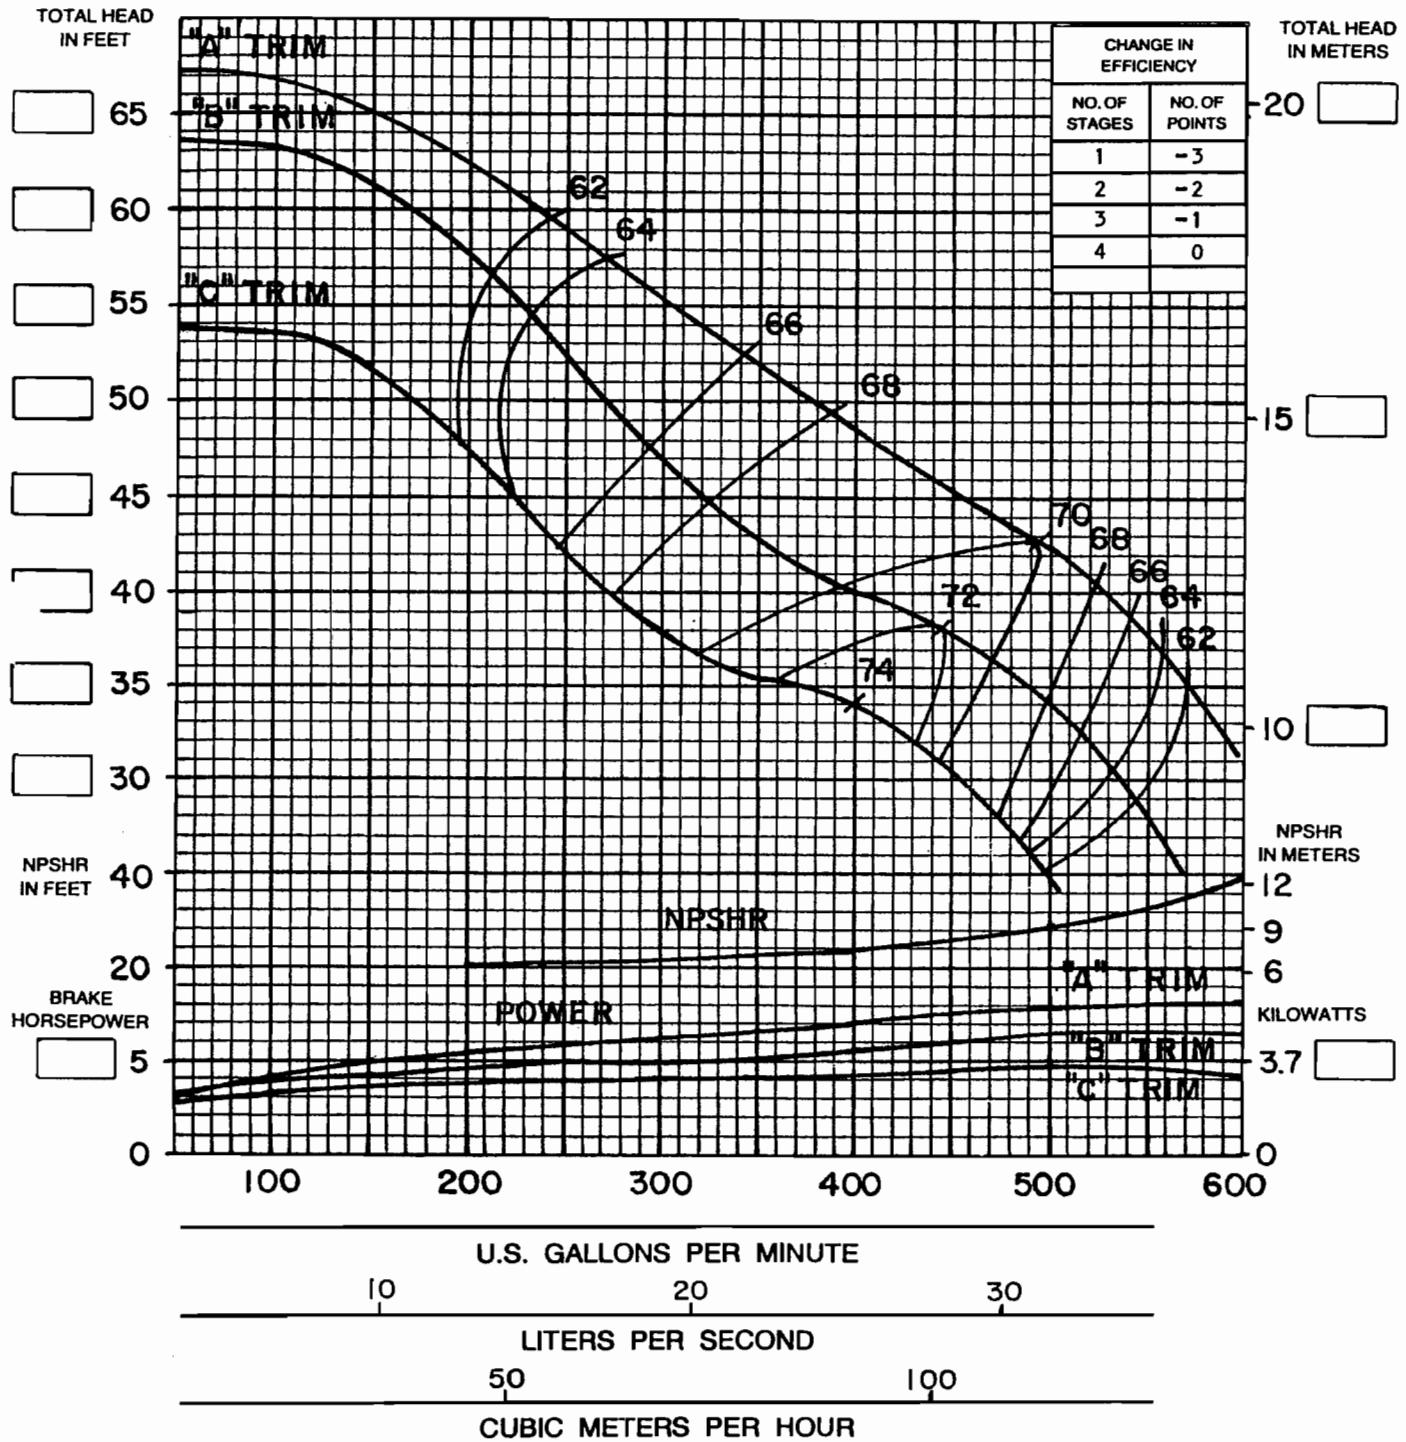

Pump hydraulic performance is based on handling cold clear, fresh nonaerated water, free of foreign materials.

Customer: _____

Item No.: _____

Capacity: _____ TDH _____ Bowl HP _____ Bowl Efficiency _____



IMPELLER DATA

6CCH
3500

IMPELLER NO. 406-3-3009 . TYPE ENCLOSED . DIAMETER: A 4.62 ", 117.5 mm,
B 4.31 ", 109.5 mm, C 4.03 ", 102.4 mm.
EFFECTIVE EYE AREA 5.67 sq. inches, 144 sq. mm. NUMBER OF VANES 7 .
THRUST CONSTANT K 1.2 lbs. / ft. 17.5 N / m of head. WEIGHT 2.25 lbs., 1.02 Kg.
WR² .081 lbs. / ft²., .395 Kg / m².
EYE FLUID VELOCITY CK .057 ft. / sec. / GPM, .273 m / sec. / LPS.
PERIPHERAL VELOCITY 15.72 ft. / sec. / inch, .189 m / sec. / mm of impeller dia. Ns 1955



BOWL DATA

BOWL NO. 406-3-2004 . CONNECTION TYPE THREADED . NOMINAL DIAMETER (E) 5½ ", 139.7 mm.
MINIMUM DIAMETER (E) 5⁷/₁₆ ", 138.1 mm.
COLUMN PIPE SIZE 4 ", 101.6 mm, STANDARD, 4 ", 101.6 mm, MAXIMUM
SUCTION PIPE SIZE 4 ", 101.6 mm, STANDARD, 4 ", 101.6 mm, MAXIMUM.
PUMP SHAFT DIAMETER 1.0 ", 54.4 mm, STANDARD 1¼ ", 31.8 mm MAXIMUM.
LATERAL 15¹⁵/₃₂ ", 11.9 STANDARD, _____ ", mm _____ mm MAXIMUM.
SHAFT BEARING CLEARANCE .010 ", .254 mm. IMPELLER SKIRT CLEARANCE .015 ", .381 mm.
MAXIMUM NUMBER OF STAGES 20 (std. construction).
NAXIMUM HEAD 1155 ft., 352 m (std. construction). MAXIMUM SPHERE SIZE 1 ", 25.4 mm.
PROJECTIONS ABOVE COLUMN PIPE BUTT: **TUBE** 8", 203.2 mm; **SHAFT** 16", 406.4 mm. FOR
ENCLOSED LINESHAFT. 12", 304.8 mm. FOR OPEN LINESHAFT.

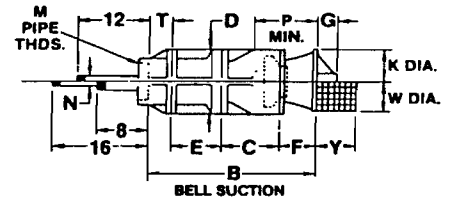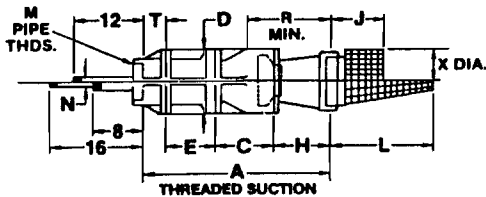

STANDARD DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	W	X	Y
IN.	16½	14¼	4½	5½	6¾	3	3¼	5¼	7	5¾	12¾	4	1	8	10½	3½	6¼	8	5¼
MM.	419.1	361.9	114.3	139.7	171.5	76.2	82.6	133.4	177.8	146.1	323.9	101.6	25.4	203.2	266.7	88.9	158.8	203.2	133.4

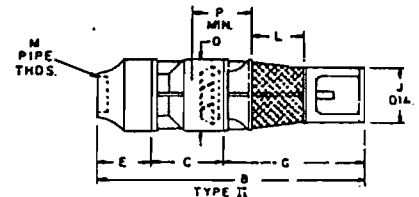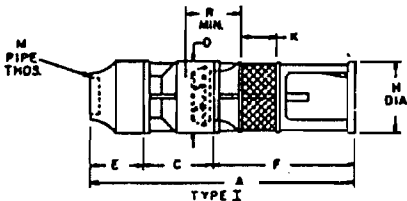

STANDARD DIMENSIONS

	A*	B	C	D	E	F	G	H**	J	K	L	M	P	R
IN.	17 ¹³ / ₁₆	18 ¹⁵ / ₁₆	4 ⁹ / ₁₆	5 ¹⁵ / ₁₆	3½	9.88	11	5.38	3.75	3	3	3	9	9
MM.	452.4	481.1	114.3	150.81	88.9	250.9	279.4	138.7	95.3	76.2	76.2	76.2	228.6	228.6

*8" MOTOR ADD 2.5 IN., 63.5 mm LENGTH, **O.D. 7.50 IN., 190.5 mm

WEIGHT: SINGLE STAGE 58 lbs., 26.3 Kgs. ADDITIONAL STAGE 17½ lbs., 7.9 Kgs.