




Section 7
Page 34
Curve No. 092434
Effective December 1990
Supersedes

870 RPM
SINGLE STAGE PERFORMANCE

MODEL 24BCL
STANDARD CONSTRUCTION

See reverse side for detailed information.

STAGES REQUIRED

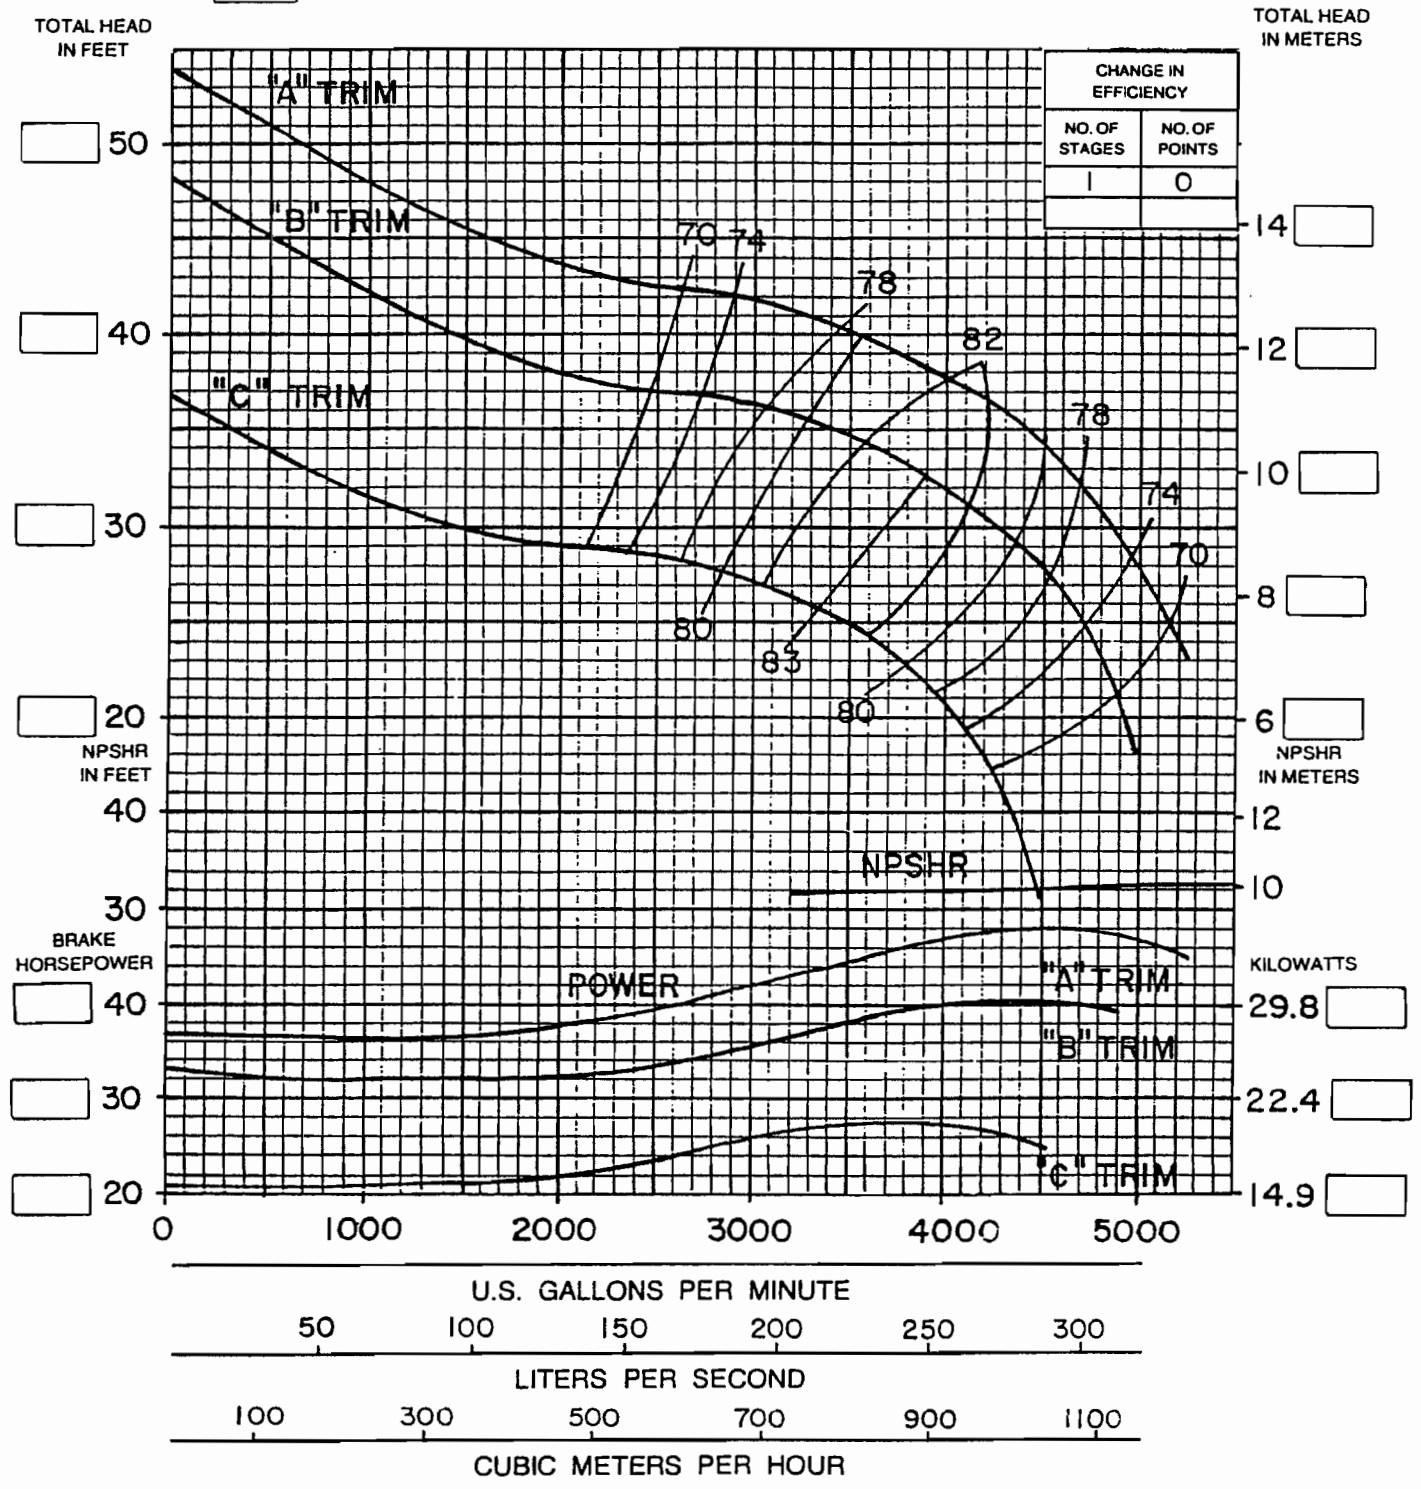

Pump hydraulic performance is based on handling cold clear, fresh nonaerated water, free of foreign materials.

Customer: _____
Item No.: _____

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	W	X	Y
IN.	53 ¹ / ₄	53 ⁵ / ₁₆	23 ¹ / ₄	21 ³ / ₄	19	11	7 ⁷ / ₈	N/A	N/A	24	N/A	16	23 ³ / ₁₆	15 ³ / ₈	N/A	1 ¹ / ₁₆	25 ¹ / ₄	N/A	12
MM	1352.6	1354.1	599.6	552.5	482.6	279.4	22.2	—	—	609.6	—	406.4	55.6	390.7	—	1.6	641.4	—	304.8