


SECTION 203
 PAGE 6
 DATE 12/1/97
 SUPERCEDES All Previous

SJ12C


1160 R.P.M.

SIMFLO
 PUMPS

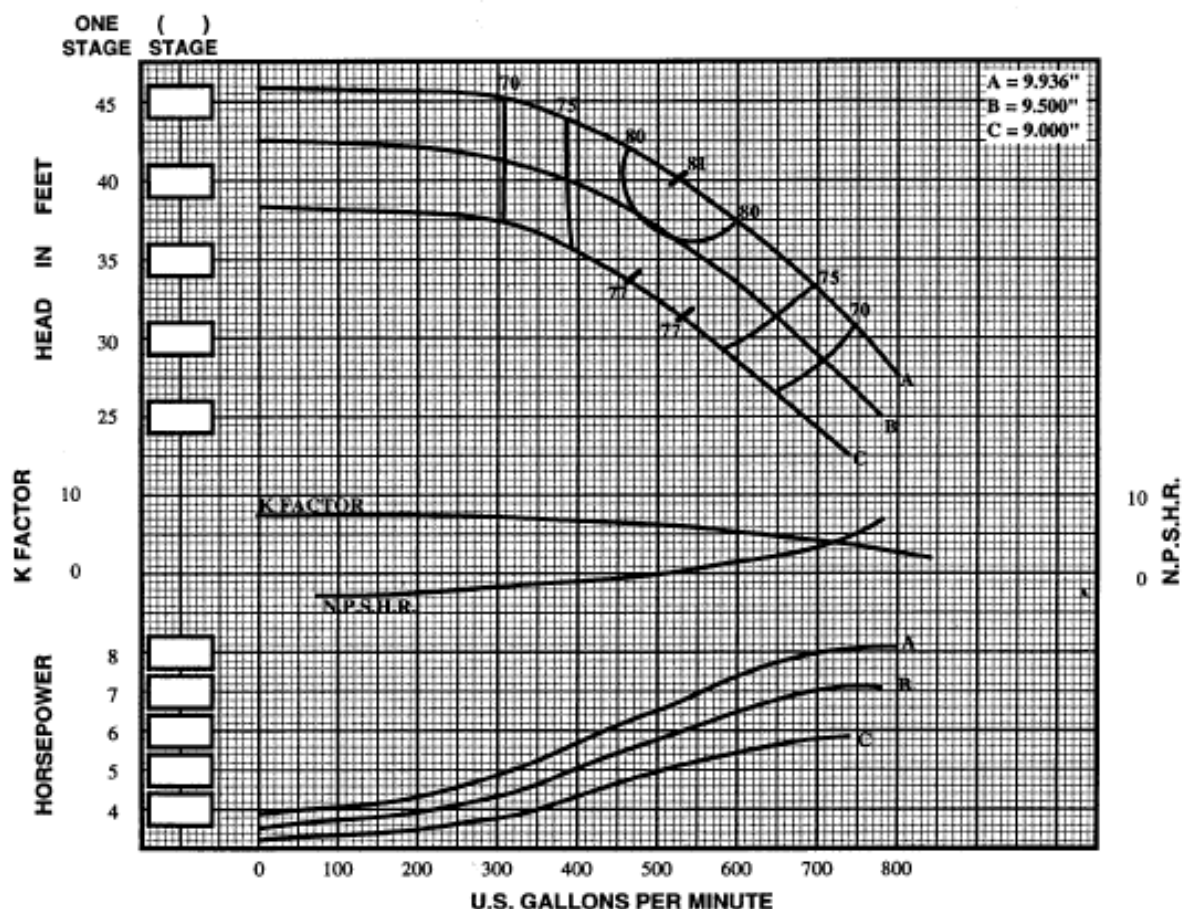


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.687"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SP12H	MAX. SHAFT DIA. = 1.687"	1	-3	IMP. - C.I.	-1
IMPELLER WT. - LBS. = 15.9	STD. LATERAL = .687"	2	-2	IMP. - NI-RI	-2
ONE STAGE WT. - LBS. = 260.0	DISCHARGE SIZES = 6", 8"	3	-1	IMP. - S.S.	-2
ADD'L STAGE WT. - LBS. = 120.0	SUCTION SIZES = 8"	4	0	BOWL - BRZ.	-1
MAX. SPHERE SIZE = .750"	ONE STAGE WFP = .790	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE* = 16"				BOWL - S.S.	-2

Δ CONSULT FACTORY

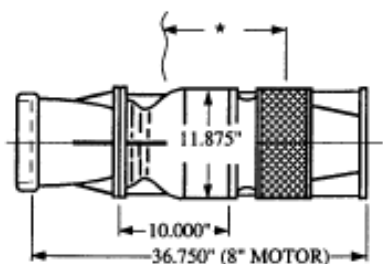

SIIRMFERSIRI F THIRIRINE

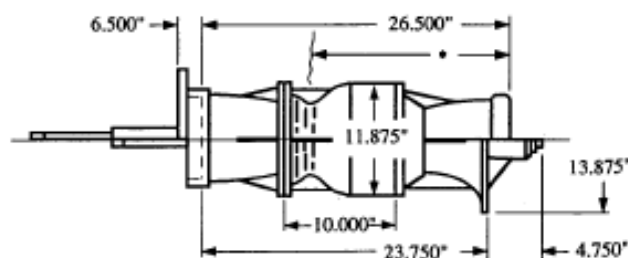

I INESHAFT THIRIRINE