



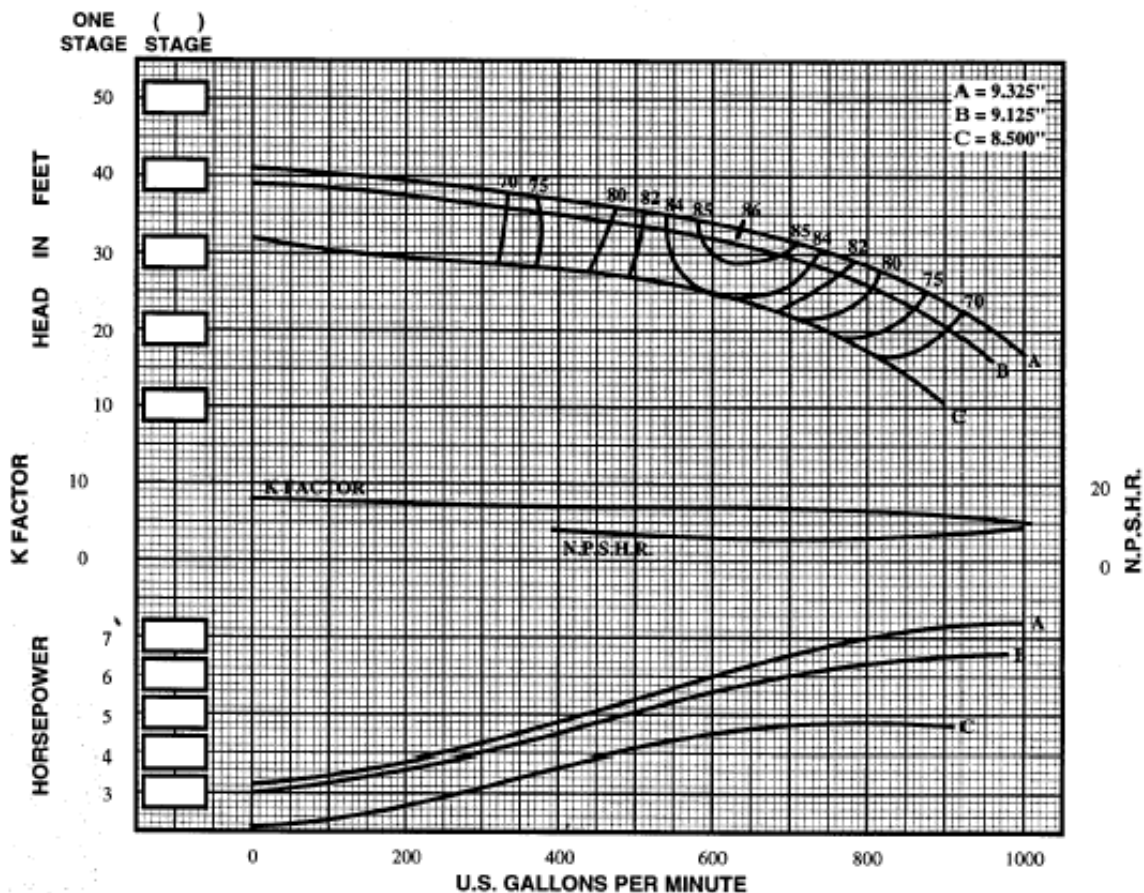


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.687"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SK12C	MAX. SHAFT DIA. = 1.937"	1	-3.5	IMP. - C.I.	-3
IMPELLER WT. - LBS. = 14.25	STD. LATERAL = .937"	2	-2	IMP. - NI-RI	-3
ONE STAGE WT. - LBS. = 250.0	DISCHARGE SIZES = 6", 8"	3	-1	IMP. - S.S.	Not Recom.
ADD'L STAGE WT. - LBS. = 107.0	SUCTION SIZES = 8"	4	0	BOWL - BRZ.	-2
MAX. SPHERE SIZE = .875"	ONE STAGE WR ² = .673	5	0	BOWL - NI-RI	-2
MIN. SUBMERGENCE* = 17"				BOWL - S.S.	-3

Δ CONSULT FACTORY

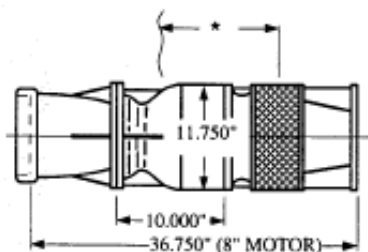

SUBMERSIBLE TURBINE

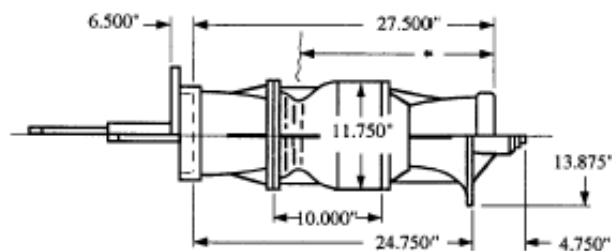

IN-SHAFT TURBINE