


SECTION 203
PAGE 22
DATE 7/1/99
SUPERCEDES All Previous

SR16C


1160 R.P.M.

SIMFLO
PUMPS

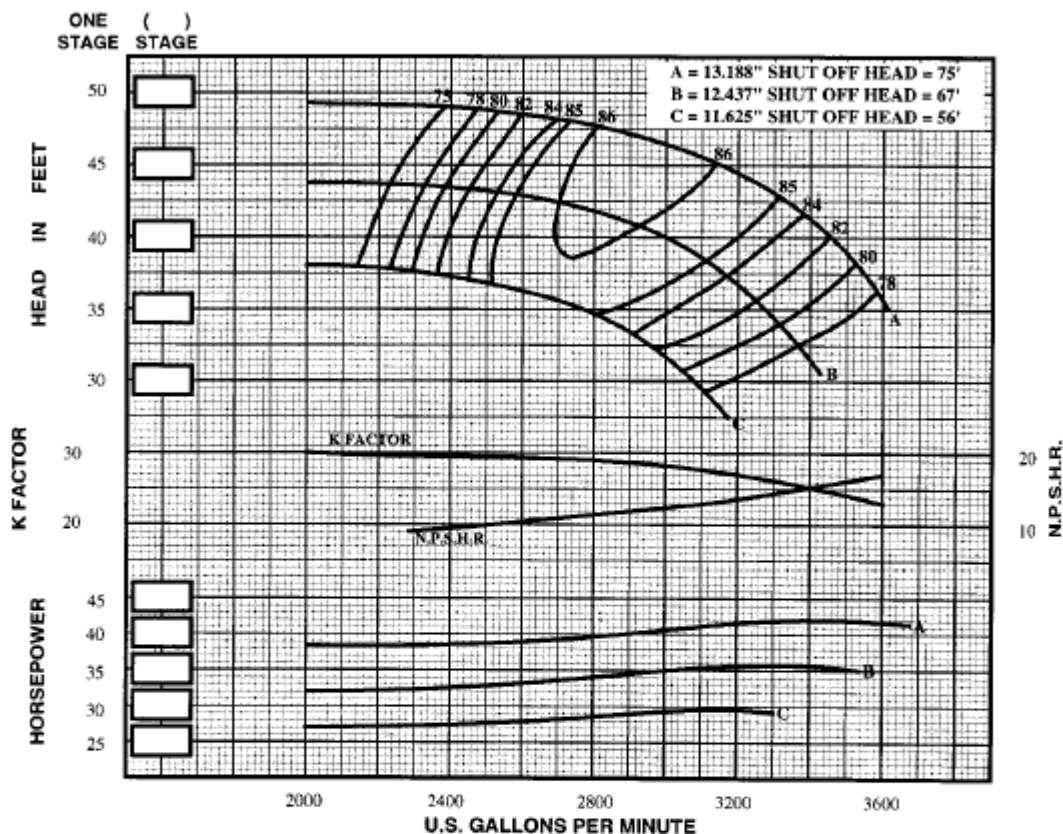


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SR16C	MAX. SHAFT DIA.	= 2.250"	1	-3	IMP. - C.I.	-3
IMPELLER WT. - LBS.	= 35.5	STD. LATERAL	= .750"	2	-2	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 600.0	DISCHARGE SIZES	= 12", 14"	3	-1	IMP. - S.S.	-1
ADD'L STAGE WT. - LBS.	= 250.0	SUCTION SIZES	= 12", BELL	4	0	BOWL - BRZ.	-2
MAX. SPHERE SIZE	= 1.375"	ONE STAGE WR ²	= 4.677	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE*	= 39"					BOWL - S.S.	-2

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

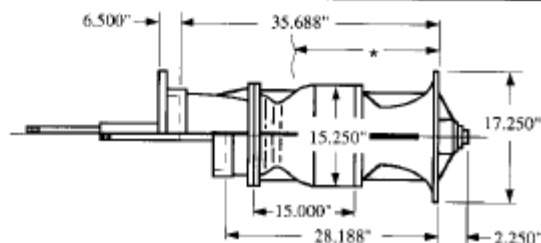

LINESHAFT TURBINE