





SF8C

1770 R.P.M.


SECTION 202
PAGE 13
DATE 7/1/99
SUPERCEDES All Previous

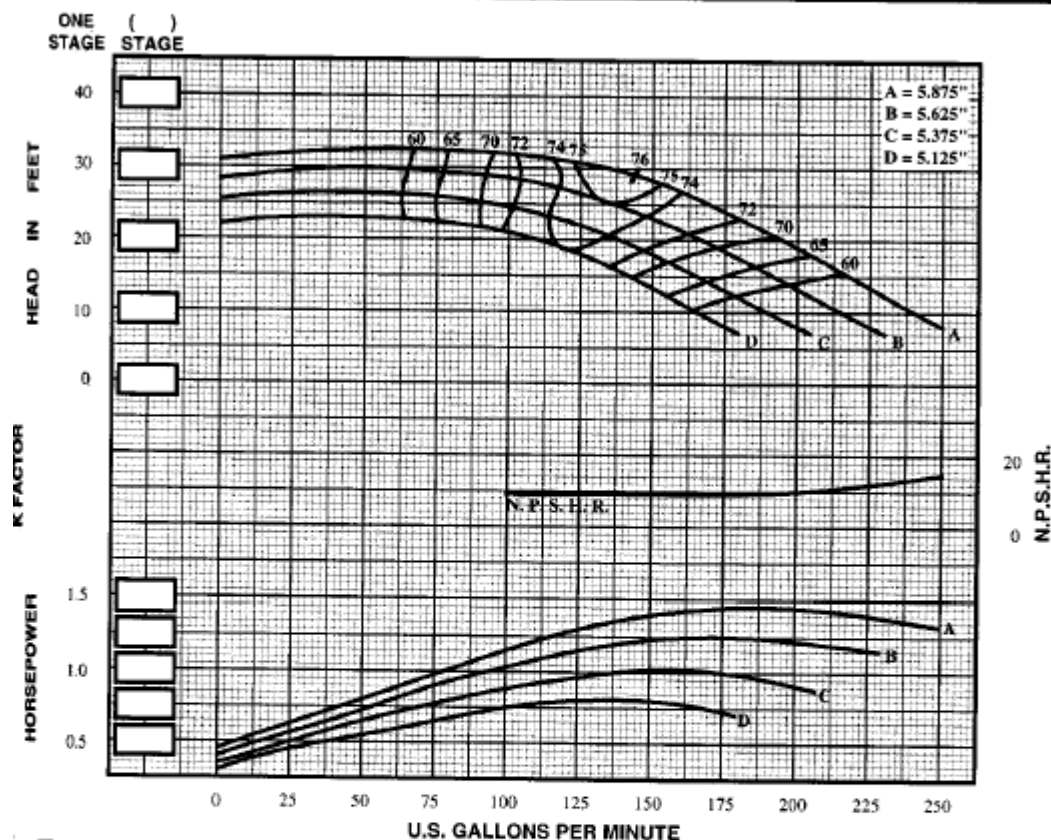

IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.250"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SS8L	MAX. SHAFT DIA. = 1.250"				
IMPELLER WT. - LBS. = 5.4	STD. LATERAL = .625"	1	-4	IMP. - C.I.	Δ
ONE STAGE WT. - LBS. = 122.0	DISCHARGE SIZES = 4", 5"	2	-3	IMP. - NI-RI	Δ
ADD'L STAGE WT. - LBS. = 40.0	SUCTION SIZES = 3"	3	-2	IMP. - S.S.	Δ
MAX. SPHERE SIZE = .313"	ONE STAGE WR ² = .108	4	-1	BOWL - BRZ	Δ
MIN. SUBMERGENCE* = 11"	K-FACTOR, MAX. = 3.60	5	0	BOWL - NI-RI	Δ
Δ CONSULT FACTORY				BOWL - S.S.	Δ



SUBMERSIBLE TURBINE

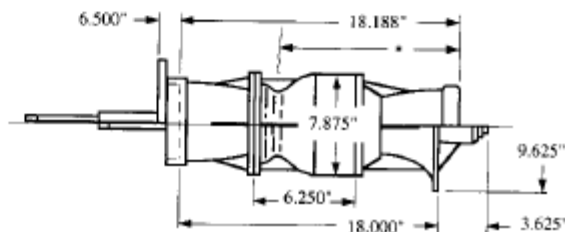

LINESHAFT TURBINE