



## SL12C

1770 R.P.M.

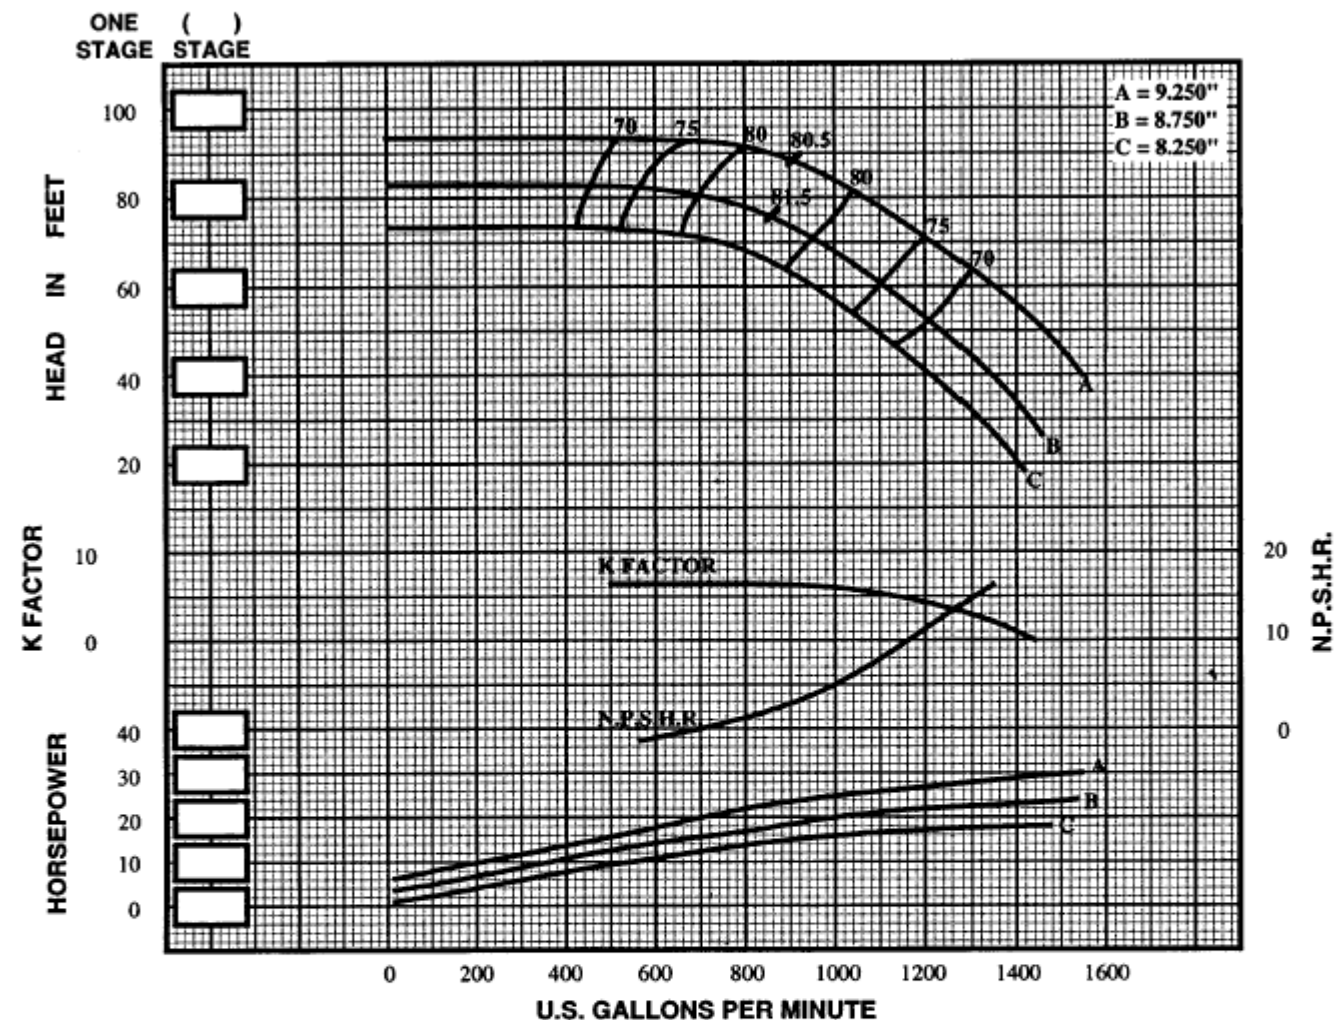


|                                |                                  |            |             |              |                    |
|--------------------------------|----------------------------------|------------|-------------|--------------|--------------------|
| IMPELLER TYPE = ENCLOSED       | STD. SHAFT DIA. = 1.687"         | NO. STAGES | EFF. CHANGE | MATERIAL     | B.E.P. EFF. CHANGE |
| IMPELLER NO. = S1100           | MAX. SHAFT DIA. = 1.687"         | 1          | -3          | IMP. - C.I.  | -1                 |
| IMPELLER WT. - LBS. = 15.2     | STD. LATERAL = .937"             | 2          | -2          | IMP. - NI-RI | -2                 |
| ONE STAGE WT. - LBS. = 260.0   | DISCHARGE SIZES = 6", 8"         | 3          | -1          | IMP. - S.S.  | -2                 |
| ADD'L STAGE WT. - LBS. = 122.0 | SUCTION SIZES = 8"               | 4          | 0           | BOWL - BRZ.  | -1                 |
| MAX. SPHERE SIZE = .625"       | ONE STAGE WP <sup>2</sup> = .744 | 5          | 0           | BOWL - NI-RI | -1                 |
| MIN. SUBMERGENCE* = 16"        |                                  |            |             | BOWL - S.S.  | -2                 |

Δ CONSULT FACTORY

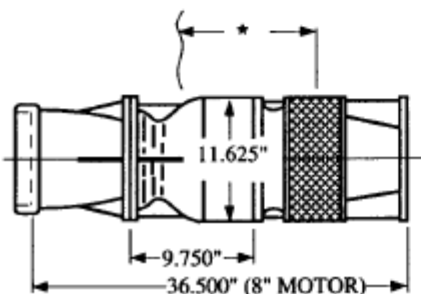

SUBMERSIBLE TURBINE

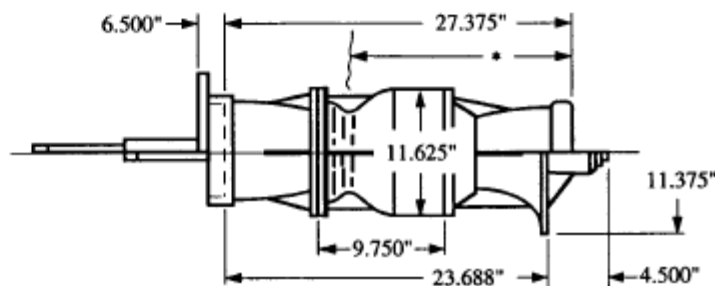

LINESHAFT TURBINE