




SL7C


1770 R.P.M.

SECTION 202
PAGE 11
DATE 7/1/99
SUPERCEDES All Previous

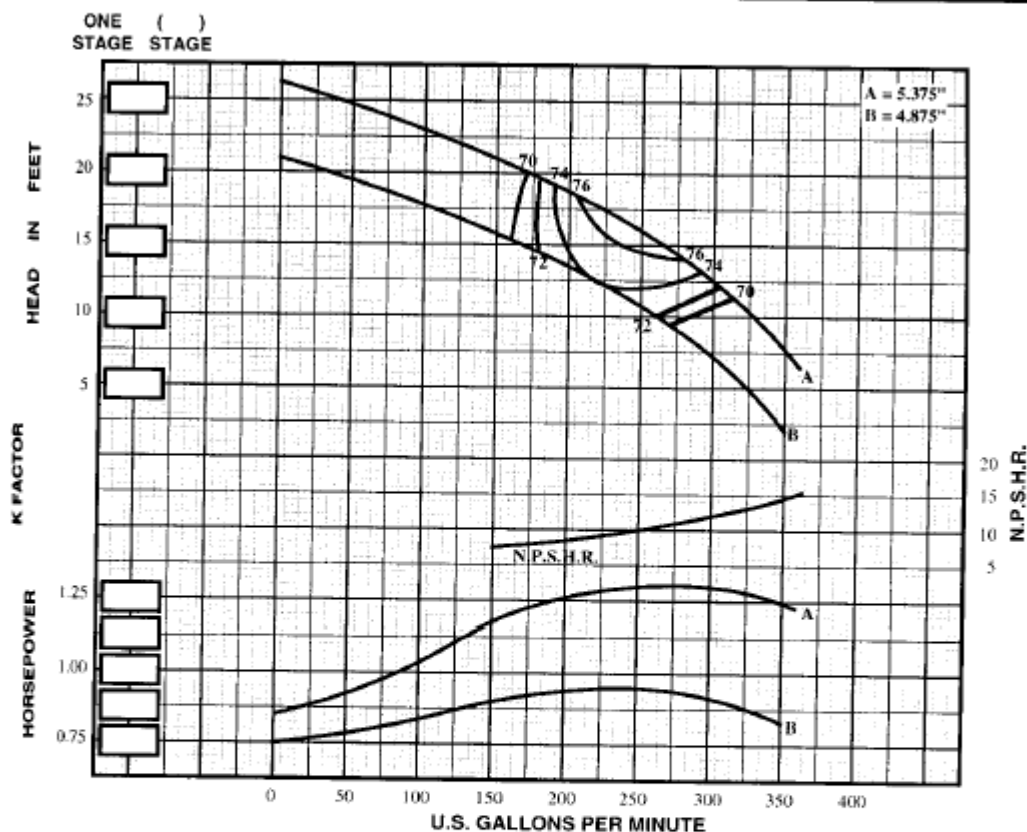

IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.000"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SF7M	MAX. SHAFT DIA. = 1.000"				
IMPELLER WT. - LBS. = 2.90	STD. LATERAL = .188"	1	-3.5	IMP. - C.I.	Δ
ONE STAGE WT. - LBS. = 59	DISCHARGE SIZES = 5", 6"	2	-2.0	IMP. - NI-RI	Δ
ADD'L STAGE WT. - LBS. = 20	SUCTION SIZES = 6"	3	-1.0	IMP. - S.S.	Δ
MAX. SPHERE SIZE = .563	ONE STAGE WR ² = .046	4	-0.5	BOWL - BRZ.	Δ
MIN. SUBMERGENCE* = 20'	K FACTOR = 4.29	5	0.0	BOWL - NI-RI	Δ
				BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE