




SL9C


1770 R.P.M.

SECTION 202
PAGE 25
DATE 12/1/97
SUPERCEDES All Previous

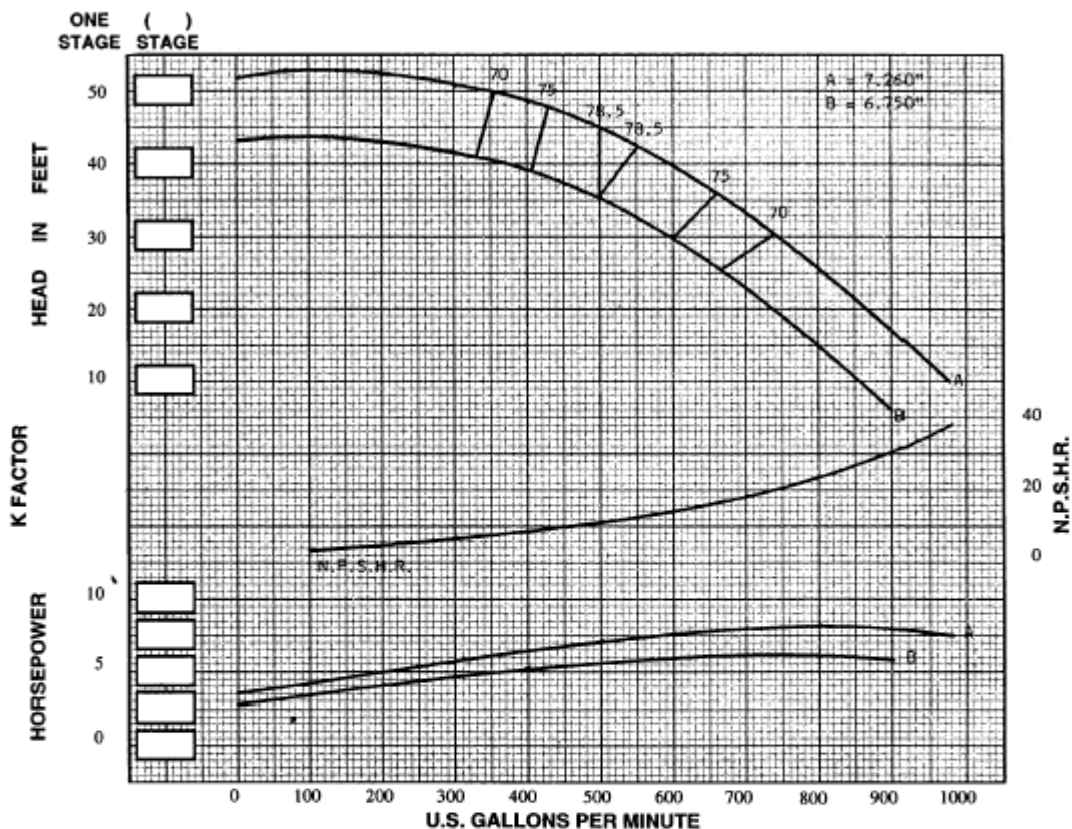


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= 1.500"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SL9H	MAX. SHAFT DIA.	= 1.500"	1	-3	IMP. - C.I.	Δ
IMPELLER WT. - LBS.	= 8.65	STD. LATERAL	= .937"	2	-2	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS.	= 135.0	DISCHARGE SIZES	= 6"	3	-1	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS.	= 53.0	SUCTION SIZES	= 6"	4	0	BOWL - BRZ	Δ
MAX. SPHERE SIZE	= .875"	ONE STAGE WHP	= .248	5	0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE*	= 15"	K-FACTOR, MAX.	= 5.7			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

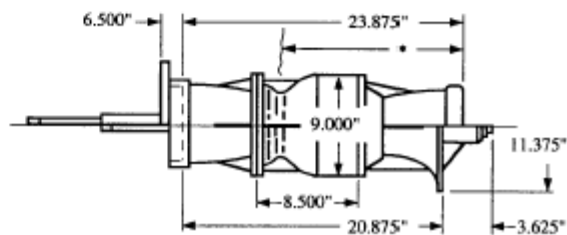

LINESHAFT TURBINE