


SECTION 202
PAGE 2
DATE 7/1/99
SUPERCEDES All Previous

SM4C


1770 R.P.M.

SIMFLO
PUMPS

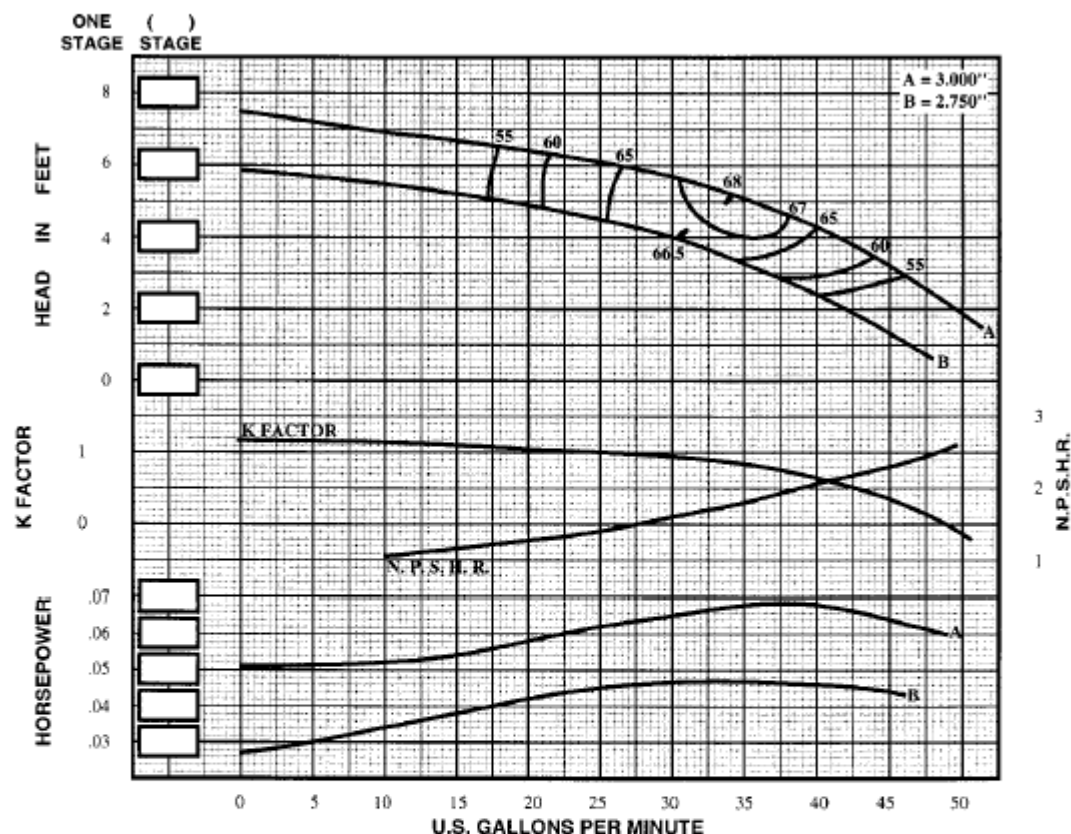


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= .875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SS4M	MAX. SHAFT DIA.	= .875"	1	-6.5	IMP. - C.I.	-5
IMPELLER WT. - LBS.	= 0.9	STD. LATERAL	= .160"	2	-5	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 20.0	DISCHARGE SIZES	= 2.50"	3	-3.5	IMP. - S.S.	NOT RECON.
ADD'L STAGE WT. - LBS.	= 5.8	SUCTION SIZES	= 3.00"	4	-2	BOWL - BRZ.	0
MAX. SPHERE SIZE	= .250"	ONE STAGE WP ²	= .005	5	-1	BOWL - NI-RI	-1
MIN. SUBMERGENCE*	= 6"					BOWL - S.S.	NOT RECON.

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

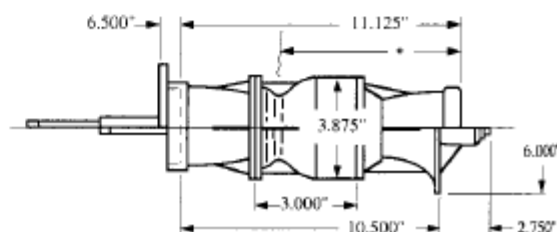

LINESHAFT TURBINE