




SP4C


1770 R.P.M.

SECTION 202
PAGE 3
DATE 7/1/99
SUPERCEDES All Previous

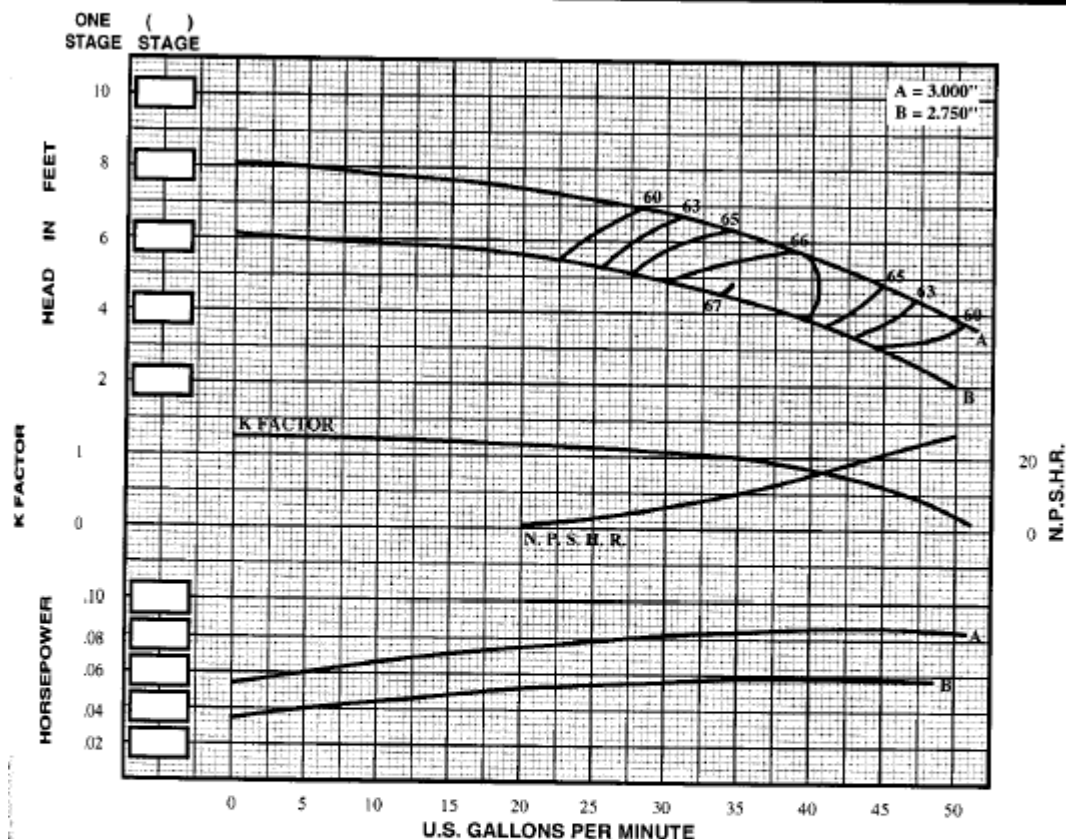


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= .875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SS4H	MAX. SHAFT DIA.	= .875"	1	-6.5	IMP. - C.I.	-5
IMPELLER WT. - LBS.	= 0.75	STD. LATERAL	= .160"	2	-5	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 20.0	DISCHARGE SIZES	= 2.50"	3	-3.5	IMP. - S.S.	NOT RECOM.
ADD'L STAGE WT. - LBS.	= 5.65	SUCTION SIZES	= 3.00"	4	-2	BOWL - BRZ.	0
MAX. SPHERE SIZE	= .250"	ONE STAGE WR ²	= .004	5	-1	BOWL - NI-RI	-1
MIN. SUBMERGENCE*	= 6"					BOWL - S.S.	NOT RECOM.

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

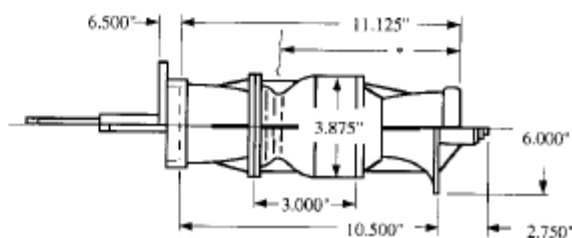

LINESHAFT TURBINE