


SECTION 202
PAGE 4
DATE 7/1/99
SUPERCEDES All Previous

SP4S


1770 R.P.M.

SIMFLO
PUMPS

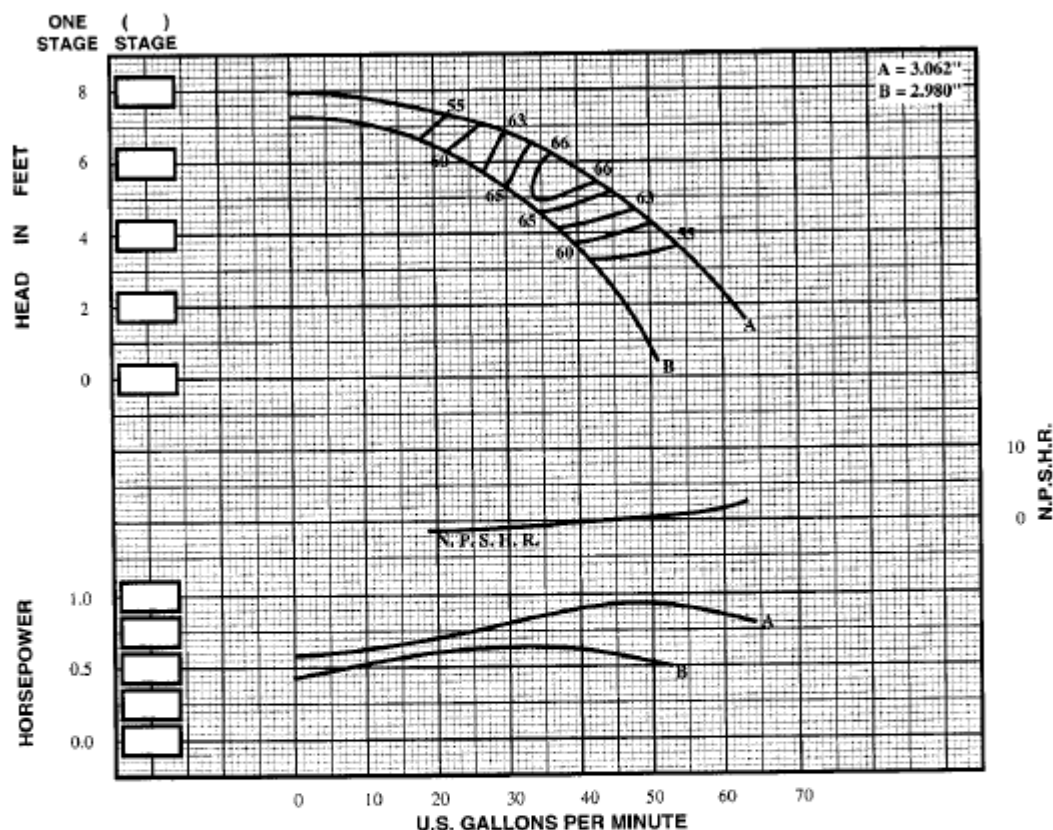


IMPELLER TYPE = SEMI-OPEN	STD. SHAFT DIA. = .875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SS4HO	MAX. SHAFT DIA. = .875"	1	-6.5	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 0.72	STD. LATERAL = .010"	2	-5.0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 20.0	DISCHARGE SIZES = 2.50"	3	-3.5	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 5.62	SUCTION SIZES = 2.50"	4	-2.0	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = .250"	ONE STAGE WR ² = .003	5	-1.0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 6"	K FACTOR = 1.50			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

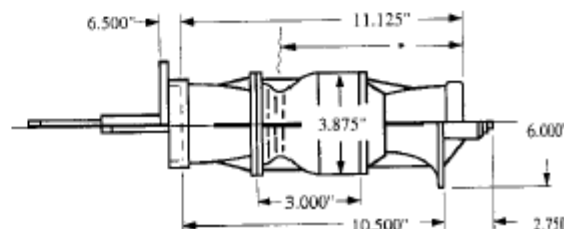

LINESHAFT TURBINE