


SECTION 202
PAGE 12
DATE 12/1/97
SUPERCEDES All Previous

SP7C


1770 R.P.M.

SIMFLO
PUMPS

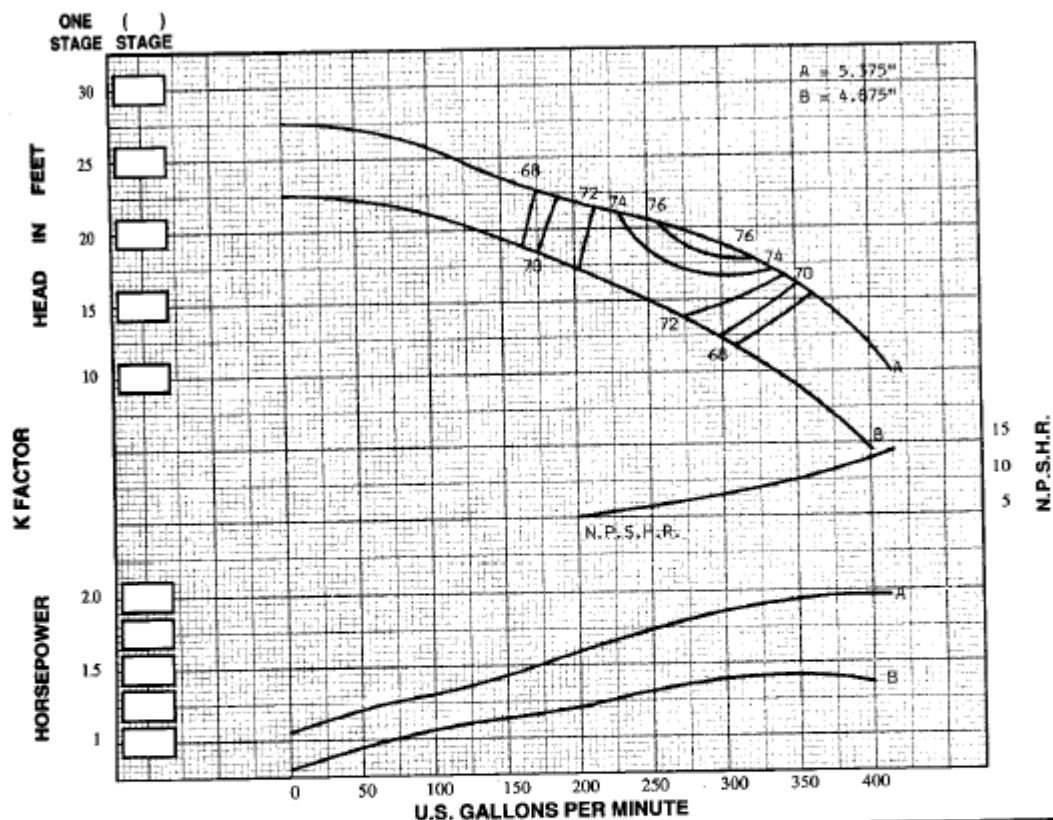

IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.000"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SF7H	MAX. SHAFT DIA. = 1.000"	1	-3.5	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 3.25	STD. LATERAL = .188"	2	-2.0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 60	DISCHARGE SIZES = 5", 6"	3	-1.0	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 21	SUCTION SIZES = 6"	4	-0.5	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = .563"	ONE STAGE W.P. = .050	5	0.0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 20"	K FACTOR = 4.27			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE