


SECTION 202
 PAGE 56
 DATE 7/1/99
 SUPERCEDES All Previous

SR16C


1770 R.P.M.

SIMFLO
 PUMPS

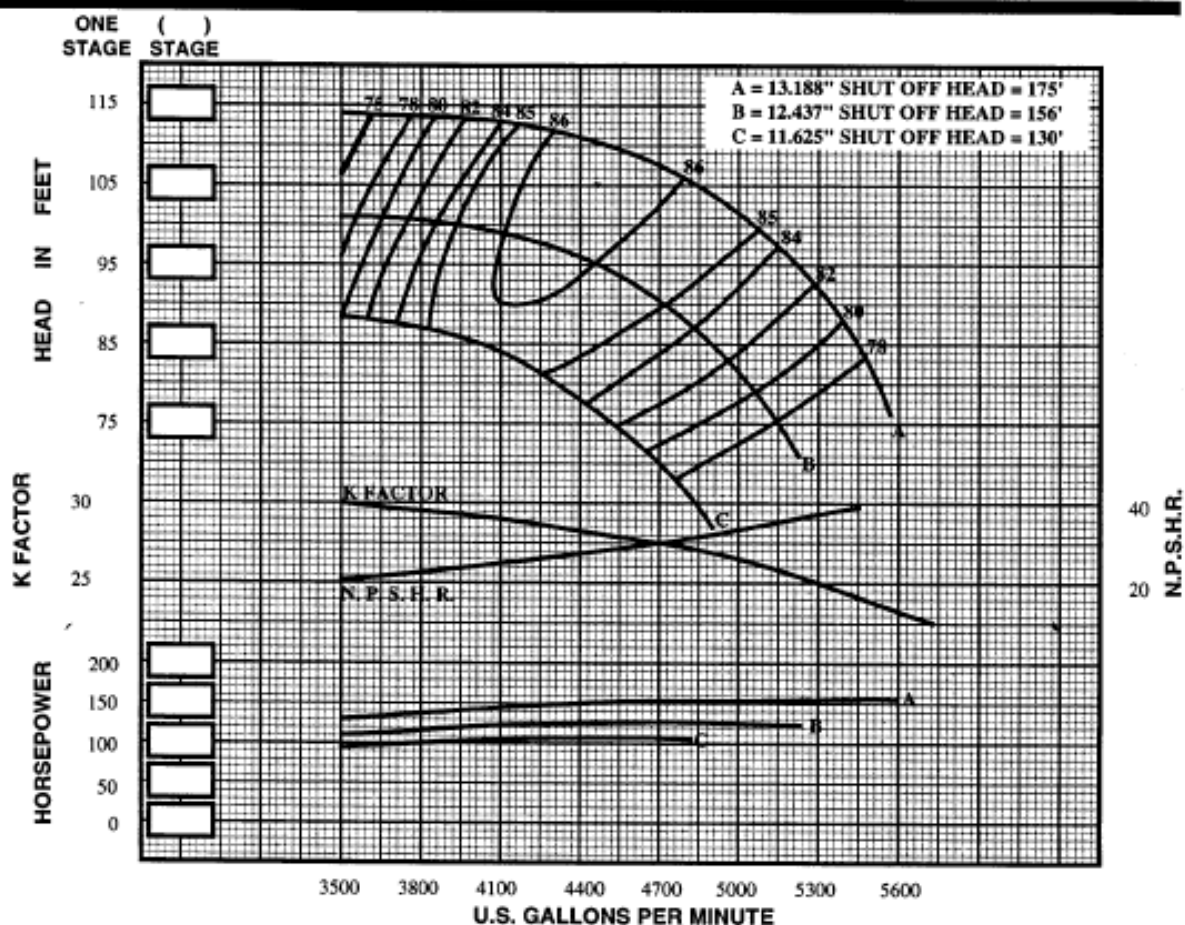


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SR16C	MAX. SHAFT DIA. = 2.250"				
IMPELLER WT. - LBS. = 35.5	STD. LATERAL = .750"	1	-3	IMP. - C.I.	-3
ONE STAGE WT. - LBS. = 600.0	DISCHARGE SIZES = 12", 14"	2	-2	IMP. - NI-RI	-2
ADD'L STAGE WT. - LBS. = 250.0	SUCTION SIZES = 12", BELL	3	-1	IMP. - S.S.	-1
MAX. SPHERE SIZE = 1.375"	ONE STAGE WP ² = 4.677	4	0	BOWL - BRZ.	-2
MIN. SUBMERGENCE* = 39"		5	0	BOWL - NI-RI	-1
				BOWL - S.S.	-2

Δ CONSULT FACTORY

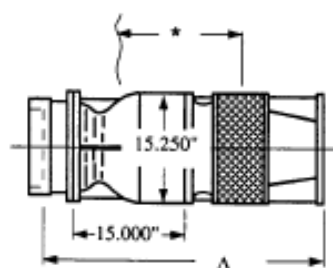

SUBMERSIBLE TURBINE

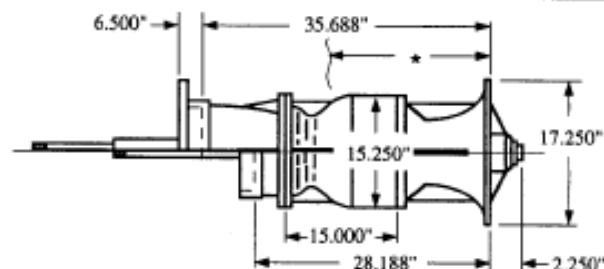

LINESHAFT TURBINE