


SECTION 202
PAGE 18
DATE 12/1/97
SUPERCEDES All Previous

SR8C


1770 R.P.M.

SIMFLO
PUMPS

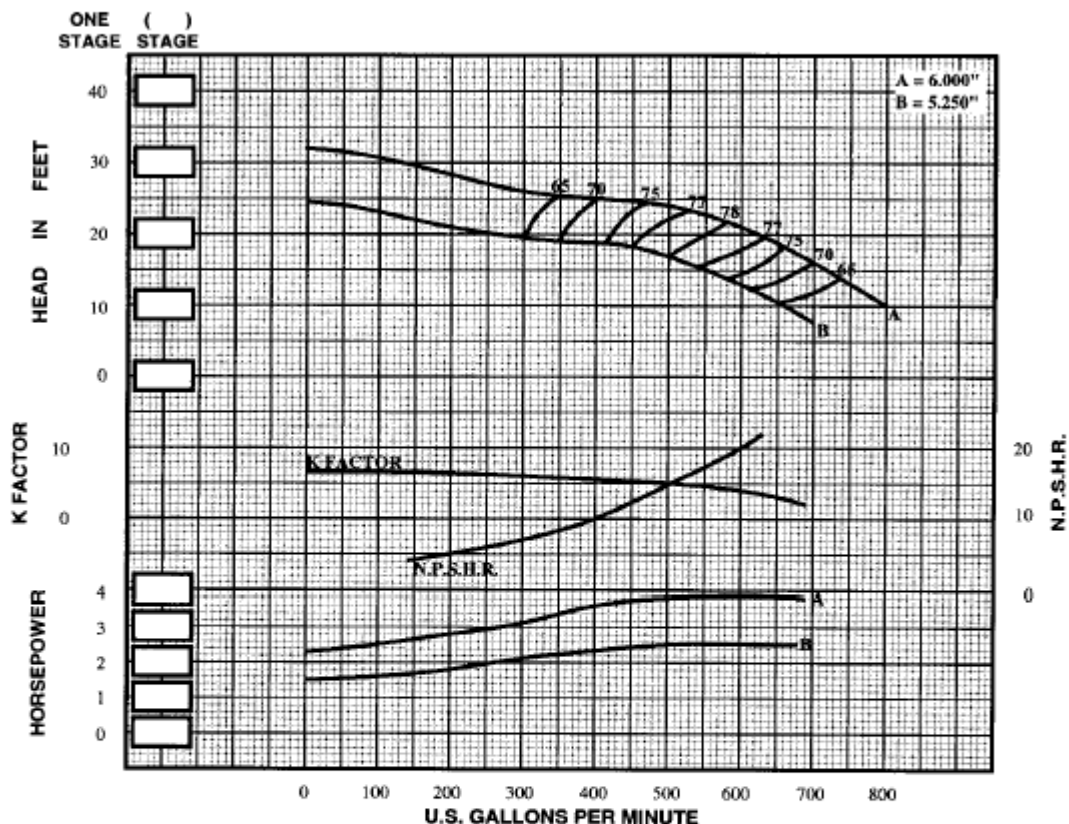


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.500"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SK8H	MAX. SHAFT DIA. = 1.500"	1	-4	IMP. - C.I.	-5
IMPELLER WT. - LBS. = 6.6	STD. LATERAL = 1.000"	2	-3	IMP. - NI-RI	-2
ONE STAGE WT. - LBS. = 180.0	DISCHARGE SIZES = 6"	3	-2	IMP. - S.S.	NOT RECOM.
ADD'L STAGE WT. - LBS. = 60.0	SUCTION SIZES = 6"	4	-1	BOWL - BRZ	-3
MAX. SPHERE SIZE = .750"	ONE STAGE W.P. ² = .133	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE* = 16"				BOWL - S.S.	-4

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

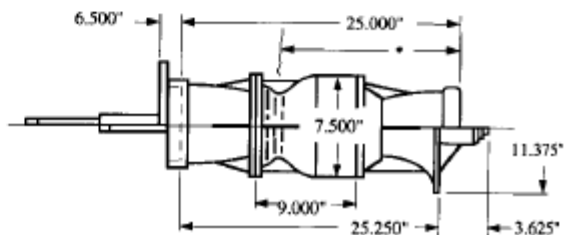

LINESHAFT TURBINE