


SECTION 202
PAGE 5.6
DATE 7/1/99
SUPERCEDES All Previous

SS5C


1770 R.P.M.

SIMFLO
PUMPS

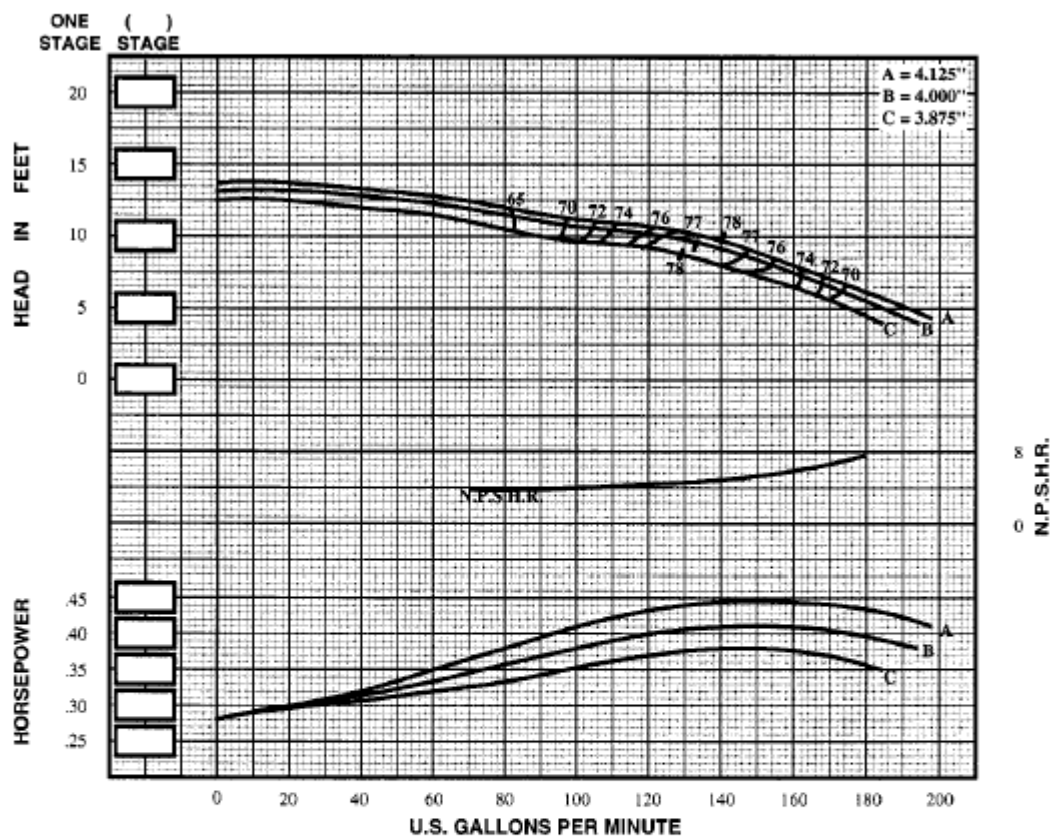

IMPELLER TYPE = enclosed	STD. SHAFT DIA. = .875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SS5H	MAX. SHAFT DIA. = .875"	1	-.4	IMP. - C.I.	-.4
IMPELLER WT. - LBS. = 1.95	STD. LATERAL = .075"	2	-.3	IMP. - NI-RI	-.3
ONE STAGE WT. - LBS. = 50	DISCHARGE SIZES = 3" - 4"	3	-.2	IMP. - S.S.	-.6
ADD'L STAGE WT. - LBS. = 14	SUCTION SIZES = 4"	4	-.1	BOWL - BRZ.	-.3
MAX. SPHERE SIZE = .500"	ONE STAGE WR ² = .015	5	0	BOWL - NI-RI	-.4
MIN. SUBMERGENCE = 10"	K FACTOR (max) = 2.50			BOWL - S.S.	-.5

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE