


SECTION 201
PAGE 18.4
DATE 7/1/99
SUPERCEDES All Previous

SB10C


3450 R.P.M.

SIMFLO
PUMPS

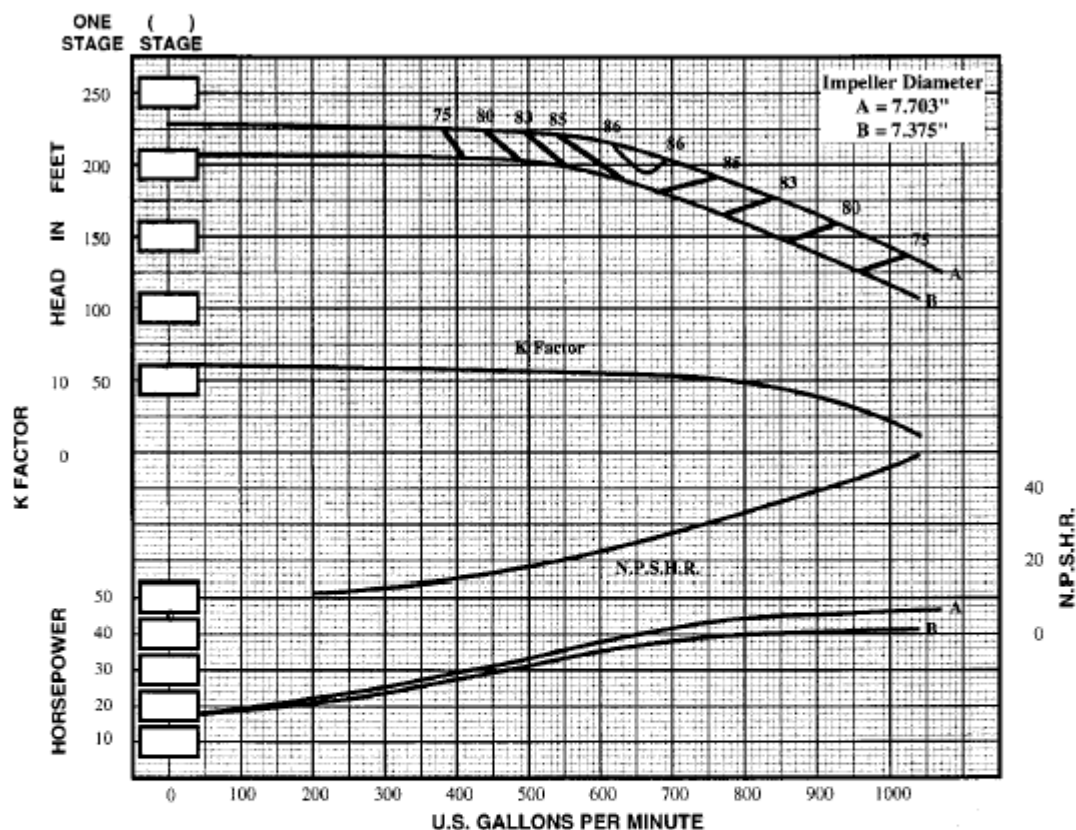


IMPELLER TYPE	= enclosed	STD. SHAFT DIA.	= 1.500"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SM9M	MAX. SHAFT DIA.	= 1.500"	1	-3	IMP. - C.I.	-2
IMPELLER WT. - LBS.	= 9.50	STD. LATERAL	= .750"	2	-2	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 150.0	DISCHARGE SIZES	= 6"	3	-1	IMP. - S.S.	-3
ADD'L STAGE WT. - LBS.	= 60.0	SUCTION SIZES	= 6"	4	0	BOWL - BRZ	-2
MAX. SPHERE SIZE	= .531"	ONE STAGE WR ²	= .303	5	0	BOWL - NI-RI	-1
* MIN. SUBMERGENCE	= 15"					BOWL - S.S.	-3

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

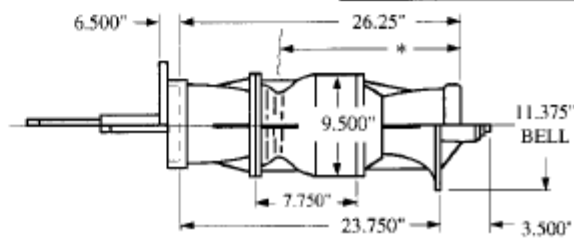

LINESHAFT TURBINE