




SF8C


3450 R.P.M.

SECTION 201
PAGE 13
DATE 7/1/99
SUPERCEDES All Previous

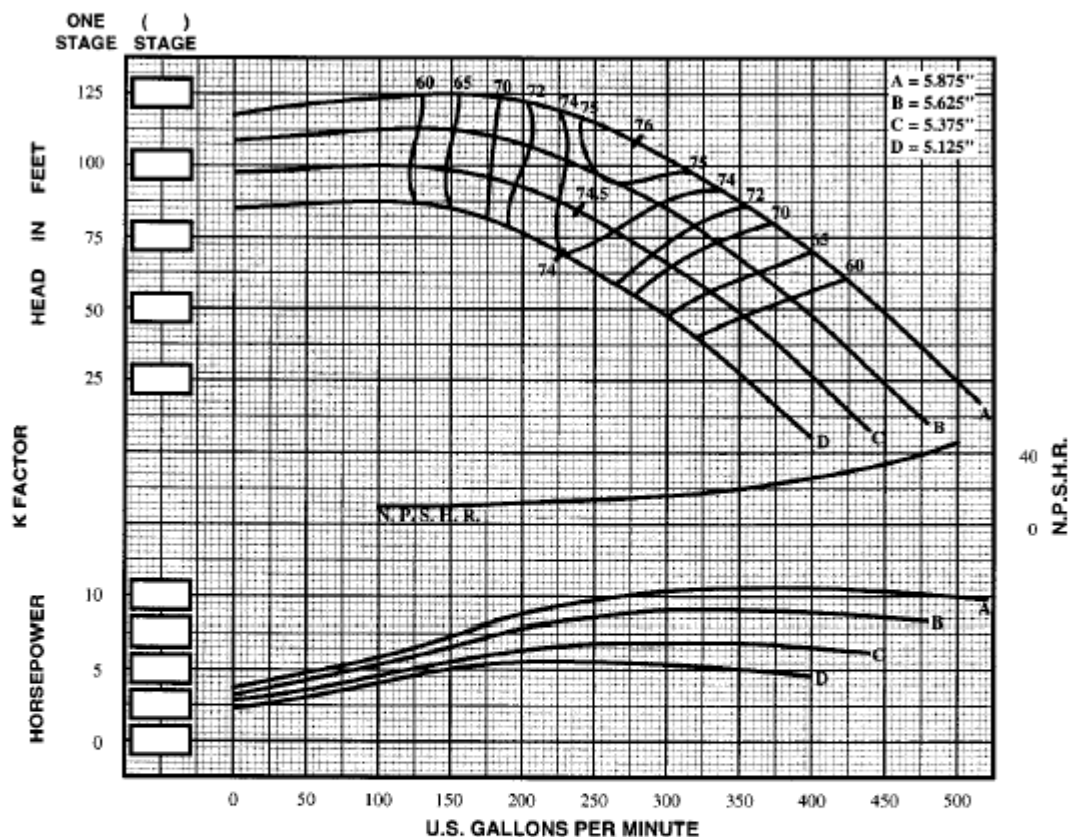


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= 1.250"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SS8L	MAX. SHAFT DIA.	= 1.250"	1	-4	IMP. - C.I.	Δ
IMPELLER WT. - LBS.	= 5.4	STD. LATERAL	= .625"	2	-3	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS.	= 122.0	DISCHARGE SIZES	= 4", 5"	3	-2	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS.	= 40.0	SUCTION SIZES	= 5"	4	-1	BOWL - BRZ.	Δ
MAX. SPHERE SIZE	= .313"	ONE STAGE W ²	= .108	5	0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE*	= 11"	K-FACTOR, MAX.	= 3.60			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

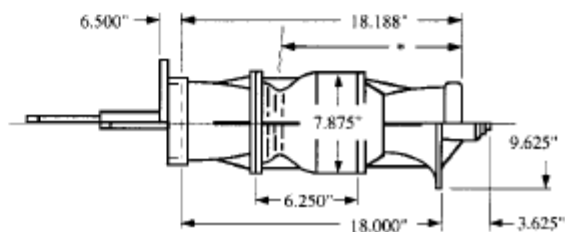

LINESHAFT TURBINE