




**SG10S**


**3450 R.P.M.**

SECTION 201  
PAGE 23  
DATE 12/1/97  
SUPERCEDES All Previous

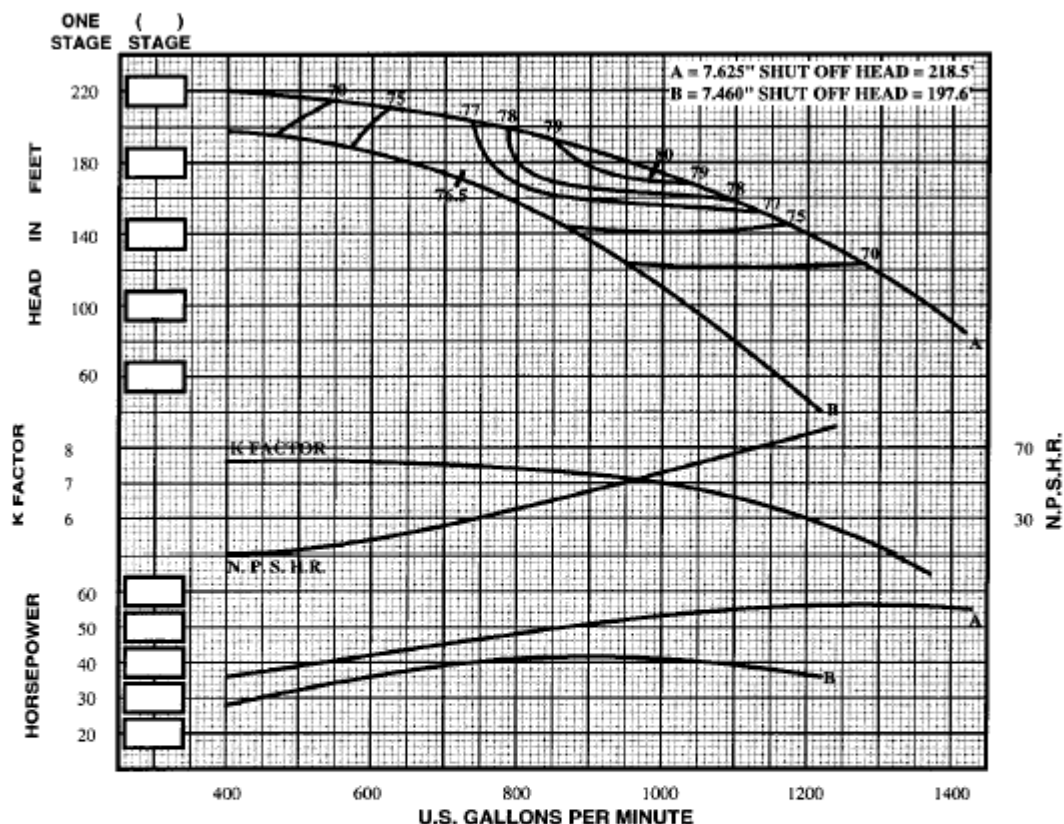


|                               |                                  |            |             |              |                    |
|-------------------------------|----------------------------------|------------|-------------|--------------|--------------------|
| IMPELLER TYPE = SEMI-OPEN     | STD. SHAFT DIA. = 1.500"         | NO. STAGES | EFF. CHANGE | MATERIAL     | B.E.P. EFF. CHANGE |
| IMPELLER NO. = SL9            | MAX. SHAFT DIA. = 1.500"         | 1          | -3          | IMP. - C.I.  | -4                 |
| IMPELLER WT. - LBS. = 6.2     | STD. LATERAL = .687"             | 2          | -2          | IMP. - NI-RI | -2                 |
| ONE STAGE WT. - LBS. = 190.0  | DISCHARGE SIZES = 6"             | 3          | -1          | IMP. - S.S.  | NOT RECOM.         |
| ADD'L STAGE WT. - LBS. = 60.0 | SUCTION SIZES = 6"               | 4          | 0           | BOWL - BRZ   | -3                 |
| MAX. SPHERE SIZE = .750"      | ONE STAGE WR <sup>2</sup> = .193 | 5          | 0           | BOWL - NI-RI | -1                 |
| MIN. SUBMERGENCE* = 14.5"     |                                  |            |             | BOWL - S.S.  | -4                 |

Δ CONSULT FACTORY



**SUBMERSIBLE TURBINE**

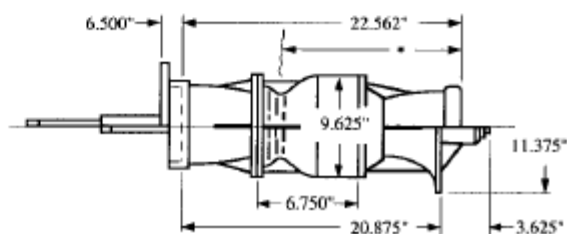

**LINESHAFT TURBINE**