


SECTION 201
PAGE 14
DATE 12/1/97
SUPERCEDES All Previous

SG8C


3450 R.P.M.

SIMFLO
PUMPS

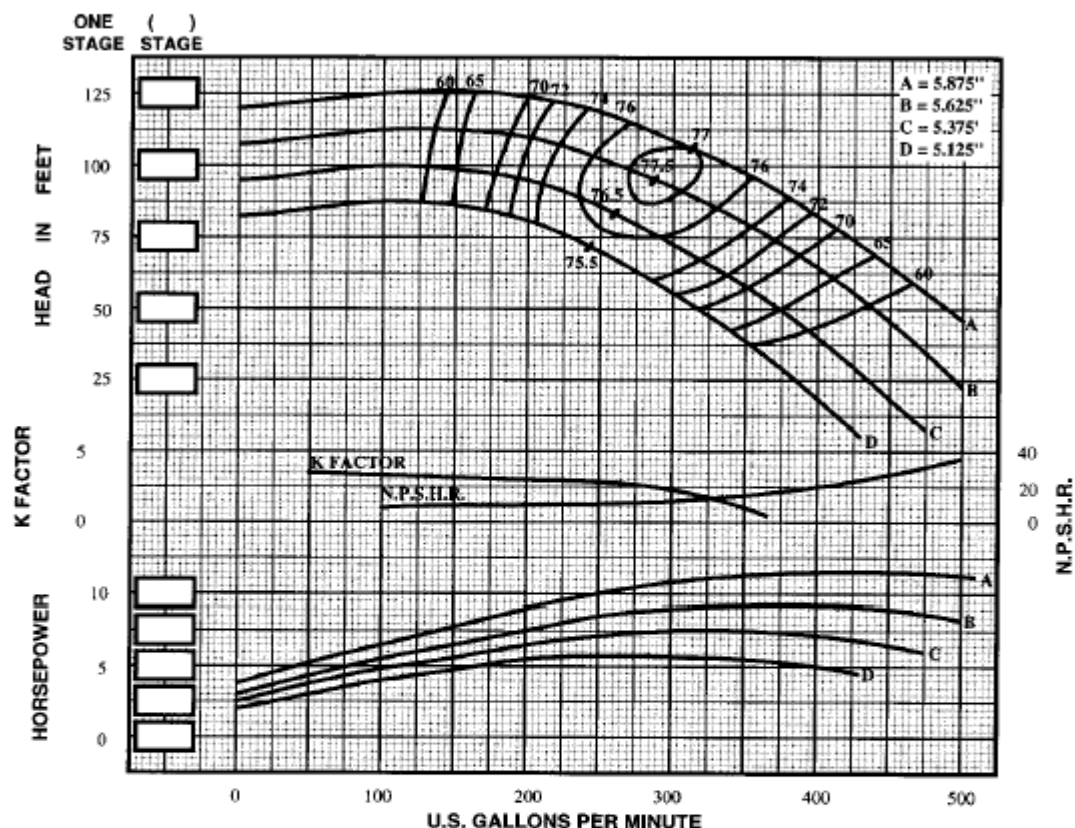


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= 1.250"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SP8M	MAX. SHAFT DIA.	= 1.250"	1	-4	IMP. - C.I.	-2
IMPELLER WT. - LBS.	= 5.15	STD. LATERAL	= .750"	2	-3	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 100.0	DISCHARGE SIZES	= 4", 5", 6"	3	-2	IMP. - S.S.	-4
ADD'L STAGE WT. - LBS.	= 40.0	SUCTION SIZES	= 5"	4	-1	BOWL - BRZ.	-2
MAX. SPHERE SIZE	= .563	ONE STAGE WR ²	= .105	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE*	= 11"					BOWL - S.S.	-3

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

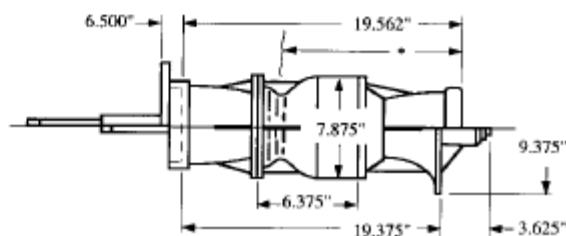

LINESHAFT TURBINE