


SECTION 201
PAGE 16
DATE 12/1/97
SUPERCEDES All Previous

SJ8S


3450 R.P.M.

SIMFLO
PUMPS

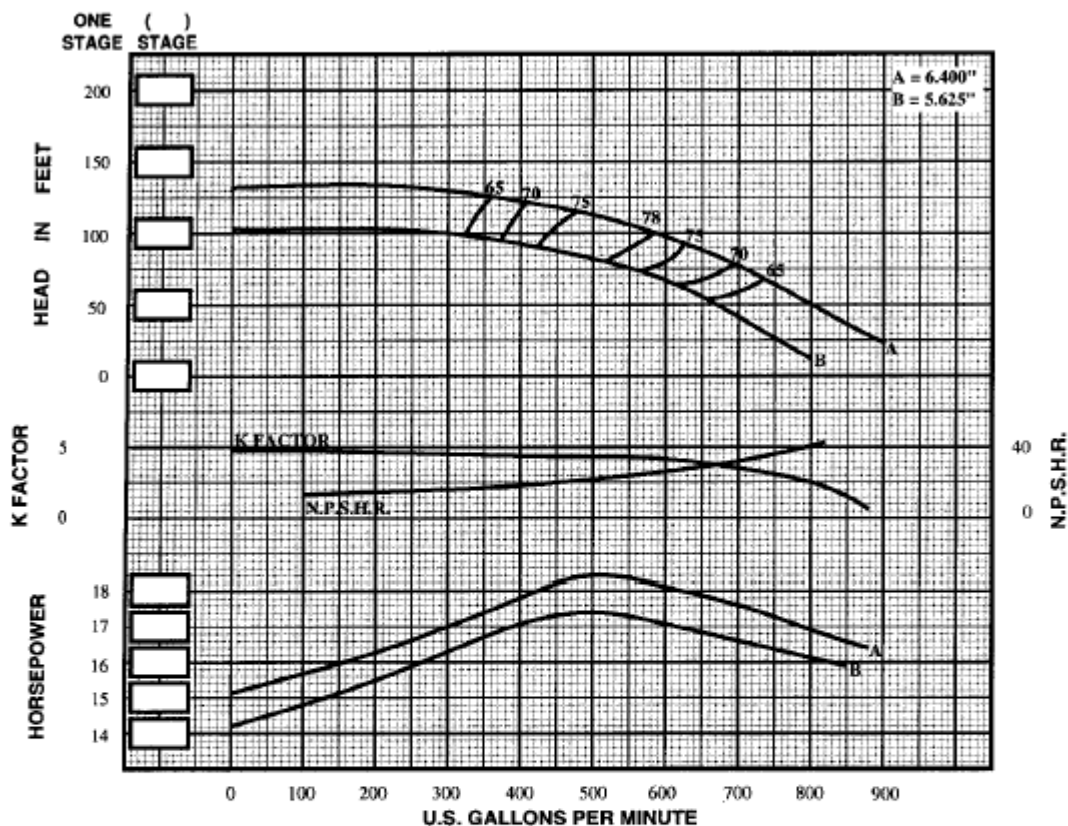


IMPELLER TYPE = SEMI-OPEN	STD. SHAFT DIA. = 1.250"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = S805	MAX. SHAFT DIA. = 1.250"				
IMPELLER WT. - LBS. = 5.0	STD. LATERAL = .688"	1	-4	IMP. - C.I.	-4
ONE STAGE WT. - LBS. = 100.0	DISCHARGE SIZES = 5", 6"	2	-3	IMP. - NI-RI	-2
ADD'L STAGE WT. - LBS. = 40.0	SUCTION SIZES = 5"	3	-2	IMP. - S.S.	NOT RECOM.
MAX. SPHERE SIZE = .594"	ONE STAGE WR ² = .112	4	-1	BOWL - BRZ.	-2
MIN. SUBMERGENCE* = 11"		5	0	BOWL - NI-RI	-1
				BOWL - S.S.	-3

* CONSULT FACTORY

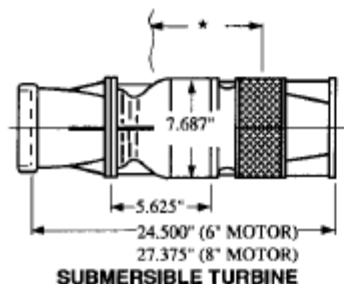

SUBMERSIBLE TURBINE

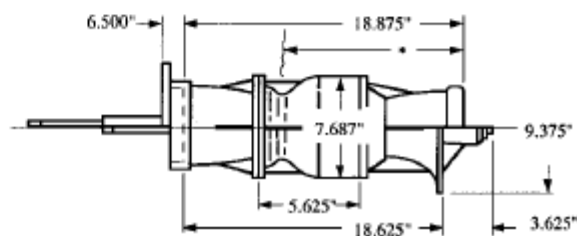

LINESHAFT TURBINE