




SL7C


3450 R.P.M.

SECTION 201
PAGE 11
DATE 12/1/97
SUPERCEDES All Previous

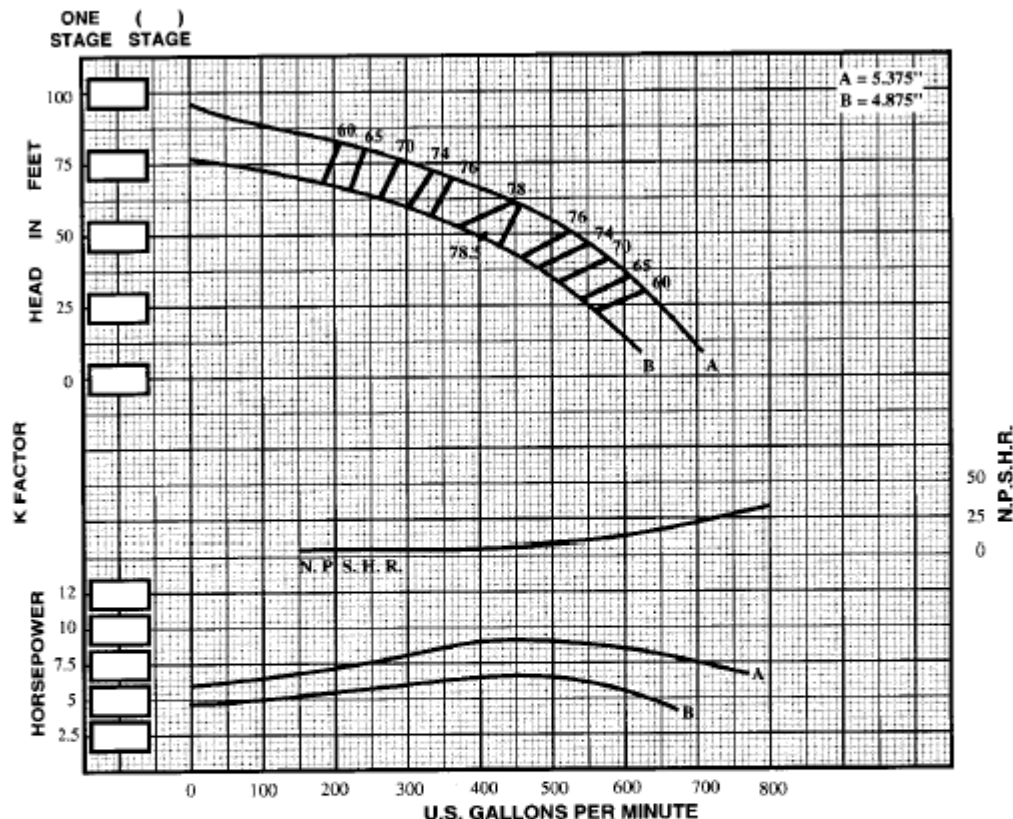

IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.000"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SF7M	MAX. SHAFT DIA. = 1.000"	1	-3.5	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 2.90	STD. LATERAL = .188"	2	-2.0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 59	DISCHARGE SIZES = 5", 6"	3	-1.0	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 20	SUCTION SIZES = 6"	4	-0.5	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = .563	ONE STAGE WRP = .046	5	0.0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 20"	K FACTOR = 4.29			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE