




**SL9C**


**3450 R.P.M.**

SECTION 201  
PAGE 25  
DATE 12/1/97  
SUPERCEDES All Previous

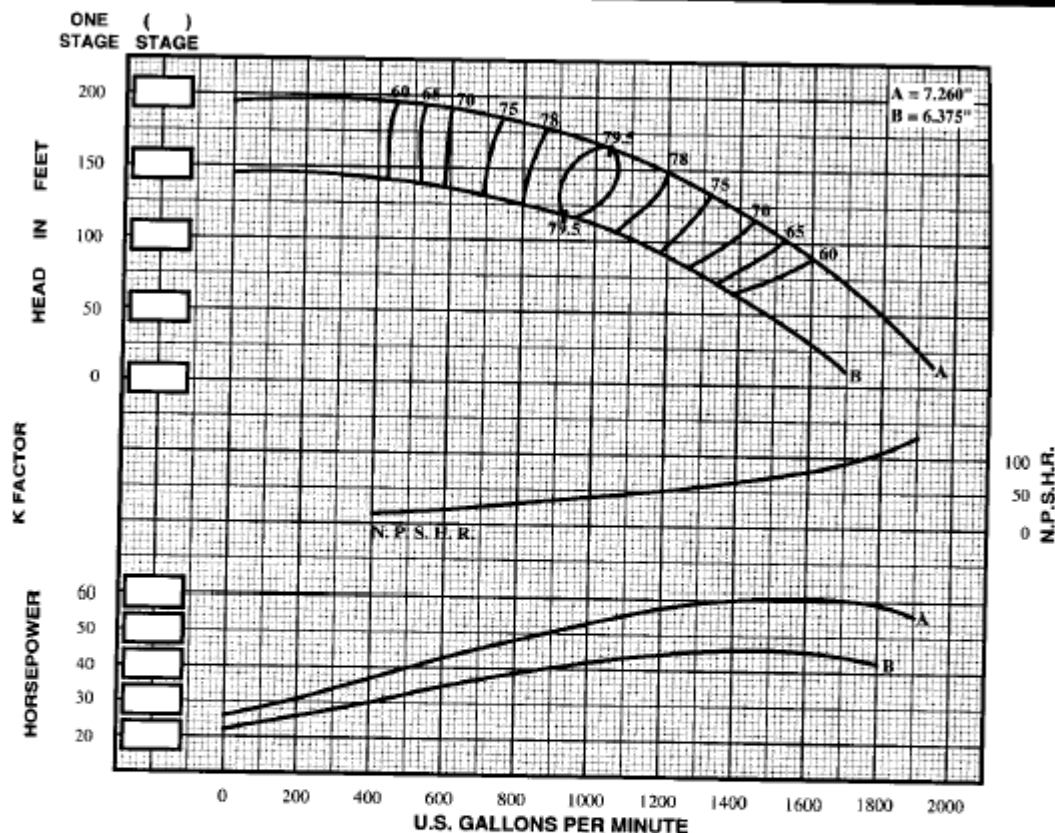


|                               |                                  |            |             |              |                    |
|-------------------------------|----------------------------------|------------|-------------|--------------|--------------------|
| IMPELLER TYPE = ENCLOSED      | STD. SHAFT DIA. = 1.500"         | NO. STAGES | EFF. CHANGE | MATERIAL     | B.E.P. EFF. CHANGE |
| IMPELLER NO. = SL9H           | MAX. SHAFT DIA. = 1.500"         | 1          | -3          | IMP. - C.I.  | Δ                  |
| IMPELLER WT. - LBS. = 8.65    | STD. LATERAL = .937"             | 2          | -2          | IMP. - NI-RI | Δ                  |
| ONE STAGE WT. - LBS. = 135.0  | DISCHARGE SIZES = 6"             | 3          | -1          | IMP. - S.S.  | Δ                  |
| ADD'L STAGE WT. - LBS. = 53.0 | SUCTION SIZES = 6"               | 4          | 0           | BOWL - BRZ   | Δ                  |
| MAX. SPHERE SIZE = .875"      | ONE STAGE WR <sup>2</sup> = .248 | 5          | 0           | BOWL - NI-RI | Δ                  |
| MIN. SUBMERGENCE* = 15"       | K-FACTOR, MAX. = 5.7             |            |             | BOWL - S.S.  | Δ                  |

Δ CONSULT FACTORY



**SUBMER**

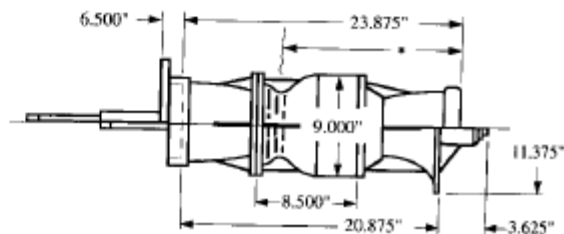

**LINESHAFT TURBINE**