


SECTION 201
PAGE 2
DATE 7/1/99
SUPERCEDES All Previous

SM4C


3450 R.P.M.

SIMFLO
PUMPS

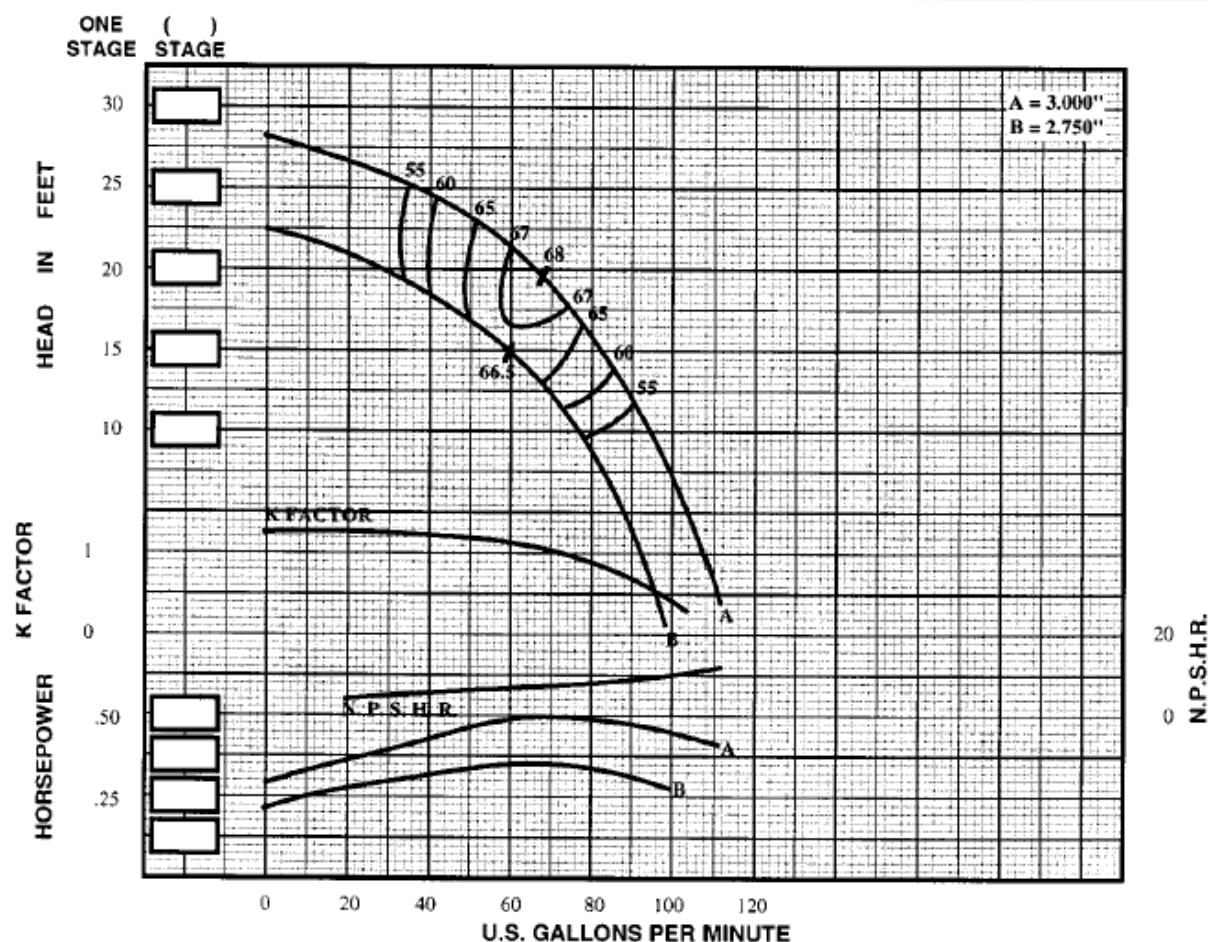


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = .875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SS4M	MAX. SHAFT DIA. = .875"	1	-6.5	IMP. - C.I.	-5
IMPELLER WT. - LBS. = 0.9	STD. LATERAL = .160"	2	-5	IMP. - NI-RI	-2
ONE STAGE WT. - LBS. = 20.0	DISCHARGE SIZES = 2.50"	3	-3.5	IMP. - S.S.	NOT RECOM.
ADD'L STAGE WT. - LBS. = 5.8	SUCTION SIZES = 3.00"	4	-2	BOWL - BRZ.	0
MAX. SPHERE SIZE = .250"	ONE STAGE WR ² = .005	5	-1	BOWL - NI-RI	-1
MIN. SUBMERGENCE* = 6"				BOWL - S.S.	NOT RECOM.

Δ CONSULT FACTORY

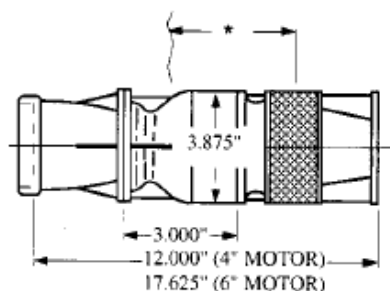

SUBMERSIBLE TURBINE

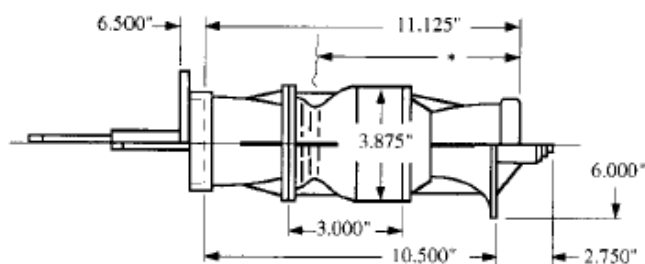

LINESHAFT TURBINE