


SECTION 201
PAGE 32
DATE 12/1/97
SUPERCEDES All Previous

SV10C


3450 R.P.M.

SIMFLO
PUMPS

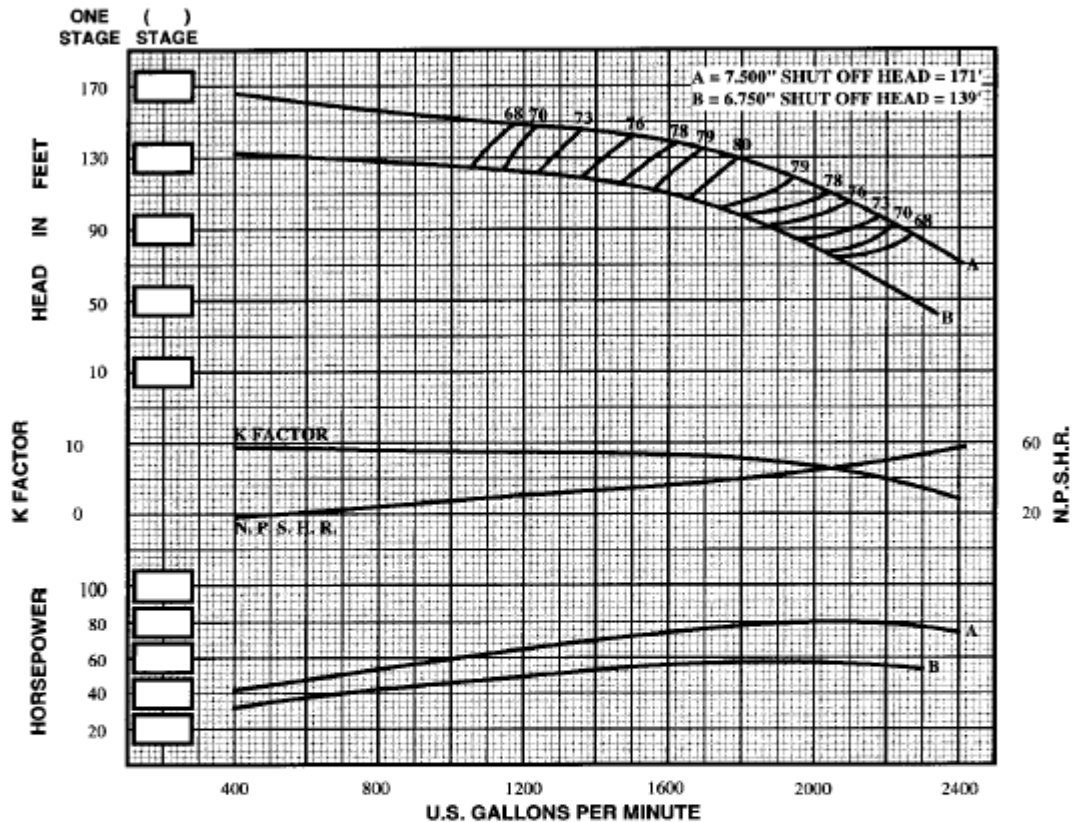


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.688"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SK10M	MAX. SHAFT DIA. = 1.688"				
IMPELLER WT. - LBS. = 14.9	STD. LATERAL = 1.564"	1	-4	IMP. - C.I.	-3
ONE STAGE WT. - LBS. = 250.0	DISCHARGE SIZES = 8"	2	-3	IMP. - NI-RI	-2
ADD'L STAGE WT. - LBS. = 85.0	SUCTION SIZES = 8"	3	-2	IMP. - S.S.	NOT RECOM.
MAX. SPHERE SIZE = 1.125"	ONE STAGE WPT = .462	4	-1	BOWL - BRZ.	-2
MIN. SUBMERGENCE* = 18"		5	0	BOWL - NI-RI	-1
				BOWL - S.S.	-3

Δ CONSULT FACTORY

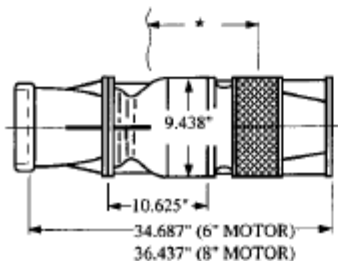

SUBMERSIBLE TURBINE

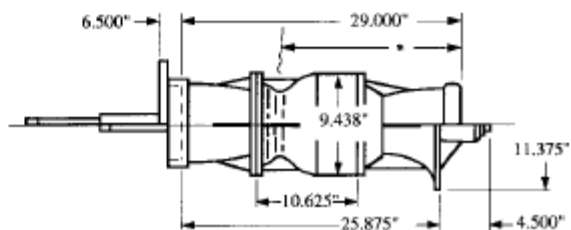

LINESHAFT TURBINE