


SECTION 205
PAGE 2
DATE 7/1/99
SUPERCEDES All Previous

SR24C


700 R.P.M.

SIMFLO
PUMPS

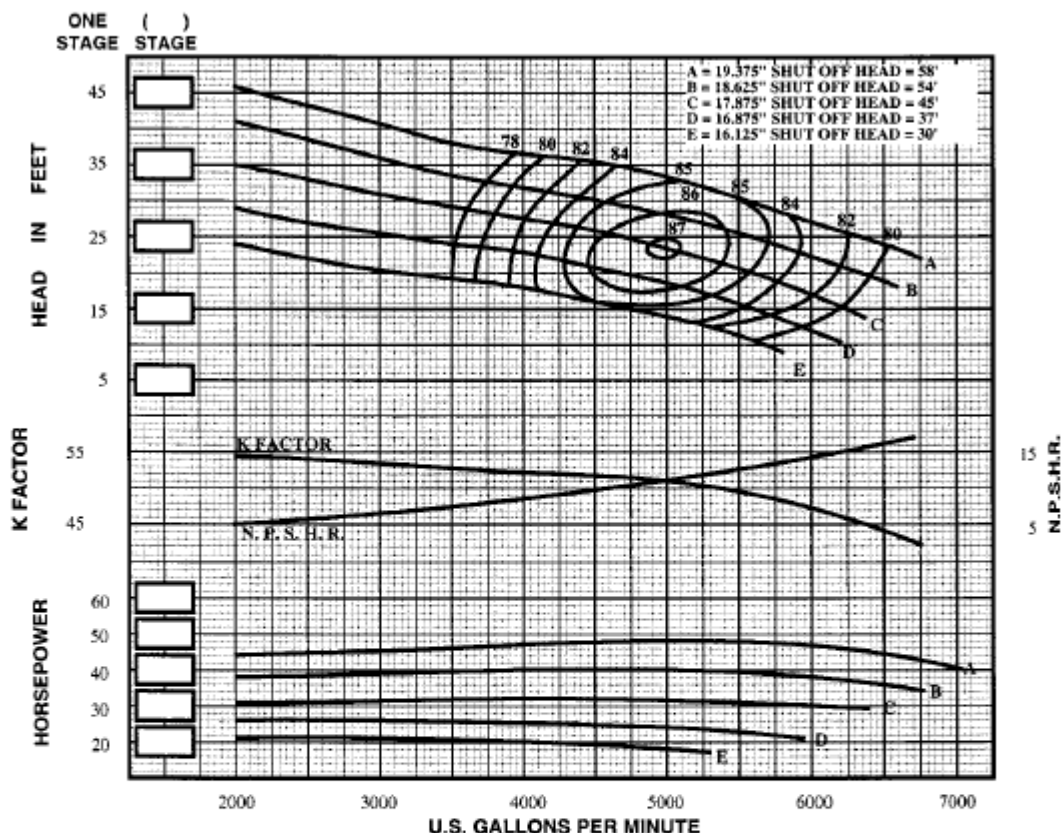


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 2.187"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SR24C	MAX. SHAFT DIA. = 2.937"	1	0	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 112.0	STD. LATERAL = 1.375"	2	0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 1200.0	DISCHARGE SIZES = 14", 16", 18"	3	0	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 625.0	SUCTION SIZES = bell	4	0	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = 1.875"	ONE STAGE WR ² = 19.03	5	0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 56"	=			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

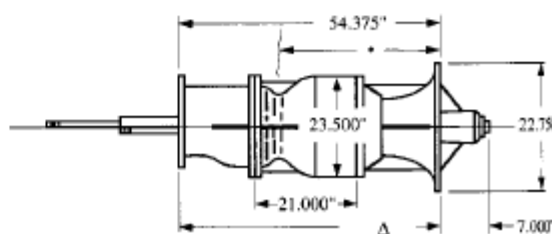

LINESHAFT TURBINE