




SR28C


700 R.P.M.

SECTION 205
PAGE 3
DATE 7/1/99
SUPERCEDES All Previous

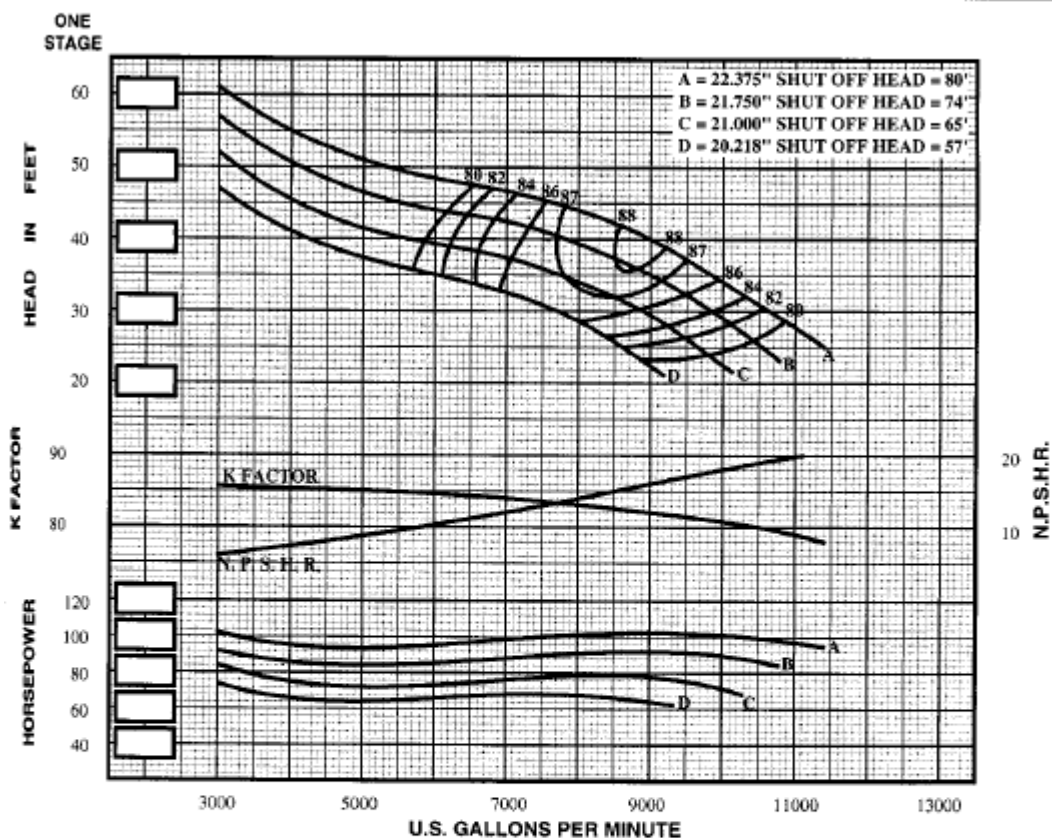


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 2.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SR28C	MAX. SHAFT DIA. = 3.188"	1	0	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 218.0	STD. LATERAL = 2.062"	2	0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 2100.0	DISCHARGE SIZES = 16", 18", 20"	3	0	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 1000.0	SUCTION SIZES = 6"	4	0	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = 1.875"	ONE STAGE WR ³ = 39.62	5	0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 64"				BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

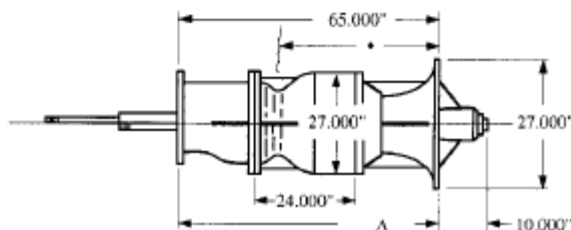

LINESHAFT TURBINE