


SECTION 204
PAGE 6
DATE 7/1/99
SUPERCEDES All Previous

SK16C


880 R.P.M.

SIMFLO
PUMPS

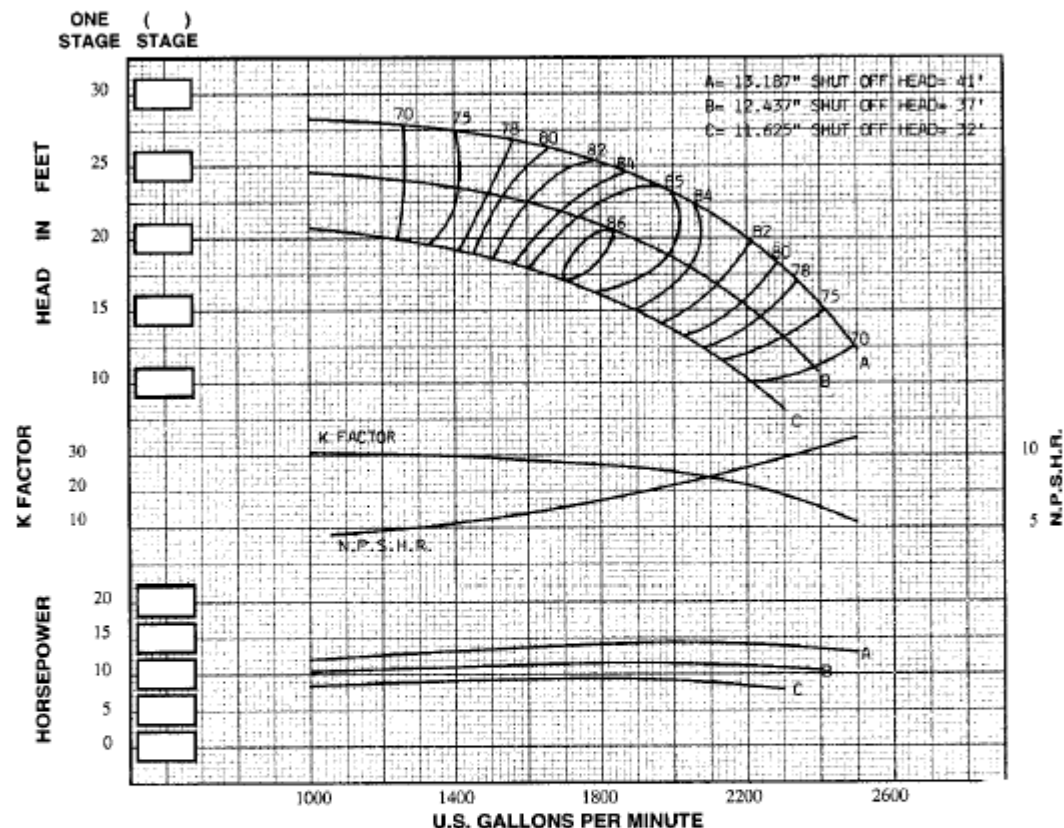


IMPELLER TYPE	= ENCLOSED	STD. SHAFT DIA.	= 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SK16C	MAX. SHAFT DIA.	= 2.250"				
IMPELLER WT. - LBS.	= 39.0	STD. LATERAL	= .750"	1	-3	IMP. - C.I.	0
ONE STAGE WT. - LBS.	= 600.0	DISCHARGE SIZES	= 12", 14"	2	-2	IMP. - NI-RI	-2
ADD'L STAGE WT. - LBS.	= 250.0	SUCTION SIZES	= 12", BELL	3	-1	IMP. - S.S.	-1
MAX. SPHERE SIZE	= 1.000"	ONE STAGE WR ²	= 4.966	4	0	BOWL - BRZ.	-1
MIN. SUBMERGENCE*	= 36"			5	0	BOWL - NI-RI	-1
						BOWL - S.S.	-2

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

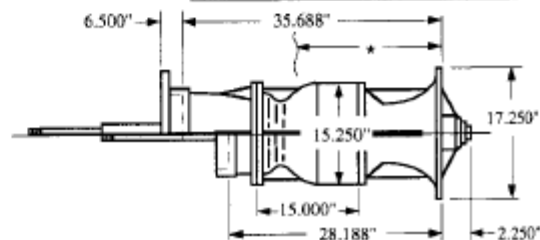

LINESHAFT TURBINE