




SP16S


880 R.P.M.

SECTION 204
PAGE 7
DATE 7/1/99
SUPERCEDES All Previous

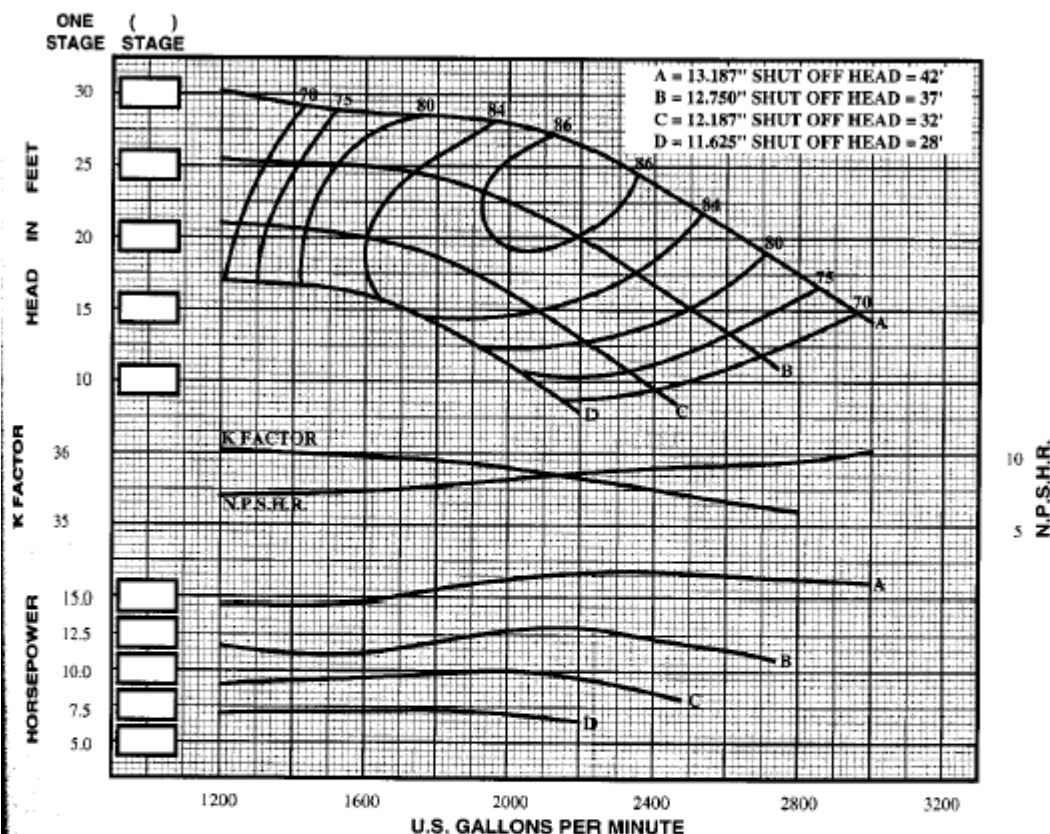


IMPELLER TYPE	= SEMI-OPEN	STD. SHAFT DIA.	= 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	= SP16S	MAX. SHAFT DIA.	= 2.250"	1	-3	IMP. - C.I.	-3
IMPELLER WT. - LBS.	= 25.0	STD. LATERAL	= .875"	2	-2	IMP. - NI-RI	-2
ONE STAGE WT. - LBS.	= 600.0	DISCHARGE SIZES	= 12", 14"	3	-1	IMP. - S.S.	-1
ADD'L STAGE WT. - LBS.	= 250.0	SUCTION SIZES	= 12", BELL	4	0	BOWL - BRZ.	-2
MAX. SPHERE SIZE	= 1.218"	ONE STAGE WR ²	= 2.24	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE*	= 39"					BOWL - S.S.	-2

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

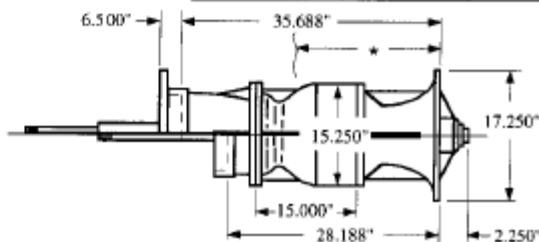

LINESHAFT TURBINE