


SECTION 204
PAGE 8
DATE 12/1/97
SUPERCEDES All Previous

SR16C


880 R.P.M.

SIMFLO
PUMPS

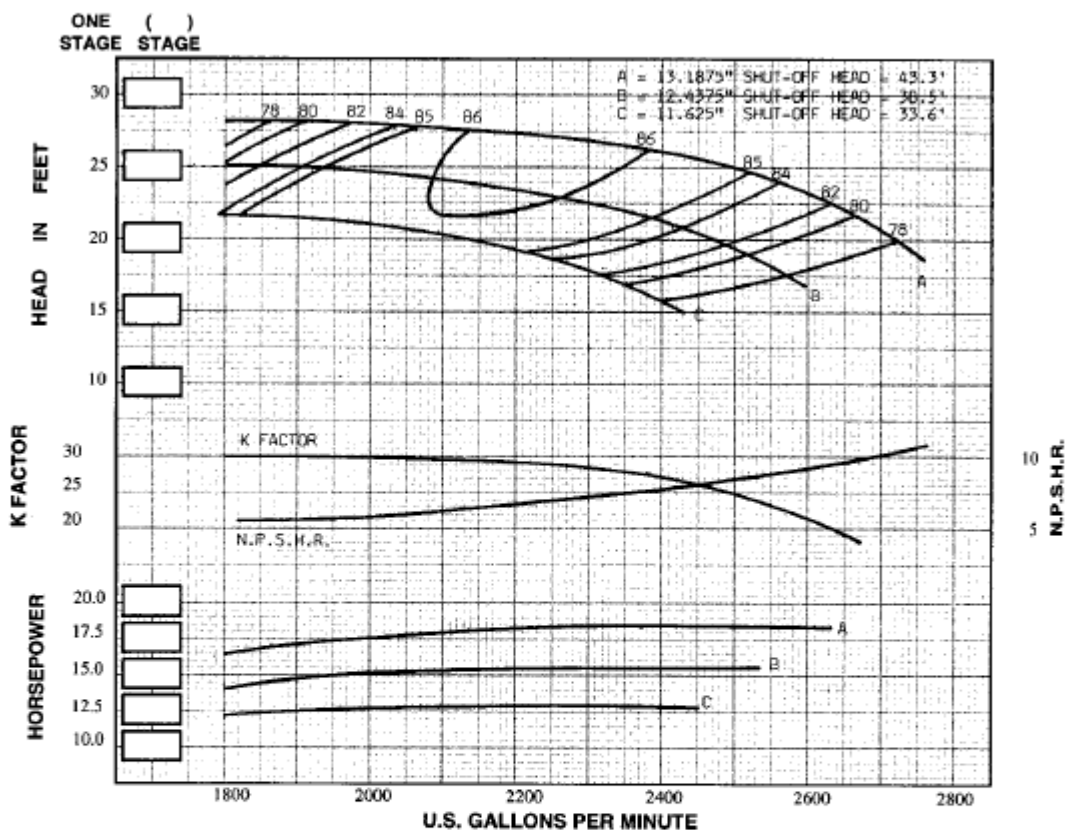


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SR16C	MAX. SHAFT DIA. = 2.250"	1	-3	IMP. - C.I.	-3
IMPELLER WT. - LBS. = 35.5	STD. LATERAL = .750"	2	-2	IMP. - NI-RI	-2
ONE STAGE WT. - LBS. = 600.0	DISCHARGE SIZES = 12", 14"	3	-1	IMP. - S.S.	-1
ADD'L STAGE WT. - LBS. = 250.0	SUCTION SIZES = 12", BELL	4	0	BOWL - BRZ.	-2
MAX. SPHERE SIZE = 1.375"	ONE STAGE WR ² = 4.677	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE* = 39"				BOWL - S.S.	-2

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

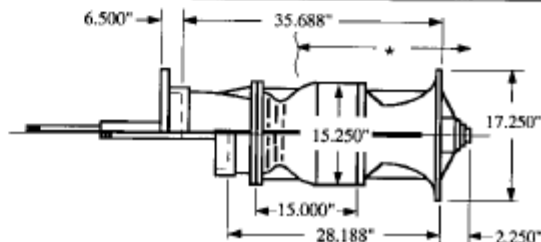

LINESHAFT TURBINE