


SECTION 204
PAGE 10
DATE 7/1/99
SUPERCEDES All Previous

SR20C


880 R.P.M.

SIMFLO
PUMPS

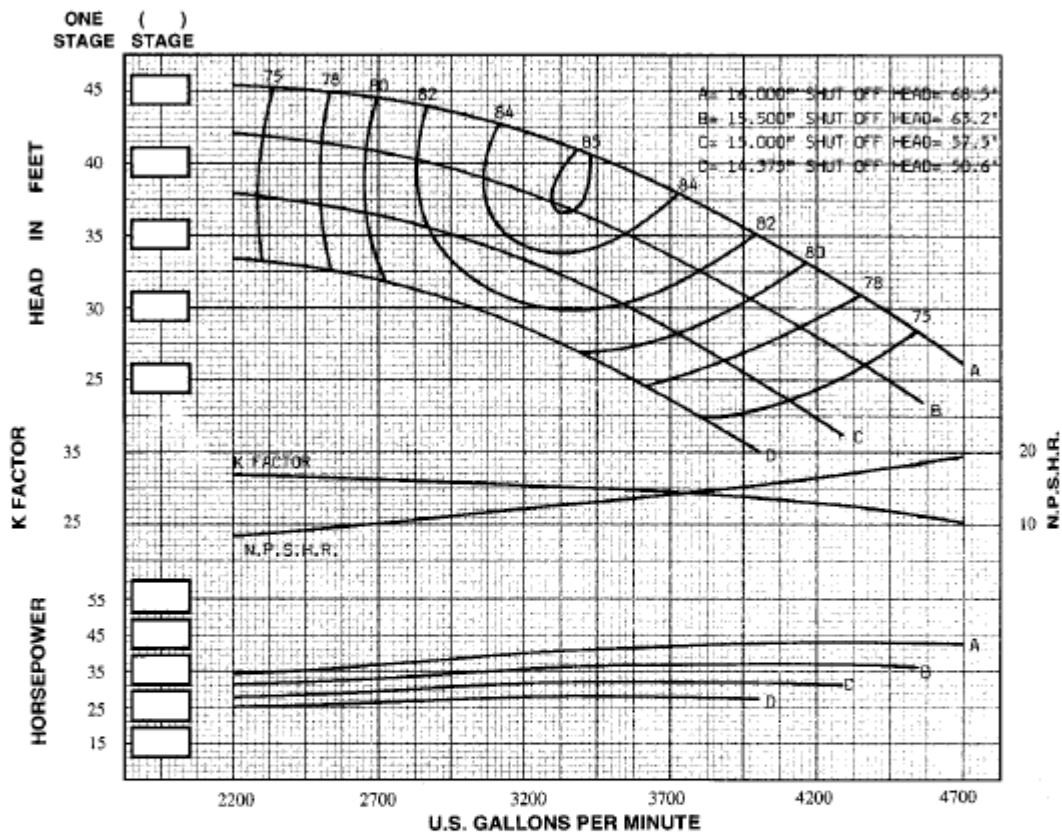


IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.937"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SR20C	MAX. SHAFT DIA. = 2.437"	1	0	IMP. - C.I.	Δ
IMPELLER WT. - LBS. = 69.0	STD. LATERAL = 1.218"	2	0	IMP. - NI-RI	Δ
ONE STAGE WT. - LBS. = 1000.0	DISCHARGE SIZES = 12", 14", 16"	3	0	IMP. - S.S.	Δ
ADD'L STAGE WT. - LBS. = 450.0	SUCTION SIZES = bell	4	0	BOWL - BRZ.	Δ
MAX. SPHERE SIZE = 1.281"	ONE STAGE WR ² = 8.21	5	0	BOWL - NI-RI	Δ
MIN. SUBMERGENCE* = 46"	=			BOWL - S.S.	Δ

Δ CONSULT FACTORY



SUBMERSIBLE TURBINE

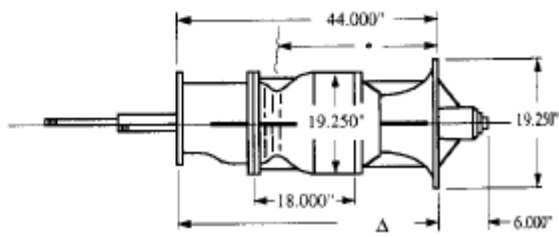

LINESHAFT TURBINE