

PERFORMANCE CURVES

THIS CURVE SHOWS ONE STAGE PERFORMANCE.
EFFICIENCY IS SHOWN FOR 4 STAGES.
HORSEPOWER IS SHOWN FOR ONE STAGE BASED
ON 4 STAGE EFFICIENCY.

12KEL

1760

6 RK 13

R. P. M.

BOWL O.D. 11 1/2" THRUST FACTOR 9.6

IMP. DIAM.

A = 9.18


B = 8.82

C = 8.50

D =

TOTAL HEAD - FEET

BRAKE HORSEPOWER

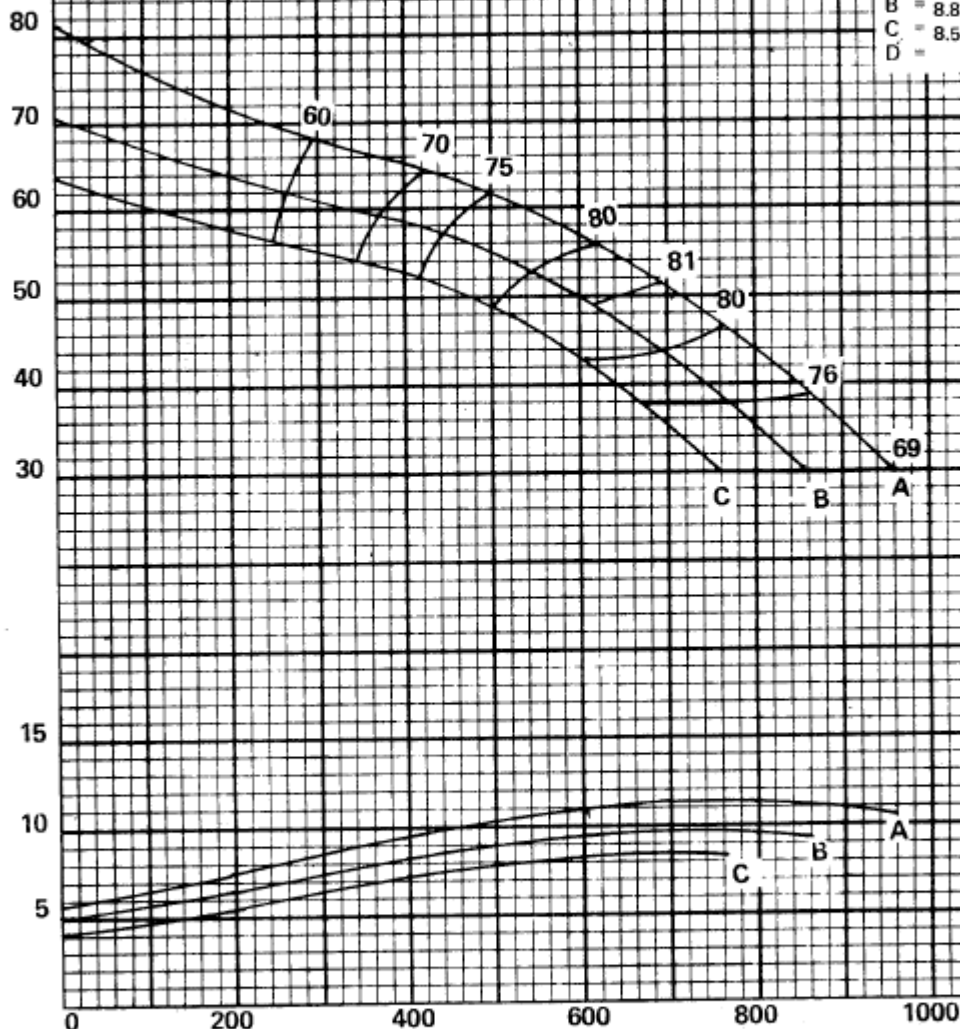

CAPACITY U.S. G. P. M.

No. Stages	Eff. Change	MATERIAL	Eff. Change	Rotor Wt. - Lbs.	25.9
1	-3	BOWL		One Stage Wt. - Lbs.	310
2	-2	C.I.	-1	Add One Stage Wt. - Lbs.	115
3	-1	C.I. ENM	0	Max. No. Stages	10
4	0	IMP.		Discharge Size	8
5		BRZ	0	Suction Size	8
6				Lateral	0.90'
				Shaft Diameter	1.688"

