

WellLine
by


LAYNE & BOWLER, INC.
BOX 8097 MEMPHIS, TN 38108

12 KM


1760 R. P. M.

THIS CURVE SHOWS ONE STAGE PERFORMANCE WITH ENAMELLED CAST IRON BOWL AND BRONZE IMPELLER. EFFICIENCY IS SHOWN FOR 3 STAGES. HORSEPOWER IS SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY.

ONE ()
STAGE STAGES

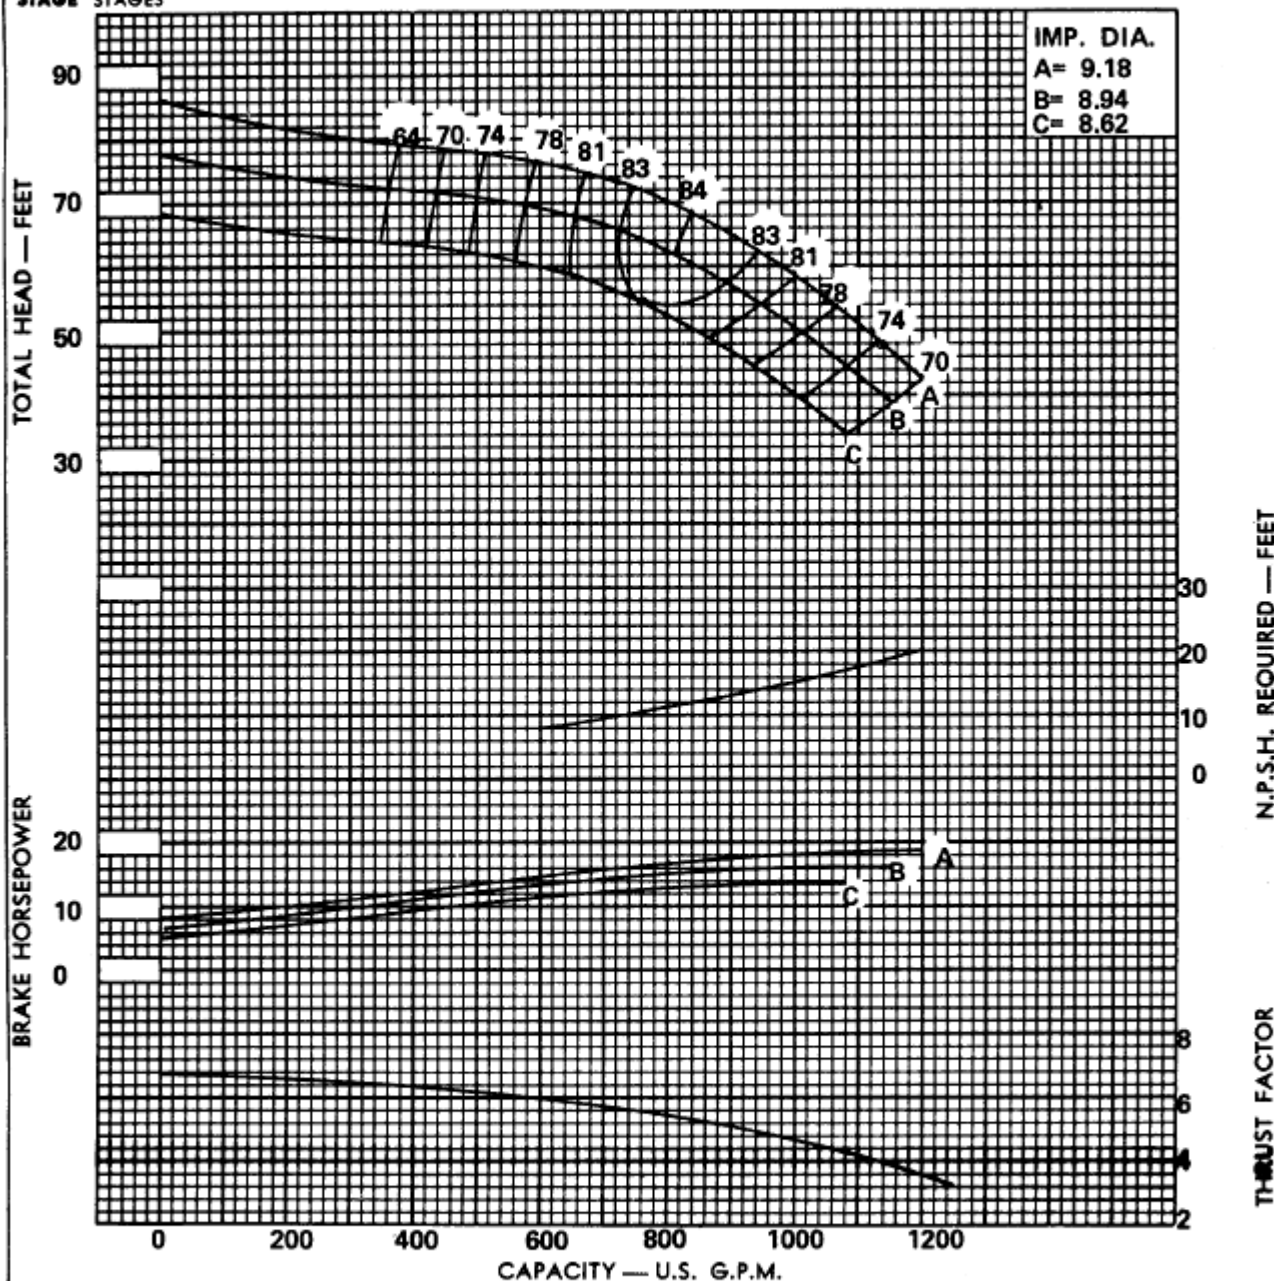

No. Stages	Eff. Change	MATERIAL	Eff. Change	Rotor Wt.	= 21.4 lbs.
1	-2	BOWL		One Stage Wt.	= 278 lbs.
2	-1	C. I.	-1	Add One Stage Wt.	= 105 lbs.
3	0	C.I. ENM	0	Max. No. Stages	= 14
4		IMPELLER		Discharge Size	= 8 in.
5		BRZ.	0	Suction Size	= 8 in.
6				Lateral	= 0.70 in.
				Shaft Diameter	= 1.687 in.

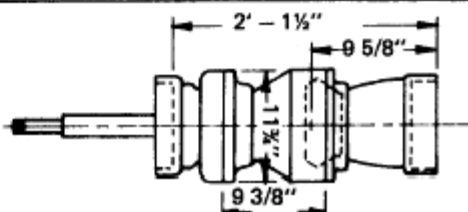

N.P.S.H. REQUIRED — FEET

THRUST FACTOR