

**WellLine**  
by

**LAYNE & BOWLER, INC.**  
BOX 8097 MEMPHIS, TN 38108


14 MM

1770

R. P. M.

THIS CURVE SHOWS ONE STAGE PERFORMANCE WITH ENAMELLED CAST IRON BOWL AND BRONZE IMPELLER. EFFICIENCY IS SHOWN FOR 2 STAGES. HORSEPOWER IS SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY.

ONE ( )  
STAGE STAGES

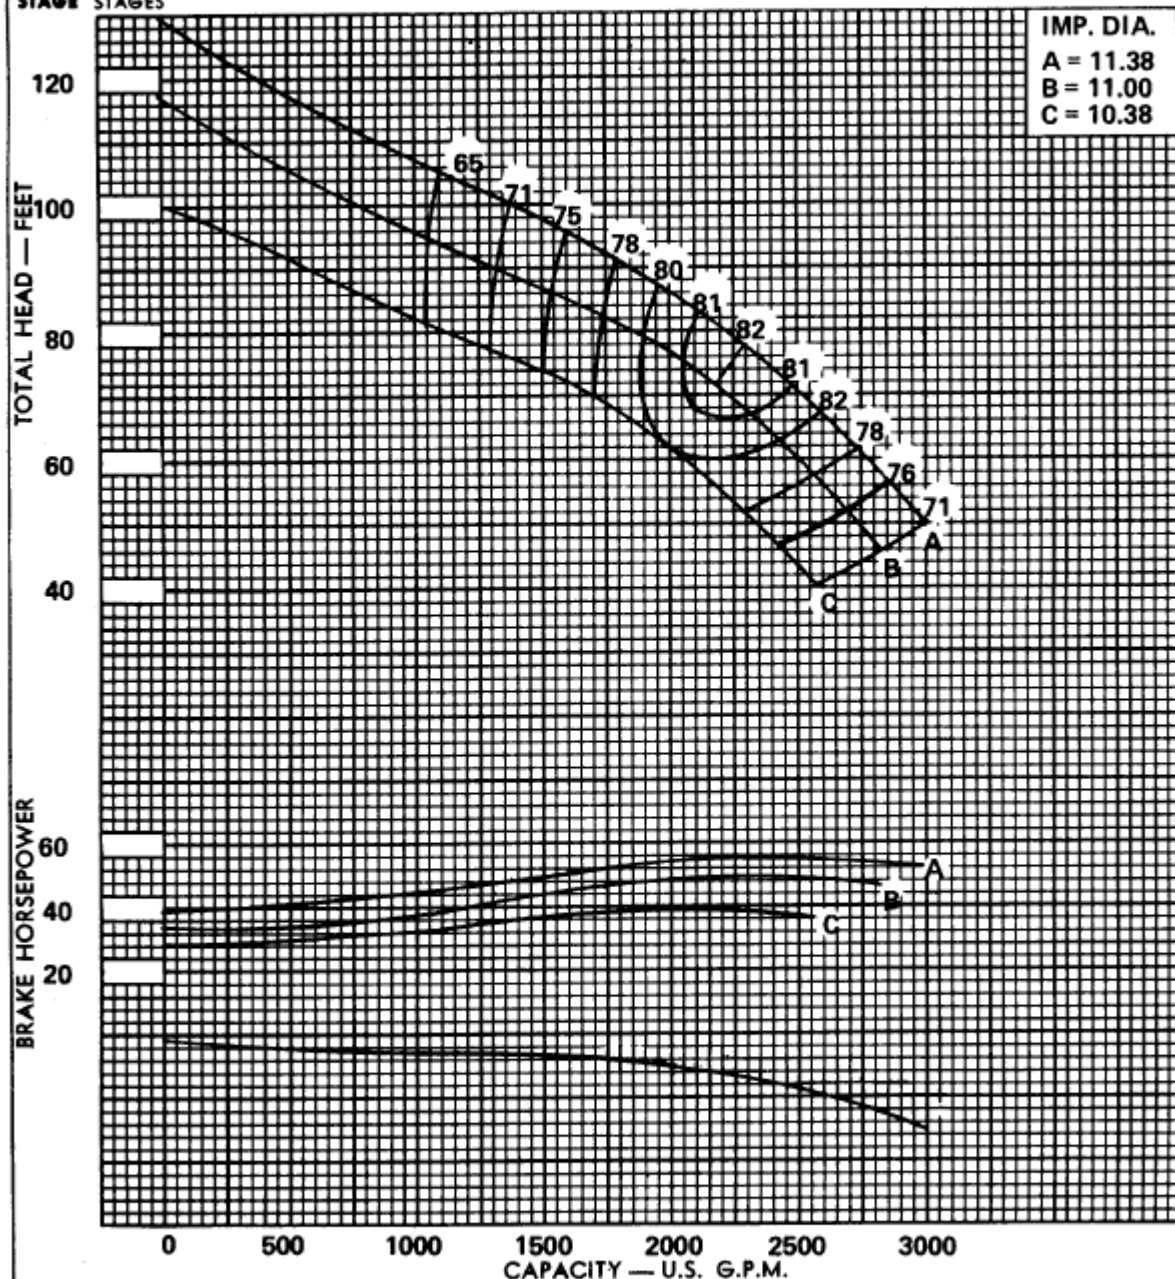

N.P.S.H. REQUIRED — FEET

THRUST FACTOR

| No. Stages | Eff. Change | MATERIAL | Eff. Change | Rotor Wt. = 44.5 lbs.        |
|------------|-------------|----------|-------------|------------------------------|
| 1          | 0           | BOWL     |             | One Stage Wt. = 404 lbs.     |
| 2          | 0           | C. I.    | -1          | Add One Stage Wt. = 159 lbs. |
| 3          |             | C.I. ENM | 0           | Max. No. Stages = 8          |
| 4          |             | IMPELLER |             | Discharge Size = 10 in.      |
| 5          |             | BRZ.     | 0           | Suction Size = 10 in.        |
| 6          |             |          |             | Lateral = 1.00 in.           |
|            |             |          |             | Shaft Diameter = 2.187 in.   |

