

12/1/76
NEW

SECTION 300
CURVE NO. WL-18-021

Well
Line


LAYNE & BOWLER, INC.
BOX 8097 MEMPHIS, TN 38108

6 KH

1750 R. P. M.

THIS CURVE SHOWS ONE STAGE PERFORMANCE WITH ENAMELLED CAST IRON BOWL AND BRONZE IMPELLER. EFFICIENCY IS SHOWN FOR 4 STAGES. HORSEPOWER IS SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY.

ONE ()
STAGE STAGES

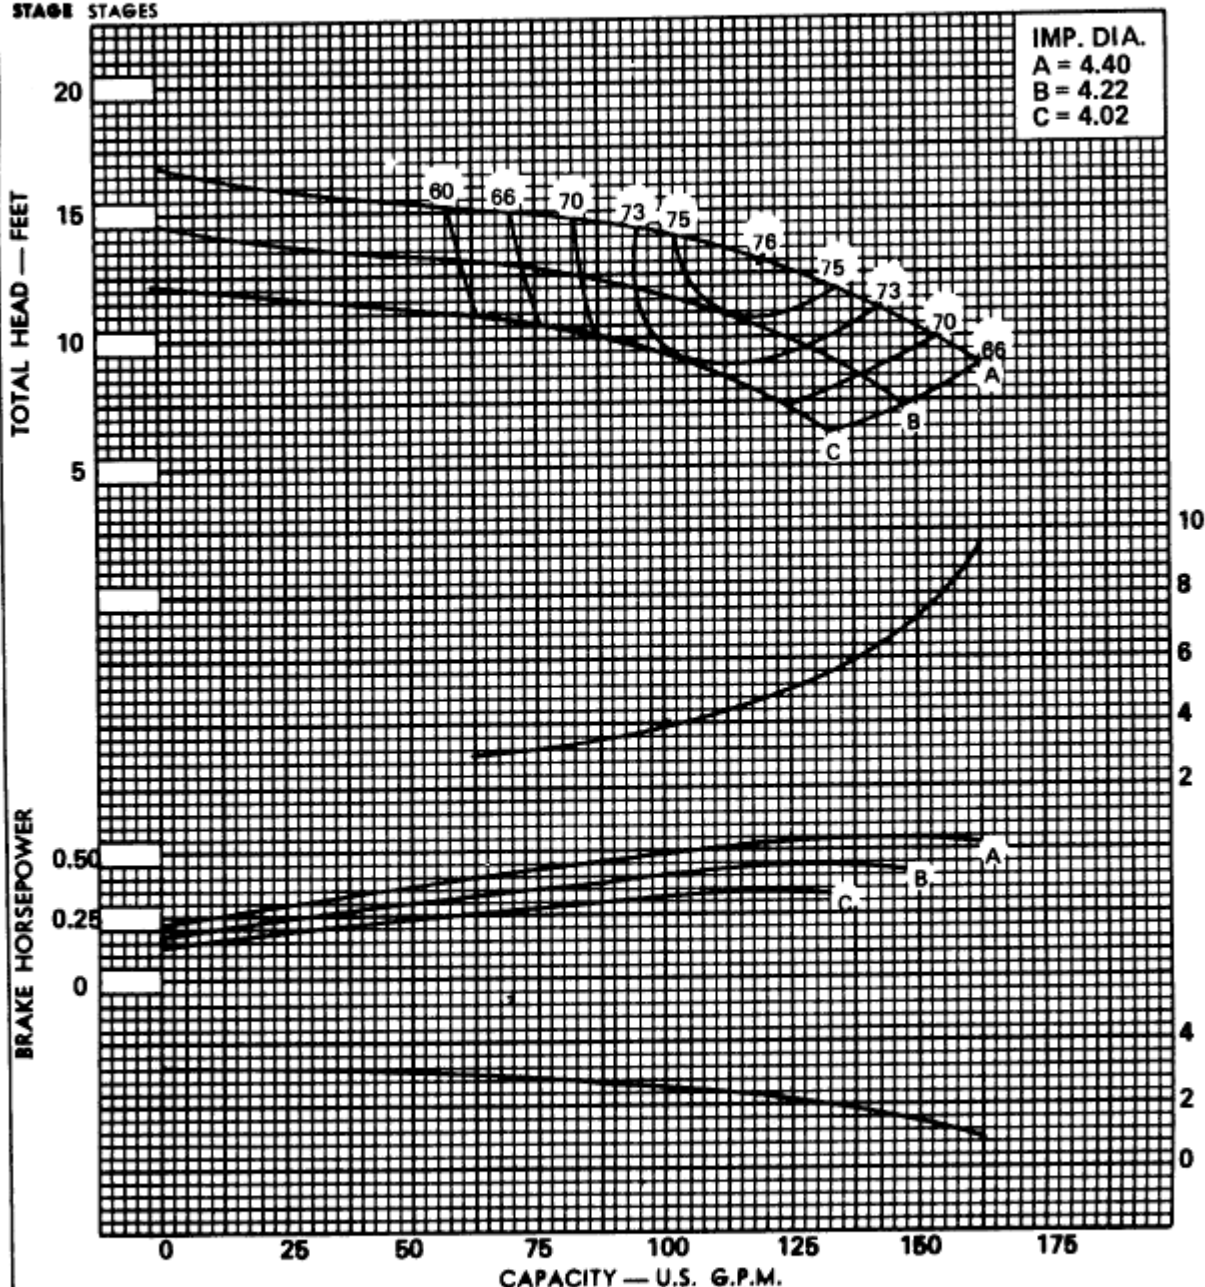

No. Stages	Eff. Change	MATERIAL	Eff. Change	Rotor Wt.	= 3.2 lbs.
1	-2	BOWL		One Stage Wt.	= 100 lbs.
2	-2	C. I.	0	Add One Stage Wt.	= 25 lbs.
3	-1	C.I. ENM	0	Max. No. Stages	= 28
4	0	IMPELLER		Discharge Size	= 3.4 in.
5		BRZ.	0	Suction Size	= 4 in.
6				Lateral	= 0.50 in.
				Shaft Diameter	= 0.875 in.

